


Features

- Glass Passivated Die Construction
- Diffused Junction
- Low Forward Voltage Drop, High Current Capability
- Surge Overload Rating to 30A Peak
- Designed for Printed Circuit Board Applications
- Plastic Material - UL Flammability Classification 94V-0

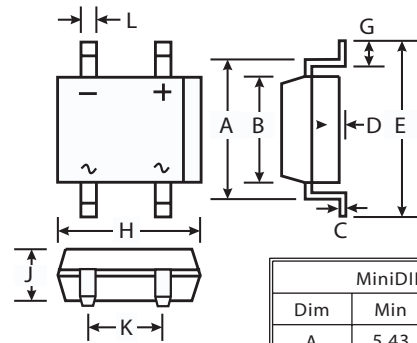

MiniDIP		
Dim	Min	Max
A	5.43	5.75
B	3.60	4.00
C	0.15	0.35
D	0.05	0.20
E	—	7.00
G	0.70	1.10
H	4.50	4.90
J	2.80	2.90
K	2.50	2.70
L	0.50	0.80
All Dimensions in mm		

Mechanical Data

- Case : Molded Plastic
- Terminals : Solder Plated Leads,
Solderable per MIL-STD-202, Method 2026
- Polarity : As Marked on Case
- Approx. Weight : 0.125 grams
- Mounting Position : Any
- Marking : Type Number

Maximum Ratings And Electrical Characteristics

(Ratings at 25°C ambient temperature unless otherwise specified, Single phase, half wave 60Hz, resistive or inductive load. For capacitive load, derate by 20%)

	Symbols	B1S	B2S	B4S	B6S	B8S	B10S	Units
Peak Repetitive Reverse voltage	V_{RMM}							
Working Peak Reverse voltage	V_{RWM}	100	200	400	600	800	1000	Volts
DC Blocking voltage	V_R							
RMS Reverse voltage	V_{RMS}	70	140	280	420	560	700	Volts
Average Rectified Output Current @ $T_A=40^\circ\text{C}$	I_o	0.8						Amp
Non-Repetitive Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	30						Amp
Forward voltage (per element) @ $I_F=0.4\text{ A}$	V_{FM}	1.0						Volts
Peak Reverse Current at Rated DC Blocking voltage (per element)	@ $T_A=25^\circ\text{C}$	10						$\mu\text{ A}$
	@ $T_A=125^\circ\text{C}$	500						
Typical Junction Capacitance per element (Note 1)	C_j	10						pF
Typical Thermal Resistance, Junction to Ambient (Note 2)	$R_{\theta JA}$	75						$^\circ\text{C}/\text{W}$
Operating and Storage Temperature Range	T_j T_{STG}	-55 to +150						$^\circ\text{C}$

Notes:

- (1) Measured at 1.0MHz and Applied Reverse Voltage of 4.0V DC.
- (2) Thermal Resistance, junction to ambient, measured on PC board with 5.0²mm (0.03mm thick) land areas.

RATING AND CHARACTERISTIC CURVES B1S THRU B10S

