


CX-2-SM 9.6MHz to 160MHz MINIATURE AT-CUT SMD CRYSTAL

Page
1 of 2

Telephone: +44(0)1460 230000
Fax: +44(0)1460 230001
Email: sales@euroquartz.co.uk
Web: www.euroquartz.co.uk

General Description

The miniature CX-2-SM AT-cut crystals in leadless ceramic packages have been designed for surface-mounting on printed circuit boards or hybrid circuits. These crystals have a low profile and a very small footprint. Manufactured by a photo-lithographic process, the CX-2-SM is a robust crystal that has gained widespread acceptance in the industry.

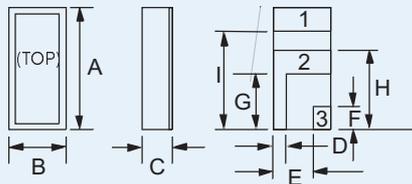

Terminal 1 is electrically connected to terminal 3


Outline

CX-2-SM Package Dimensions

Dimension	Typical (mm)	Maximum (mm)
A	6.60	6.99
B	2.39	2.74
C	-	see below
D	0.89	1.14
E	1.50	1.75
F	1.27	1.52
G	2.67	2.92
H	3.94	4.19
I	5.33	5.59

Dimension "C"	Glass Lid (mm max.)	Ceramic Lid (mm max.)
SM1	1.65	1.91
SM2	1.70	1.96
SM3	1.78	2.03

Equivalent Circuit

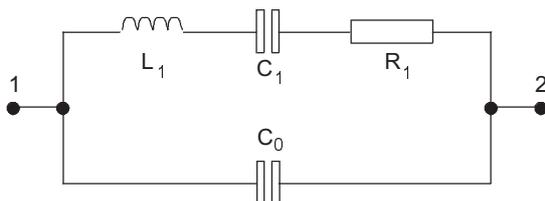

R_1 Motional Resistance L_1 Motional Inductance
 C_1 Motional Capacitance C_0 Shunt Capacitance

- Surface-mount - infrared, vapour phase, wave solder or epoxy mount techniques
- Low profile, hermetically sealed package
- Available with glass or ceramic lid
- High shock and vibration resistance
- Custom designs available
- Full military environmental testing available

Specification

Frequency Range:	9.6MHz to 160MHz
Calibration Tolerance*:	A $\pm 0.01\%$ (± 100 ppm) B $\pm 0.1\%$ C $\pm 1.0\%$
Load Capacitance:	20pF (unless other required)
Motional Resistance (R_1):	See table
Motional Capacitance (C_1):	See table
Quality Factor (Q):	See table
Shunt Capacitance (C_0):	See table
Drive Level:	500 μ W max.
Temperature Stability**:	-10° to +70°C from ± 10 ppm -40° to +85°C from ± 20 ppm -55° to +125°C from ± 30 ppm
Ageing, first year:	± 5 ppm max.
Shock, survival***:	3000g 0.3ms, 1/2 sine
Vibration, survival:	20g rms 10-2,000Hz random
Operating Temperature:	-10°~+70°C (commercial) -40°~+85°C (industrial) -55°~+125°C (military)
Storage Temperature:	-55°C~+125°C
Process Temperature:	260°C for 20 seconds

Specifications are typical at 25°C unless otherwise indicated. Frequency stability characteristics follow that of AT-cut, thickness-shear mode crystals.

- * Closer calibration available, as low as ± 5 ppm
- ** Does not include calibration tolerance
- ** A higher shock version is available, refer to data sheet for the model CX-1HG

CX-2-SM Motional Parameters, Q and C_0

Frequency	Motional Resistance R_1 (Ω)	Motional Capacitance C_1 (fF)	Quality Factor '000s	Shunt Capacitance C_0 (pF)
10.0MHz	60	2.8	95	1.4
32MHz	20	7.8	36	2.4
155MHz	50	0.5	41	3.2


CX-2-SM
9.6MHz to 160MHz
 MINIATURE AT-CUT
 SMD CRYSTAL

Page
 2 of 2

Telephone: +44(0)1460 230000
 Fax: +44(0)1460 230001
 Email: sales@euroquartz.co.uk
 Web: www.euroquartz.co.uk

Circuit Design


Conventional HCMOS Pierce Oscillator Circuit

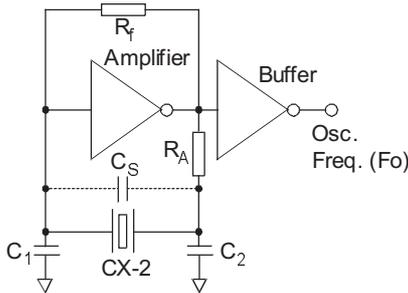

Packaging

- CX-1-SM - Bulk Pack (Standard)
- 16mm tape, 178mm or 330mm reels (Optional) per EIA 481
- Tray Pack (Optional)


Solder Pad Layout



Terminations

Designation	Termination
SM1	Gold Plated
SM2	Nickel, Silver Plated
SM3	Nickel, Solder Plated and Solder Dipped

Order Code

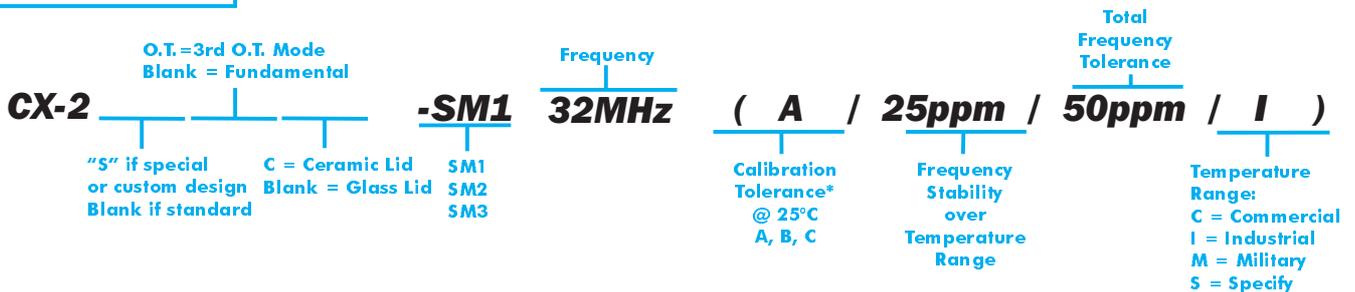

*For other calibration tolerances enter figure in ppm