

isc Silicon NPN Power Transistor

2SD2500

DESCRIPTION



- High Breakdown Voltage-
: $V_{CBO}=1500V$ (Min)
- High Switching Speed
- Low Saturation Voltage

APPLICATIONS

- Designed for Color TV horizontal deflection output applications

ABSOLUTE MAXIMUM RATINGS($T_a=25^{\circ}C$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	1500	V
V_{CEO}	Collector-Emitter Voltage	600	V
V_{EBO}	Emitter-Base Voltage	5	V
I_C	Collector Current- Continuous	10	A
I_{CP}	Collector Current- Pulse	20	A
I_B	Base Current- Continuous	5	A
P_C	Collector Power Dissipation @ $T_C=25^{\circ}C$	50	W
T_J	Junction Temperature	150	$^{\circ}C$
T_{stg}	Storage Temperature Range	-55~150	$^{\circ}C$

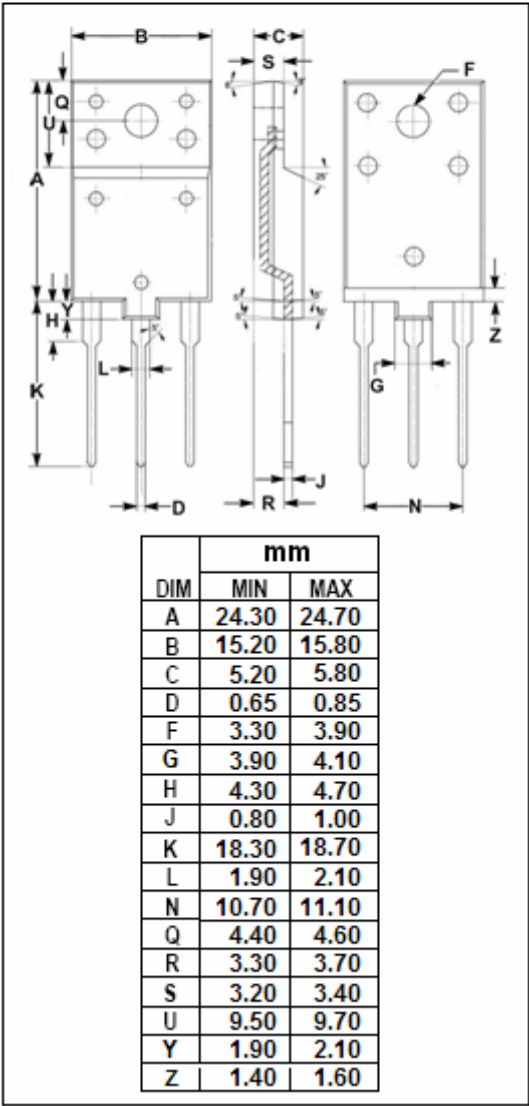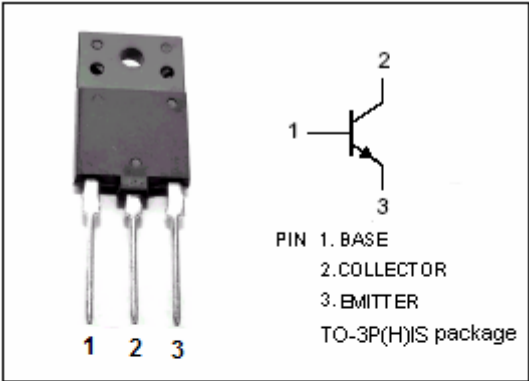

isc Silicon NPN Power Transistor**2SD2500****ELECTRICAL CHARACTERISTICS****T_C=25°C unless otherwise specified**




SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{CE(sat)}	Collector-Emitter Saturation Voltage	I _C = 6A; I _B = 1.5A			3.0	V
V _{BE(sat)}	Base-Emitter Saturation Voltage	I _C = 6A; I _B = 1.5A			1.4	V
I _{CBO}	Collector Cutoff Current	V _{CB} = 1500V ; I _E = 0			1.0	mA
I _{EBO}	Emitter Cutoff Current	V _{EB} = 5V ; I _C = 0			10	μ A
h _{FE -1}	DC Current Gain	I _C = 1A ; V _{CE} = 5V	10		30	
h _{FE -2}	DC Current Gain	I _C = 6A ; V _{CE} = 5V	4		8	
f _T	Current-Gain—Bandwidth Product	I _C = 0.1A ; V _{CE} = 10V		1.7		MHz
C _{OB}	Output Capacitance	I _E = 0 ; V _{CB} = 10V; f _{test} = 1.0MHz		135		pF

Switching times


t _{stg}	Storage Time	I _{CP} = 6A , I _{B1(end)} = 1.5A, f _H = 15.75kHz			11	μ s
t _f	Fall Time				0.7	μ s

isc Silicon NPN Power Transistor

2SD2500

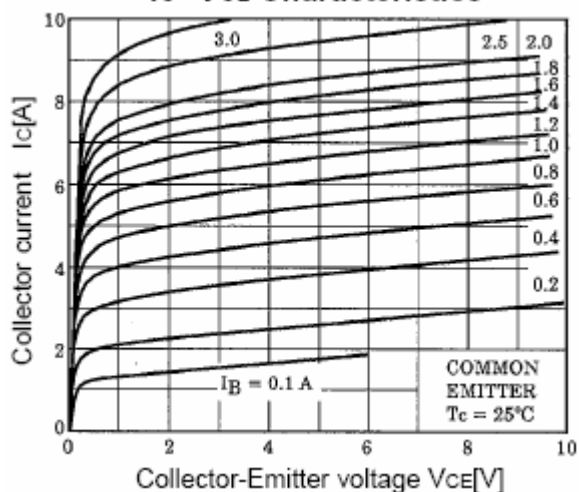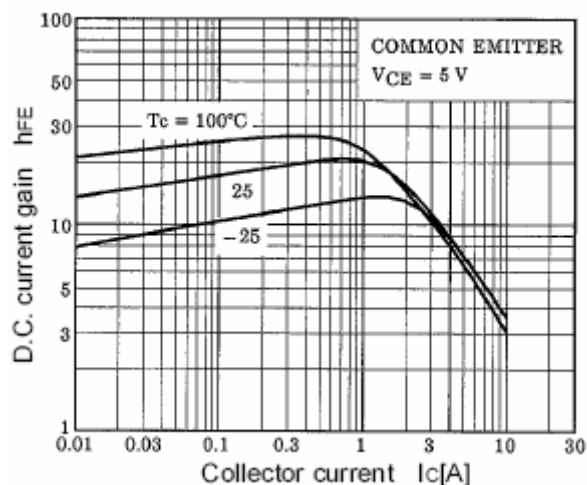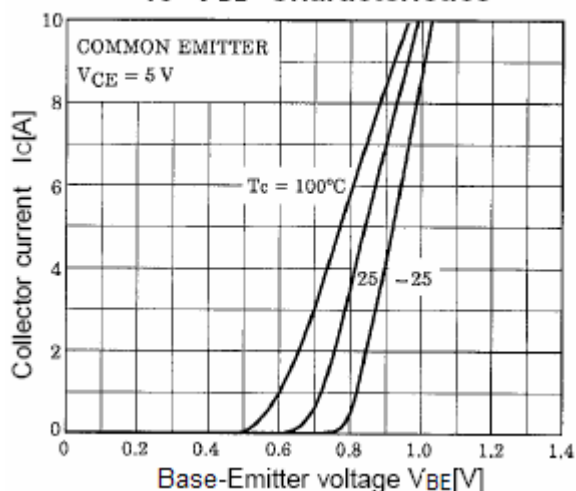 I_C - V_{CE} Characteristics h_{FE} - I_C Characteristics I_C - V_{BE} Characteristics

Power Derating

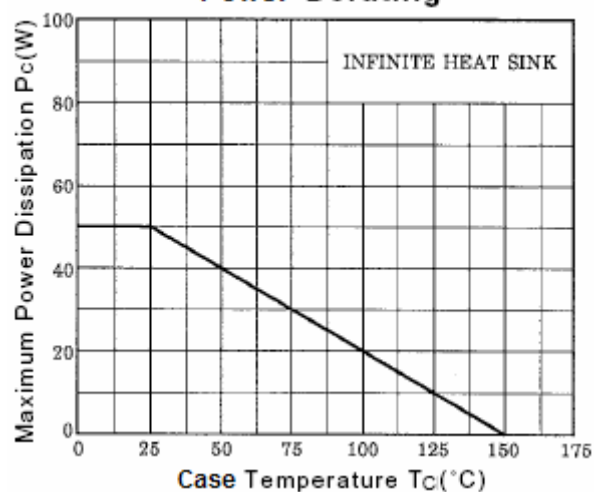

Safe Operating Area

