

## Decade Divider, Single In-Line Network



Precision resistor networks comprised of series-connected decade values are provided in single-in-line style with edgemounted leads on 100 mil centers. Integrated thin film construction, laser-trimmed to extremely tight tolerances, insures exceptionally close tracking over temperature and throughout operating life, in either voltage division or current monitoring mode. Voltage coefficient and noise are extremely low. Designers gain several advantages over the use of discrete resistor sets, including smaller size, better overall tracking, greater reliability, and lower cost.

### FEATURES


- Lead (Pb)-free available
- Tight Ratio Tolerance (0.01 %)
- 5 Decade Ratio Divider
- High Voltage Capability (300 V)



### TYPICAL PERFORMANCE

	ABS	TRACKING
TCR	25	2
	ABS	RATIO
TOL	0.1	0.01


### SCHEMATIC

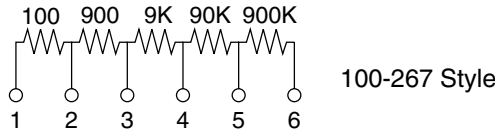

THROUGH HOLE NETWORKS


STANDARD ELECTRICAL SPECIFICATIONS			
TEST		SPECIFICATIONS	CONDITIONS
Model		100 - 267	
TCR:	Tracking	± 5 ppm/°C	0 °C to + 70 °C
	Absolute	± 25 ppm/°C	0 °C to + 70 °C
Tolerance:	Ratio	± 0.01 % to ± 0.1 %	+ 25 °C
	Absolute	± 0.1 %	+ 25 °C
Power Rating:	Resistor	100 mW	Max. at + 70 °C
	Package	500 mW	Max. at + 70 °C
Stability:	ΔR Ratio	1000 ppm absolute	2000 hours at + 70 °C
Voltage Coefficient		0.1 ppm/V	
Working Voltage		300 V	
Operating Temperature Range		0 °C to + 70 °C	
Storage Temperature Range		- 55 °C to + 125 °C	
Noise		- 20 dB	
Thermal EMF		0.08 μV/°C	
Shelf Life Stability:	Absolute	100 ppm	1 year at + 25 °C
	Ratio	20 ppm	1 year at + 25 °C

\* Pb containing terminations are not RoHS compliant, exemptions may apply

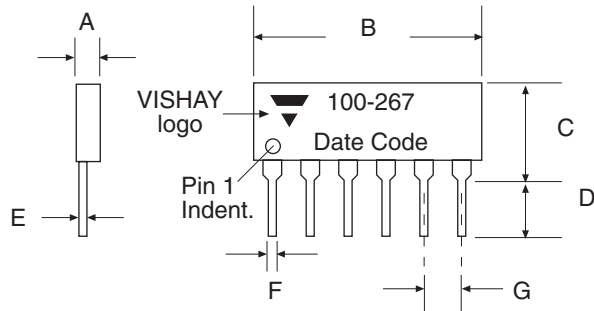**DIMENSIONS AND IMPRINTING** in inches and millimeters


DIMENSION	INCHES	MILLIMETERS
A	0.100 Max.	2.54
B	0.620 Max.	15.78
C	0.350 Max.	8.89
D	0.125 Min.	0.25
E	0.010 Typ.	2.54
F	0.020 Typ.	0.51
G	0.1 (5x) Typ.	2.54

PART NUMBER	100-267-T	267-Q	267-A	267-B
Ratio Tolerance	*0.01 %	0.025 %	0.05 %	0.1 %
Voltage Rating	300 V			
Noise Index	< - 30 dB			
* Excluding the 100 Ω				

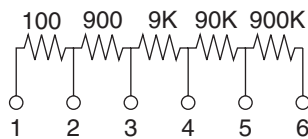

$$\frac{R1 + R2 + R3 + R4}{RT} = \frac{100 \text{ k}\Omega}{1 \text{ M}\Omega} = 0.1$$

$$\frac{R1 + R2 + R3}{RT} = \frac{10 \text{ k}\Omega}{1 \text{ M}\Omega} = 0.01$$

$$\frac{R1 + R2}{RT} = \frac{1 \text{ k}\Omega}{1 \text{ M}\Omega} = 0.001$$

$$R1 = 100 \Omega \pm 0.1 \%$$

MECHANICAL SPECIFICATIONS	
Resistive Element	Passivated Nichrome
Substrate Material	Alumina
Body	Conformal Coated
Terminals	Copper Alloy
Plating	Sn60
Marking Resistance to Solvents	per MIL-PRF-83401
Lead (Pb)-free Option	96.5 % Sn, 3.0 % Ag, 0.5 % Cu
Lead (Pb)-free Finish	Hot Solder Dip

### HOW TO ORDER

**New Global Part Numbering: VTF100-267TUF (preferred part number format)**

V	T	F	1	0	0	-	2	6	7	T	B	X	
V	T	F	1	0	0	S	-	2	6	7	T	B	X

SERIES MODEL (10 or 11 digits) <b>VTF100-267</b> (Tin Lead) <b>VTF100S-267</b> (Lead (Pb)-free) (e1)	TOLERANCE (1 digit) <b>T</b> = 0.01 % Ratio <b>Q</b> = 0.025 % Ratio <b>A</b> = 0.05 % Ratio <b>B</b> = 0.1 % Ratio	PACKAGING (2 digits) <b>BX</b> = BOXED
--	--	--

**Historical Part Number example: 100-267Q (will continue to be accepted)**

100	267	T
SERIES	MODEL	TOLERANCE



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.