

**F81216**

# **F81216D/DG**

---

## **LPC to 4 UART Datasheet**

**Release Date: August, 2007**  
**Version: V0.32P**

# F81216

## F81216 Datasheet Revision History

Version	Date	Page	Revision History
0.22P	2003/07/22		
0.23P	2003/07/31	14	Updated WDT enable timer as power-on setting 24MHz clock input : 10 sec 48MHz clock input : 5 sec
0.24P	2003/09/12	3	Updated pin description(CLKIN: pin12)
0.25P	2003/09/16	32	Updated Application circuit
0.26P	2004/7/29	3	Revised pin 2 description
0.27P	2005/1/6	30	Added "Green Package" ordering information
0.28P	2005/4/25	22	Added Full Duplex Function for IR self test (Bit 2 of IR1 control register index F1h)
0.29P	2006/1/10	-	Updated application circuit.
0.30P	2006/03/20	-	Modified UART Clock Select Register (F0h) bit 1:0 description. Reserved 01/10/11 clock selection.
0.31P	2007/7/5	-	Company readdress
0.32P	2007/8/20	6	Modify typo of pin type (Pin 43,44,45,46,47)

Please note that all data and specifications are subject to change without notice. All the trade marks of products and companies mentioned in this data sheet belong to their respective owners.

### LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Fintek for any damages resulting from such improper use or sales.

# F81216

## Table of Content

1. General Description.....	1
2. Feature List.....	1
3. Pin Configuration .....	2
4. Pin Description.....	3
4.1 ISA/LPC Interface .....	3
4.2 UART Interface.....	4
4.3 Power .....	7
5. Functional Description .....	8
5.1 LPC Interface.....	8
5.2 UART.....	8
5.2.1 UART Port Register.....	9
5.3 IR Function .....	13
5.4 Watch Dog Timer Function.....	13
5.4.1 Watchdog Port Register .....	14
5.5 Serial IRQ .....	14
5.5.1 Start Frame.....	15
5.5.2 IRQ/Data Frame.....	15
5.5.3 Stop Frame .....	16
6. Register Description.....	16
6.1 Global Control Register .....	19
6.1.1 Software Reset Register – index 02h.....	19
6.1.2 Logic Device Select Register – index 07h.....	19
6.1.3 Device ID Register– index 20h, 21h.....	19
6.1.4 Vendor ID Register– index 23h, 24h.....	19
6.1.5 Clock Source Select Register – index 25h.....	20
6.1.6 Test Mode Register – index 2Fh .....	20
6.2 UART 1 Device Control Register (LDN 0) .....	20
6.2.1 Device Enable Register – index 30h.....	20
6.2.2 I/O Port Select Register – index 60h.....	20
6.2.3 I/O Port Select Register – index 61h.....	21
6.2.4 IRQ Channel Select Register – index 70h .....	21
6.2.5 UART 1 Clock Select Register – index F0h .....	21
6.2.6 IR1 Control Register – index F1h.....	22
6.3 UART 2 Device Control Register (LDN 1) .....	22
6.3.1 Device Enable Register – index 30h.....	22

# F81216

6.3.2	I/O Port Select Register – index 60h.....	22
6.3.3	I/O Port Select Register – index 61h.....	23
6.3.4	IRQ Channel Select Register – index 70h .....	23
6.3.5	UART 2 Clock Select Register – index F0h .....	23
6.4	UART 3 Device Control Register (LDN 2) .....	23
6.4.1	Device Enable Register – index 30h.....	24
6.4.2	I/O Port Select Register – index 60h.....	24
6.4.3	I/O Port Select Register – index 61h.....	24
6.4.4	IRQ Channel Select Register – index 70h .....	24
6.4.5	UART 3 Clock Select Register – index F0h .....	25
6.5	UART 4 Device Control Register (LDN 3) .....	25
6.5.1	Device Enable Register – index 30h.....	25
6.5.2	I/O Port Select Register – index 60h.....	25
6.5.3	I/O Port Select Register – index 61h.....	25
6.5.4	IRQ Channel Select Register – index 70h .....	26
6.5.5	UART 4 Clock Select Register – index F0h .....	26
6.6	Watch Dog Timer Device Control Register (LDN 8) .....	26
6.6.1	Device Enable Register – index 30h.....	26
6.6.2	I/O Port Select Register – index 60h.....	26
6.6.3	I/O Port Select Register – index 61h.....	27
6.6.4	IRQ Channel Select Register – index 70h .....	27
6.6.5	Timer Status and Control Register – index F0h.....	27
6.6.6	Timer Count Number Register – index F1h.....	28
7.	Electron Characteristic .....	29
7.1	Absolute Maximum Ratings .....	29
7.2	DC Characteristics .....	29
8.	Ordering Information .....	30
9.	Package Dimensions .....	31
10.	Application Circuit.....	32

# F81216

## 1. General Description

The F81216 mainly provides 3 pure UART ports and one UART+ IR port through LPC. Each UART includes 16-byte send/receive FIFO, a programmable baud rate generator, complete modem control capability and an interrupt system.


One watch dog timer is provided for system controlling and the time interval can be programmed by register or hardware power on setting pin. One clock 24/48MHz input is necessary, and default is 24MHz. Powered by 3.3V voltage, the F81216 is in the small 48pin LQFP package (7mm x 7mm).

## 2. Feature List

- Supports LPC interface
- Totally provides 4 UART (16550 asynchronous) ports
  - 3 Pure UART
  - 1 UART+IR
- 1 watch dog timer with WDTOUT# signal
- 1 frequency input 24/48MHz
- Powered by 3Vcc
- 48-LQFP(7mm x 7mm)

# F81216

## 3. Pin Configuration

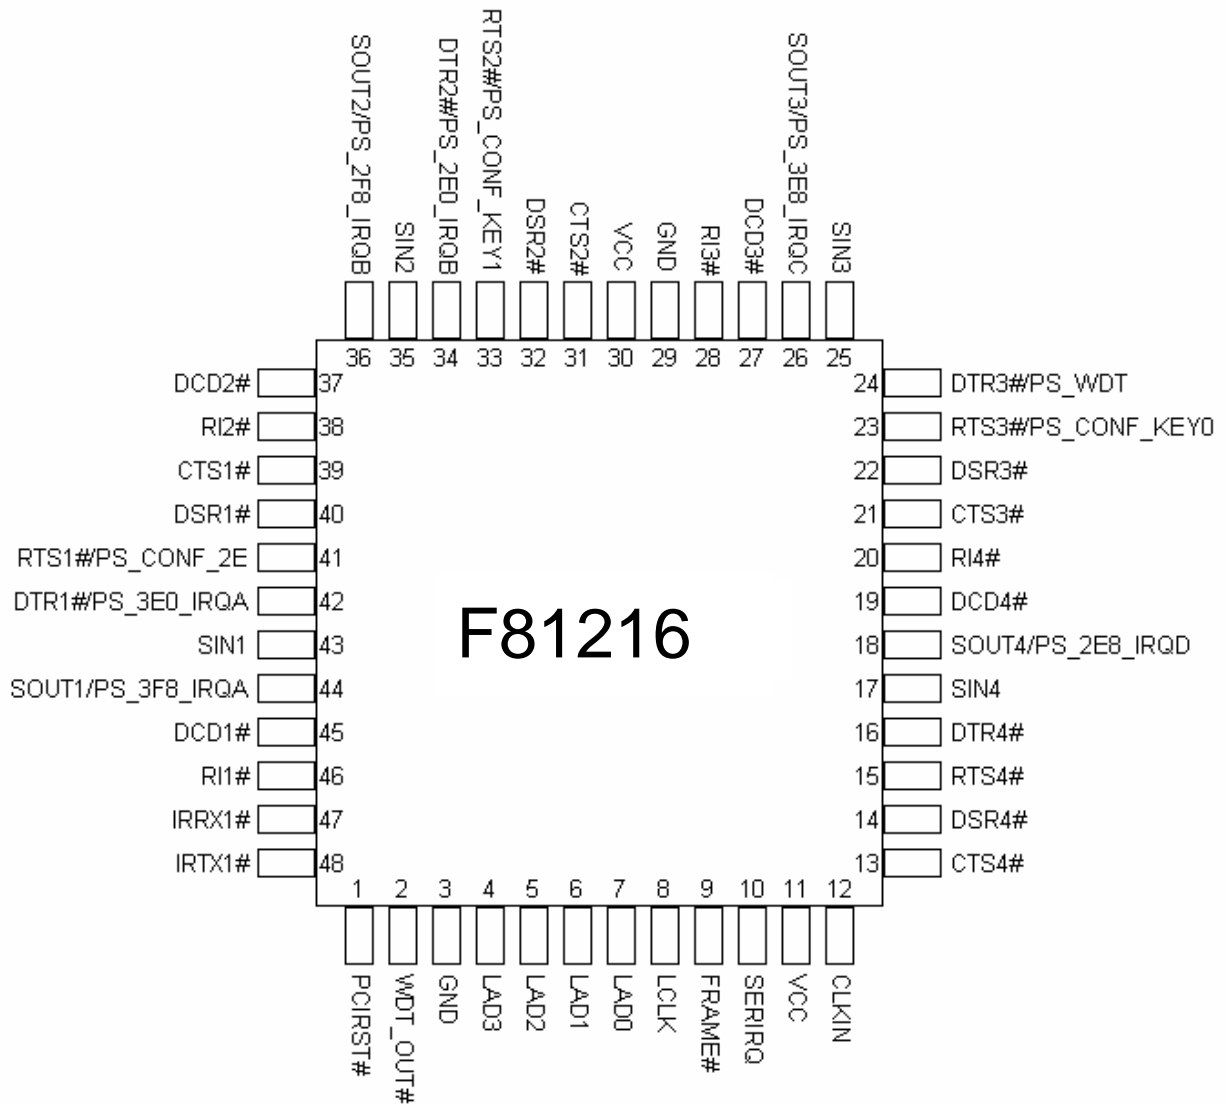

## 4. Pin Description

- I/O<sub>8t5V-d100</sub> - TTL level bi-directional pin with 8 mA source-sink capability, 5V tolerance, pull-down 100K ohms  
 I/O<sub>12t</sub> - TTL level bi-directional pin with 12 mA source-sink capability  
 I/OD<sub>12</sub> - TTL level bi-directional pin, Open-drain output with 12 mA sink capability  
 PCI<sub>5V</sub> - bi-direction pin, slew rate control, 5V tolerance.  
 OUT<sub>12</sub> - Output pin with 12 mA source-sink capability  
 OD<sub>12</sub> - Open-drain output pin with 12 mA sink capability  
 IN<sub>t</sub> - TTL level input pin  
 IN<sub>t5V</sub> - TTL level input pin and 5V tolerance.  
 IN<sub>ts</sub> - TTL level input pin and schmitt trigger  
 IN<sub>ts5V</sub> - TTL level input pin and Schmitt trigger, 5V tolerance.  
 P - Power

### 4.1 ISA/LPC Interface

Pin No.	Pin Name	Type	Description
1	PCIRST#	IN <sub>ts</sub>	System PCI reset active low.
2	WDT_OUT#	OD <sub>12</sub>	Watch dog timer output. When pin 24 power on setting PS_WDT=0(default), Watch Dog timer time interval setting is programmed by register. Once power on setting PS_WDT=1, watch dog timer time interval will be fixed to 10 sec.
4~7	LPC_LAD[3:0]	PCI <sub>5V</sub>	When in LPC mode, these signal lines communicate address, control, and data information over the LPC bus between a host and a peripheral.
8	LCLK	IN <sub>ts5V</sub>	In LPC mode, this pin acts as PCI clock input.
9	FRAME#	IN <sub>ts5V</sub>	In LPC mode, indicates start of a new cycle or termination of a broken cycle.
10	SERIRQ	PCI <sub>5V</sub>	In LPC mode, Serial IRQ input/Output.
12	CLKIN	IN <sub>t5V</sub>	Clock Input

# F81216

## 4.2 UART Interface

Pin No.	Pin Name	Type	Description
13	CTS4#	IN <sub>t5V</sub>	Clear To Send is the modem control input.
14	DSR4#	IN <sub>t5V</sub>	Data Set Ready. An active low signal indicates the modem or data set is ready to establish a communication link and transfer data to the UART.
15	RTS4#	I/O <sub>8t5V-d100</sub>	UART 4 Request To Send. An active low signal informs the modem or data set that the controller is ready to send data.
16	DTR4#	I/O <sub>8t5V-d100</sub>	UART 4 Data Terminal Ready. An active low signal informs the modem or data set that controller is ready to communicate.
17	SIN4	IN <sub>t5V</sub>	Serial Input. Used to receive serial data through the communication link.
18	SOUT4	I/O <sub>8t5V-d100</sub>	UART 4 Serial Output. Used to transmit serial data out to the communication link.
	PS_2E8_IRQD		Power setting pin to define the IRQD index. <b>Default PS_2E8_IRQD = 0</b> , IRQF index is programmed by register. If PS_2E8_IRQD = 1, setting IRQF index to 0x2E8.
19	DCD4#	IN <sub>t5V</sub>	Data Carrier Detect. An active low signal indicates the modem or data set has detected a data carrier.
20	RI4#	IN <sub>t5V</sub>	Ring Indicator. An active low signal indicates that a ring signal is being received from the modem or data set.
21	CTS3#	IN <sub>t5V</sub>	Clear To Send is the modem control input.
22	DSR3#	IN <sub>t5V</sub>	Data Set Ready. An active low signal indicates the modem or data set is ready to establish a communication link and transfer data to the UART.
23	RTS3#	I/O <sub>8t5V-d100</sub>	UART 3 Request To Send. An active low signal informs the modem or data set that the controller is ready to send data.
	PS_CONF_KEY0		Power on configuration setting pin. As for detail description, please refer to register description.
24	DTR3#	I/O <sub>8t5V-d100</sub>	UART 3 Data Terminal Ready. An active low signal informs the modem or data set that controller is ready to communicate.
	PS_WDT		Power on setting pin to enable the watch dog timer. <b>Default PS_WDT=0</b> , WDT time programmed by register. When PS_WDT=1, WDT time is defined as 10 sec.



## F81216

25	SIN3	IN <sub>t5V</sub>	Serial Input. Used to receive serial data through the communication link.
26	SOUT3	I/O <sub>8t5V-d100</sub>	UART 3 Serial Output. Used to transmit serial data out to the communication link.
	PS_3E8_IRQC		Power setting pin to define the IRQC index.  <b>Default PS_3E8_IRQC = 0</b> , IRQF index is programmed by register.  If PS_3E8_IRQC = 1, setting IRQC index to 0x3E8.
27	DCD3#	IN <sub>t5V</sub>	Data Carrier Detect. An active low signal indicates the modem or data set has detected a data carrier.
28	RI3#	IN <sub>t5V</sub>	Ring Indicator. An active low signal indicates that a ring signal is being received from the modem or data set.
31	CTS2#	IN <sub>t5V</sub>	Clear To Send is the modem control input.
32	DSR2#	IN <sub>t5V</sub>	Data Set Ready. An active low signal indicates the modem or data set is ready to establish a communication link and transfer data to the UART.
33	RTS2#	I/O <sub>8t5V-d100</sub>	UART 2 Request To Send. An active low signal informs the modem or data set that the controller is ready to send data.
	PS_CONF_KE Y1		Power on configuration setting pin. As for detail description, please refer to register description.
34	DTR2#	I/O <sub>8t5V-d100</sub>	UART 2 Data Terminal Ready. An active low signal informs the modem or data set that controller is ready to communicate.
	PS_2E0_IRQB		Power setting pin to define the IRQB index.  <b>Default PS_2E0_IRQB = 0</b> , IRQB index is programmed by register.  If PS_2E0_IRQB = 1, setting IRQB index to 0x2E0.
35	SIN2	IN <sub>t5V</sub>	Serial Input. Used to receive serial data through the communication link.
36	SOUT2	I/O <sub>8t5V-d100</sub>	UART 2 Serial Output. Used to transmit serial data out to the communication link.
	PS_2F8_IRQB		Power setting pin to define the IRQB index.  <b>Default PS_2F8_IRQB = 0</b> , IRQB index is programmed by register.  If PS_2F8_IRQB = 1, setting IRQB index to 0x2F8.

## F81216

37	DCD2#	IN <sub>t5V</sub>	Data Carrier Detect. An active low signal indicates the modem or data set has detected a data carrier.
38	RI2#	IN <sub>t5V</sub>	Ring Indicator. An active low signal indicates that a ring signal is being received from the modem or data set.
39	CTS1#	IN <sub>t5V</sub>	Clear To Send is the modem control input.
40	DSR1#	IN <sub>t5V</sub>	Data Set Ready. An active low signal indicates the modem or data set is ready to establish a communication link and transfer data to the UART.
41	RTS1#	I/O <sub>8t5V-d100</sub>	UART 1 Request To Send. An active low signal informs the modem or data set that the controller is ready to send data.
	PS_CONF_2E		Power on configuration setting. Default PS_CONF_2E = 0, setting the configuration to 0x4E. If PS_CONF_2E = 1, setting the configuration to 0x2E.
42	DTR1#	I/O <sub>8t5V-d100</sub>	UART 1 Data Terminal Ready. An active low signal informs the modem or data set that controller is ready to communicate.
	PS_3E0_IRQA		Power setting pin to define the IRQA index. <b>Default PS_3E0_IRQA = 0</b> , IRQA index is programmed by register. If PS_3E0_IRQA = 1, setting IRQA index to 0x3E0.
43	SIN1	IN <sub>t5V</sub>	Serial Input. Used to receive serial data through the communication link.
44	SOUT1	I/O <sub>8t5V-d100</sub>	UART 1 Serial Output. Used to transmit serial data out to the communication link.
	PS_3F8_IRQA		Power setting pin to define the IRQA index. <b>Default PS_3F8_IRQA = 0</b> , IRQA index is programmed by register. If PS_3F8_IRQA = 1, setting IRQA index to 0x3F8.
45	DCD1#	IN <sub>t5V</sub>	Data Carrier Detect. An active low signal indicates the modem or data set has detected a data carrier.
46	RI1#	IN <sub>t5V</sub>	Ring Indicator. An active low signal indicates that a ring signal is being received from the modem or data set.
47	IRRX1	IN <sub>t5V</sub>	Infrared Receiver input.
48	IRTX1	OUT <sub>12</sub>	Infrared Transmitter Output.

**F81216****4.3 Power**

Pin No.	Pin Name	Type	Description
11,30	VCC	P	3.3V power supply.
3, 29	GND	P	Ground.

Fintek Confidential  
Do Not Copy!

# F81216

## 5. Functional Description

The F81216 totally provides 4 UART ports through LPC interface. Among 4 UART ports, one ports can support serial infrared communication. Besides, each UART includes 16-byte send/receive FIFO, a programmable baud rate generator, completed modem control capability and interrupt system.

One watch dog timer is provided for system controlling and the time interval can be programmed by register or hardware power on setting pin.

This IC needs one clock 24/48MHz input, and default is 24MHz. Powered by 3.3V voltage, the F81216 is in 48 pin LQFP

### 5.1 LPC Interface

The F81216 can support LPC interface serving as a bus interface between host (chipset) and peripheral (I/O chip) by hardware trapping. This interface provides much less pins and more efficient transmission. Data transfer on the LPC bus is serialized over a 4 bit bus. The general characteristics of the interface implemented in F81216 are listed as below:

- ◆ One control line, namely LPC\_FRAME#, which is used by the host to start or stop transfers. No peripherals drive this signal.
- ◆ The LPC\_LAD[3:0] bus, which communicates information serially. The information conveyed is cycle type, cycle direction, chip selection, address, data, and wait states.
- ◆ PCIRST# is an active low reset signal.
- ◆ An additional 33 MHz PCI clock is needed in the F81216 for synchronization.
- ◆ Interrupt requests are issued through LPC\_SERIRQ.

### 5.2 UART

A Universal Asynchronous Receiver/Transmitter (UART) is used to implement serial communication. The F81216 incorporates four fully function UART compatible with NS16550D. The UART ports perform serial to parallel conversion on receiving characters and parallel to serial conversion on transmitting characters. The controllable characteristics of the data

# F81216

transmission are baud rate, number of information bits per character, type of parity checking, number of stop bits and breaking the transmission. The serial format is a start bit, followed by five to eight data bits, a parity bit(if programmable), and one, one and half, or two stop bits. The UART also includes completed modem control capability and interrupt system that may be software trailed to the computing time required to handle the communication link. The UART also has a FIFO mode to reduce the number of interrupts presented to the CPU. In the UART, there is 16-byte FIFO for both receive and transmit mode.

## 5.2.1 UART Port Register

### 5.2.1.1 Receiver Buffer Register – Base + 0

Power-on default [7:0] = 0x00h.

Bit	Name	R/W	Description
7:0	RBR[7:0]	R	The data received . Read only when LCR[7] is 0

### 5.2.1.2 Transmitter Holding Register – Base + 0

Power-on default [7:0] = 0x00h.

Bit	Name	R/W	Description
7:0	THR[7:0]	W	Data to be transmitted. Write only when LCR[7] is 0

### 5.2.1.3 Divisor Latch ( LS ) – Base + 0

Power-on default [7:0] = 0x01h.

Bit	Name	R/W	Description
7:0	DLL[7:0]	R/W	Baud generator divisor low byte. Access only when LCR[7] is 1.

### 5.2.1.4 Divisor Latch ( MS ) – Base + 1

Power-on default [7:0] = 0x00h.

Bit	Name	R/W	Description
7:0	DLM[7:0]	R/W	Baud generator divisor high byte. Access only when LCR[7] is 1.

# F81216

## 5.2.1.5 Interrupt Enable Register – Base + 1

Power-on default [7:0] = 0x00h.

Bit	Name	R/W	Description
7:4	Reserved	R/W	Return 0 when read. Access only when LCR[7] is 0
3	EDSSI	R/W	Enable Modem Status Interrupt. Access only when LCR[7] is 0.
2	ELSI	R/W	Enable Line Status Error Interrupt. Access only when LCR[7] is 0.
1	ETBFI	R/W	Enable Transmitter Holding Register Empty Interrupt. Access only when LCR[7] is 0.
0	ERBFI	R/W	Enable Received Data Available Interrupt. Access only when LCR[7] is 0

## 5.2.1.6 Interrupt Identification Register – Base + 2

Power-on default [7:0] = 0x01h.

Bit	Name	R/W	Description
7	FIFO_EN	R	0 : FIFO is disabled 1 : FIFO is enabled.
6	FIFO_EN	R	0 : FIFO is disabled. 1 : FIFO is enabled.
5:4	Reserved	R	Return 0 when read.
3:1	IRQ_ID[2:0]	R	000 : Interrupt is caused by Modem Status 001 : Interrupt is caused by Transmitter Holding Register Empty 010 : Interrupt is caused by Received Data Available. 110 : Interrupt is caused by Character Timeout 011 : Interrupt is caused by Line Status..
0	IRQ_PENDN	R	1 : Interrupt is not pending. 0 : Interrupt is pending.

## 5.2.1.7 FIFO Control Register – Base + 2

Power-on default [7:0] = 0x00h.

Bit	Name	R/W	Description
7:6	RCVR_TRIG[1:0]	W	00 : Receiver FIFO trigger level is 1. 01 : Receiver FIFO trigger level is 4. 10 : Receiver FIFO trigger level is 8.

## F81216

			11 : Receiver FIFO trigger level is 14.
5:3	Reserved	W	
2	CLRTX	W	1 : Reset the transmitter FIFO.
1	CLRRX	W	1 : Reset the receiver FIFO.
0	FIFO_EN	W	0 : Disable FIFO 1 : Enable FIFO

### 5.2.1.8 Line Control Register – Base + 3

Power-on default [7:0] = 0x00h.

Bit	Name	R/W	Description
7	DLAB	R/W	0 : Divisor Latch can't be accessed. 1 : Divisor Latch can be accessed via Base and Base+1.
6	SETBRK	R/W	1 : Transmit a break condition. 0 : Transmitter is in normal condition.
5:3	STKPAR EPS PEN	R/W	XX0 : Parity Bit is disable 001 : Parity Bit is odd. 011 : Parity Bit is even 101 : Parity Bit is logic 1 111 : Parity Bit is logic 0
2	STB	R/W	0 : Stop bit is one bit 1 : When word length is 5 bit stop bit is 1.5 bit else stop bit is 2 bit
1:0	WLS[1:0]	R/W	00 : Word length is 5 bit 01 : Word length is 6 bit 10 : Word length is 7 bit 11 : Word length is 8 bit

### 5.2.1.9 MODEM Control Register – Base + 4

Power-on default [7:0] = 0x00h.

Bit	Name	R/W	Description
7:5	Reserved	R/W	Return 0 when read.
4	LOOP	R/W	0 : UART in normal condition. 1 : UART is internal loop back

## F81216

3	OUT2	R/W	0 : All interrupt is disable. 1 : Interrupt is enabled/disabled by IER.
2	OUT1	R/W	Read from MSR[6] is loop back mode
1	RTS	R/W	0 : RTS# is forced to logic 1 1 : RTS# is forced to logic 0
0	DTR	R/W	0 : DTR# is forced to logic 1 1 : DTR# is forced to logic 0

### 5.2.1.10 Line Status Register – Base + 5

Power-on default [7:0] = 0x60h.

Bit	Name	R/W	Description
7	RCR_ERR	R	0 : No error in the FIFO when FIFO is enabled 1 : Error in the FIFO when FIFO is enabled.
6	TEMT	R	0 : Transmitter is in transmitting. 1 : Transmitter is empty.
5	THRE	R	0 : Transmitter Holding Register is not empty. 1 : Transmitter Holding Register is empty.
4	BI	R	0 : No break condition detected. 1 : A break condition is detected.
3	FE	R	0 : Data received has no frame error. 1 : Data received has frame error.
2	PE	R	0 : Data received has no parity error. 1 : Data received has parity error.
1	OE	R	0 : No overrun condition occur. 1 : A overrun condition occur.
0	DR	R	0 : No data is ready for read. 1 : Data is received .

### 5.2.1.11 MODEM Status Register – Base + 6

Power-on default [7:0] = 0xX0h.

Bit	Name	R/W	Description
7	DCD	R	Complement of DCD# input. In loop back mode, this bit is equivalent to OUT2 in MCR.
6	RI	R	Complement of RI# input. In loop back mode , this bit is equivalent to



## F81216

			OUT1 in MCR
5	DSR	R	Complement of DSR# input. In loop back mode , this bit is equivalent to DTR in MCR
4	CTS	R	Complement of CTS# input. In loop back mode , this bit is equivalent to RTS in MCR
3	DDCD	R	0 : No state changed at DCD#. 1 : State changed at DCD#.
2	TERI	R	0 : No Trailing edge at RI#. 1 : A low to high transition at RI#.
1	DDSR	R	0 : No state changed at DSR#. 1 : State changed at DSR#.
0	DCTS	R	0 : No state changed at CTS#. 1 : State changed at CTS#.

### 5.2.1.11 Scratch Register – Base + 7

Power-on default [7:0] = 0x00h.

Bit	Name	R/W	Description
7:0	SCR_DATA[7:0]	R/W	Scratch register.

## 5.3 IR Function

The F81216 infrared interface provides a two way wireless communications port using infrared as the transmission medium. The IrDA 1.0 (SIR) is found in UART1 IrDA SIR specifies asynchronous serial communication at baud rate up to 115.2Kbps. Each byte is sent serial LSB first beginning with a zero value start bit. A zero is signaled by sending a single infrared pulse at the beginning of the serial bit time. A one is signaled by the absence of an infrared pulse during the bit time. IRTX acts as a transmit pin and IRRX acts as a receiving one. As for detail description, please refer to register description.

## 5.4 Watch Dog Timer Function

Watch dog timer is provided for system controlling. If time-out can trigger one signal to low level, the signal default is tri-state (need external pull up resistor).

The time interval has three ways:

One is the hardware power on setting to enable, timer set to 10 second (24MHz). If 48MHz clock input, the timer is set to 5 second.

# F81216

Two is programmed by registers.

The other is set the base address into registers, and use the base address the control it.

The timer unit has three kinds: 10mS, 1S, 1Min.

## 5.4.1 Watchdog Port Register

### 5.4.1.1 Timer Status and Control Register – Base + 0

Power-on default [7:0] = 0x02 when DTR3#/PS\_WDT is pull-up, else 0x0.

Bit	Name	R/W	Description
7:3	Reserved	R/W	Return 0 when read.
2:1	WDT_UNIT[1:0]	R/W	00 : Timer Unit is 10ms. 01 : Timer Unit is 1 second 10 : Timer Unit is 1 minute. 11 : reserved.
0	WDT_EVENT	R/W	When read 0 : no time out occur. 1 : time out has occurred. when write 0 : no action 1 : clear the time out status.

### 5.4.1.2 Timer Count Number Register – Base + 1

Power-on default [7:0] = 0x0Ah when DTR3#/PS\_WDT is pull-up , else 0x00h.

Bit	Name	R/W	Description
7:0	WDT_CNT[7:0]	R/W	The number of count for watchdog timer. Write the same value to enable the timer, write 0 to disable timer.

## 5.5 Serial IRQ

F81216 supports a serial IRQ scheme. Because more than one device may need to share the signal serial IRQ signal line, an open drain signal scheme is used. The clock source is the PCI clock. The serial interrupt is transferred on the SERIRQ signal, one cycle consisting of three frames types: a start frame, several IRQ/Data frame, and one Stop frame.

# F81216

## 5.5.1 Start Frame

There are two modes of operation for the SERIRQ Start frame: Quiet mode and Continuous mode. In the Quiet mode, the peripheral drives the SERIRQ signal active low for one clock, and then tri-states it. This brings all the states machines of the peripherals from idle to active states. The host controller will then take over driving SERIRQ signal low in the next clock and will continue driving the SERIRQ low for programmable 3 to 7 clock periods. This makes the total number of clocks low for 4 to 8 clock periods. After these clocks, the host controller will drive the SERIRQ high for one clock and then tri-states it. In the Continuous mode, only the host controller initiates the START frame to update IRQ/Data line information. The host controller drives the SERIRQ signal low for 4 to 8 clock periods. Upon a reset, the SERIRQ signal is defaulted to the Continuous mode for the host controller to initiate the first Start frame.

## 5.5.2 IRQ/Data Frame

Once the start frame has been initiated, all the peripherals must start counting frames based on the rising edge of the start pulse. Each IRQ/Data Frame is three clocks: Sample phase, Recovery phase, and Turn-around phase. During the Sample phase, the peripheral drives SERIRQ low if the corresponding IRQ is active. If the corresponding IRQ is inactive, then SERIRQ must be left tri-stated. During the Recovery phase, the peripheral device drives the SERIRQ high. During the Turn-around phase, the peripheral device left the SERIRQ tri-stated. The IRQ/Data Frame has a number of specific order, as shown in Table 5-1. The F81216 is only support IRQ3, IRQ4, IRQ5, IRQ9, IRQ10, and IRQ11.

Table 5-1 IRQSER Sampling periods

IRQ/Data Frame	Signal Sampled	# of clocks past Start
1	IRQ0	2

## F81216

2	IRQ1	5
3	SMI#	8
4	IRQ3	11
5	IRQ4	14
6	IRQ5	17
7	IRQ6	20
8	IRQ7	23
9	IRQ8	26
10	IRQ9	29
11	IRQ10	32
12	IRQ11	35
13	IRQ12	38
14	IRQ13	41
15	IRQ14	44
16	IRQ15	47
17	IOCHCK#	50
18	INTA#	53
19	INTB#	56
20	INTC#	59
21	INTD#	62
32:22	Unassigned	95

### 5.5.3 Stop Frame

After all IRQ/Data Frames have completed, the host controller will terminate SERIRQ by a Stop frame. Only the host controller can initiate the Stop frame by driving SERIRQ low for 2 or 3 clocks. If the Stop Frame is low for 2 clocks, the next SERIRQ cycle's Sample mode is the Quiet mode. If the Stop Frame is low for 3 clocks, the next SERIRQ cycle's Sample mode is the Continuous mode.

## 6. Register Description

Registers are programmed by port 0x4E and 0x4F. 0x4E is the index port and 0x4F is the data port .

## F81216

To enable configuration registers programming, entry key must output twice to index port continuously. The entry key is decided by power on setting pins RTS2#/PS\_CONF\_KEY1 and RTS3#/PS\_CONF\_KEY0 as following:

RTS2#/PS_CONF_KEY1	RTS3#/PS_CONF_KEY0	Entry key
0	0	0x77 ( default )
0	1	0xA0
1	0	0x87
1	1	0x67

To exit configuration registers programming, output 0xAA to index port.

### Sample code for configuration:

1. Clock in used 48MHz, UART 1~6 address (0x3f8, 0x2f8, 0x3e8, 0x2e8, IRQ(3, 4, 5, 9, Entry key is 0x77:

```

outputb(0x4e, 0x77);
outputb(0x4e, 0x77); //Entry configuration mode
outputb(0x4e, 0x25); //Select register index 0x25
outputb(0x4f, 0x01); //Set bit 0 to 1 select clock input to 48MHz
outputb(0x4e, 0x07); //Select register index 0x07
outputb(0x4f, 0x00); //Select LDN 0
outputb(0x4e, 0x60); //Select LDN 0 register index 0x60
outputb(0x4f, 0x03); //Set UART 1 base address high byte to 0x03
outputb(0x4e, 0x61); //Select LDN 0 register index 0x61
outputb(0x4f, 0xf8); //Set UART 1 base address low byte to 0xf8
outputb(0x4e, 0x70); //Select LDN 0 register index 0x70
outputb(0x4f, 0x03); //Set UART 1 interrupt channel to IRQ 3
outputb(0x4e, 0x30); //Select LDN 0 register index 0x30
outputb(0x4f, 0x01); //Enable UART 1

outputb(0x4e, 0x07); //Select register index 0x07
outputb(0x4f, 0x01); //Select LDN 1
outputb(0x4e, 0x60); //Select LDN 1 register index 0x60
outputb(0x4f, 0x02); //Set UART 2 base address high byte to 0x02
outputb(0x4e, 0x61); //Select LDN 1 register index 0x61
outputb(0x4f, 0xf8); //Set UART 2 base address low byte to 0xf8
outputb(0x4e, 0x70); //Select LDN 1 register index 0x70
    
```

## F81216

```

outportb(0x4f, 0x04); //Set UART 2 interrupt channel to IRQ 4
outportb(0x4e, 0x30); //Select LDN 1 register index 0x30
outportb(0x4f, 0x01); //Enable UART 2

outportb(0x4e, 0x07); //Select register index 0x07
outportb(0x4f, 0x02); //Select LDN 2
outportb(0x4e, 0x60); //Select LDN 2 register index 0x60
outportb(0x4f, 0x03); //Set UART 3 base address high byte to 0x03
outportb(0x4e, 0x61); //Select LDN 2 register index 0x61
outportb(0x4f, 0xe8); //Set UART 3 base address low byte to 0xe8
outportb(0x4e, 0x70); //Select LDN 2 register index 0x70
outportb(0x4f, 0x05); //Set UART 3 interrupt channel to IRQ 5
outportb(0x4e, 0x30); //Select LDN 2 register index 0x30
outportb(0x4f, 0x01); //Enable UART 3

outportb(0x4e, 0x07); //Select register index 0x07
outportb(0x4f, 0x03); //Select LDN 3
outportb(0x4e, 0x60); //Select LDN 3 register index 0x60
outportb(0x4f, 0x02); //Set UART 4 base address high byte to 0x02
outportb(0x4e, 0x61); //Select LDN 3 register index 0x61
outportb(0x4f, 0xe8); //Set UART 4 base address low byte to 0xe8
outportb(0x4e, 0x70); //Select LDN 3 register index 0x70
outportb(0x4f, 0x09); //Set UART 4 interrupt channel to IRQ 9
outportb(0x4e, 0x30); //Select LDN 3 register index 0x30
outportb(0x4f, 0x01); //Enable UART 4
outportb(0x4e, 0xaa); //Exit configuration mode
    
```

### 2. Set Watch Dog timer base address 0x300~0x301:

```

outportb(0x4e, 0x77);
outportb(0x4e, 0x77); //Entry configuration mode
outportb(0x4e, 0x07); //Select register index 0x07
outportb(0x4f, 0x08); //Select LDN 8
outportb(0x4e, 0x60); //Select LDN 8 register index 0x60
outportb(0x4f, 0x03); //Set Watch Dog timer base address high byte to 0x03
outportb(0x4e, 0x61); //Select LDN 8 register index 0x61
outportb(0x4f, 0x00); //Set Watch Dog Timer base address low byte to 0x00
outportb(0x4e, 0x30); //Select LDN 8 register index 0x30
    
```

# F81216

```

outportb(0x4f, 0x01); //Enable Watch Dog Timer Device
outportb(0x4e, 0xaa); //Exit configuration mode
    
```

3. Set Watch Dog timer to 20 second used base address 0x300~0x301:

```

outportb(0x300, 0x03); //Select unit to one second and clear time out status
outportb(0x301, 0x14);
outportb(0x301, 0x14); //Set timer to 20 second and enable timer
    
```

## 6.1 Global Control Register

### 6.1.1 Software Reset Register – index 02h

Power-on default [7:0] = 0x00h

Bit	Name	R/W	Description
7:1	Reserved	R/W	Return 0 when read.
0	SWRST	R/W	Write 1 to reset configuration register. This bit is auto cleared.

### 6.1.2 Logic Device Select Register – index 07h

Power-on default [7:0] = 0x00h

Bit	Name	R/W	Description
7:0	LDN[7:0]	R/W	00h : Select UART 1 device configuration register 01h : Select UART 2 device configuration register 02h : Select UART 3 device configuration register 03h : Select UART 4 device configuration register 08h : Select Watchdog Timer device configuration register

### 6.1.3 Device ID Register– index 20h, 21h

Power-on default [7:0], 0x02h for index 20h, 0x08h for index 21h

Bit	Name	R/W	Description
7:0	DEVID	R	Return 0208h when read index 20h and 21h respectively, indicate the device ID.

### 6.1.4 Vendor ID Register– index 23h, 24h

Power-on default [7:0], 0x19h for index 23h, 0x34h for index 24h



# F81216

Bit	Name	R/W	Description
7:0	VENDID	R	Return 1934h when read index 23h and 24h respectively, indicate the vendor ID of Fintek.

## 6.1.5 Clock Source Select Register – index 25h

Power-on default [7:0], 0x00h

Bit	Name	R/W	Description
7:1	Reserved	R/W	Return 0 when read.
0	CLK_SEL	R/W	1 : The CLKIN is 48MHz 0 : The CLKIN is 24MHz.  This bit must program to indicate the frequency of the clock source, or the device will not function correctly.

## 6.1.6 Test Mode Register – index 2Fh

Power-on default [7:0], 0000\_0000b

Bit	Name	R/W	Description
7:0	TESTMODE	R/W	Test mode register, reserved for Fintek use only.

## 6.2 UART 1 Device Control Register (LDN 0)

### 6.2.1 Device Enable Register – index 30h

Power-on default [7:0] = 0x01h when SOUT1/PS\_3F8\_IRQA or DTR1#/PS\_3E0\_IRQA is pull-up, else 0x00h.

Bit	Name	R/W	Description
7:1	Reserved	R/W	Return 0 when read.
0	URA_EN	R/W	0 : Disable UART 1. 1 : Enable UART 1..

### 6.2.2 I/O Port Select Register – index 60h

Power-on default [7:0] = 0x03h when SOUT1/PS\_3F8\_IRQA or DTR1#/PS\_3E0\_IRQA is pullup, else 0x00h.

Bit	Name	R/W	Description
-----	------	-----	-------------



## F81216

7:0	URA_BASE[15:8]	R/W	UART 1 I/O Port Address high byte.
-----	----------------	-----	------------------------------------

### 6.2.3 I/O Port Select Register – index 61h

Power-on default [7:0] = 0xF8h when SOUT1/PS\_3F8\_IRQA is pull-up,  
0xE0h when DTR1#/PS\_3E0\_IRQA is pull-up, else 0x00h.

Bit	Name	R/W	Description
7:0	URA_BASE[7:0]	R/W	UART 1 I/O Port Address low byte.

### 6.2.4 IRQ Channel Select Register – index 70h

Power-on default [7:0] = 0x03h when SOUT1/PS\_3F8\_IRQA or DTR1#/PS\_3E0\_IRQA is pull-up,  
else 0x00h

Bit	Name	R/W	Description
7:6	Reserved	R/W	Return 0 when read.
5	URAIRQ_MODE	R/W	0 : PCI IRQ sharing mode. 1 : ISA IRQ sharing mode. This bit is effective in IRQ sharing mode.
4	URAIRQ_SHAR	R/W	0 : IRQ is not sharing with other device. 1 : IRQ is sharing with other device.
3:0	SELURAIRQ[3:0]	R/W	Select the Serial IRQ channel.

### 6.2.5 UART 1 Clock Select Register – index F0h

Power-on default [7:0] = 0x00h.

Bit	Name	R/W	Description
7:4	Reserved	R/W	Return 0 when read.
3	RXW4C_IRA	R/W	0 : No reception delay when SIR is changed from TX to RX. 1 : Reception delay 4 character-time when SIR is changed from TX to RX.
2	TXW4C_IRA	R/W	0 : No transmission delay when SIR is changed from RX to TX. 1 : Transmission delay 4 character-time when SIR is changed from RX to TX.
1:0	SELURACLK1 SELURACLK0	R/W	00 : UART 1 clock source is 1.8462MHz ( 24MHz/13 ) 01/10/11 selection reserved.

# F81216

## 6.2.6 IR1 Control Register – index F1h

Power-on default [7:0] = 0x44h.

Bit	Name	R/W	Description
7:5	Reserved	R/W	Return 010b when read.
4:3	IRA_MODE1 IRA_MODE0	R/W	0X: Disable IR1 function. 10 : Enable IR1 function, active pulse is 1.6uS. 11 : Enable IR1 function, active pulse is 3/16 bit time.
2	Half_Full_Duplex	R/W	0 : Full Duplex function for IR self test. 1 : Half Duplex function. Return 1 when read.
1	TXINV_IRA	R/W	0 : IRTX1 is not inverted. 1 : Inverse the IRTX1.
0	RXINV_IRA	R/W	0 : IRRX1 is not inverted. 1 : Inverse the IRRX1.

## 6.3 UART 2 Device Control Register (LDN 1)

### 6.3.1 Device Enable Register – index 30h

Power-on default [7:0] = 0x01h when SOUT2/PS\_2F8\_IRQB or DTR2#/PS\_2E0\_IRQB is pull-up, else 0x00h.

Bit	Name	R/W	Description
7:1	Reserved	R/W	Return 0 when read.
0	URB_EN	R/W	0 : Disable UART 2. 1 : Enable UART 2.

### 6.3.2 I/O Port Select Register – index 60h

Power-on default [7:0] = 0x02h when SOUT2/PS\_2F8\_IRQB or DTR2#/PS\_2E0\_IRQB is pullup, else 0x00h.

Bit	Name	R/W	Description
-----	------	-----	-------------

## F81216

7:0	URB_BASE[15:8]	R/W	UART 2 I/O Port Address high byte.
-----	----------------	-----	------------------------------------

### 6.3.3 I/O Port Select Register – index 61h

Power-on default [7:0] = 0xF8h when SOUT2/PS\_2F8\_IRQB is pull-up,  
0xE0h when DTR2#/PS\_2E0\_IRQB is pull-up, else 0x00h.

Bit	Name	R/W	Description
7:0	URB_BASE[7:0]	R/W	UART 2 I/O Port Address low byte.

### 6.3.4 IRQ Channel Select Register – index 70h

Power-on default [7:0] = 0x03h when SOUT2/PS\_2F8\_IRQB or DTR2#/PS\_2E0\_IRQB is pull-up,  
else 0x00h

Bit	Name	R/W	Description
7:6	Reserved	R/W	Return 0 when read.
5	URBIRQ_MODE	R/W	0 : PCI IRQ sharing mode. 1 : ISA IRQ sharing mode. This bit is effective in IRQ sharing mode.
4	URBIRQ_SHAR	R/W	0 : IRQ is not sharing with other device. 1 : IRQ is sharing with other device.
3:0	SELURAIRQ[3:0]	R/W	Select the Serial IRQ channel.

### 6.3.5 UART 2 Clock Select Register – index F0h

Power-on default [7:0] = 0x00h.

Bit	Name	R/W	Description
7:2	Reserved	R/W	Return 0 when read.
1:0	SELURACLK1 SELURACLK0	R/W	00 : UART 2 clock source is 1.8462MHz ( 24MHz/13 ) 01/10/11 selection reserved.

## 6.4 UART 3 Device Control Register (LDN 2)

# F81216

## 6.4.1 Device Enable Register – index 30h

Power-on default [7:0] = 0x01h when SOUT3/PS\_3E8\_IRQC is pull-up, else 0x00h.

Bit	Name	R/W	Description
7:1	Reserved	R/W	Return 0 when read.
0	URC_EN	R/W	0 : Disable UART 3. 1 : Enable UART 3.

## 6.4.2 I/O Port Select Register – index 60h

Power-on default [7:0] = 0x03h when SOUT3/PS\_3E8\_IRQC is pull-up, else 0x00h.

Bit	Name	R/W	Description
7:0	URC_BASE[15:8]	R/W	UART 3 I/O Port Address high byte.

## 6.4.3 I/O Port Select Register – index 61h

Power-on default [7:0] = E8h when SOUT3/PS\_3E8\_IRQC is pull-up, else 0x00h.

Bit	Name	R/W	Description
7:0	URC_BASE[7:0]	R/W	UART 3 I/O Port Address low byte.

## 6.4.4 IRQ Channel Select Register – index 70h

Power-on default [7:0] = 0x05h when SOUT3/PS\_3E8\_IRQC is pull-up, else 0x00h.

Bit	Name	R/W	Description
7:6	Reserved	R/W	Return 0 when read.
5	URCIRQ_MODE	R/W	0 : PCI IRQ sharing mode. 1 : ISA IRQ sharing mode. This bit is effective in IRQ sharing mode.
4	URCIRQ_SHAR	R/W	0 : IRQ is not sharing with other device. 1 : IRQ is sharing with other device.
3:0	SELURCIRQ[3:0]	R/W	Select the Serial IRQ channel.

# F81216

## 6.4.5 UART 3 Clock Select Register – index F0h

Power-on default [7:0] = 0000\_0000b.

Bit	Name	R/W	Description
7:2	Reserved	R/W	Return 0 when read.
1:0	SELURCCLK1 SELURCCLK0	R/W	00 : UART 3 clock source is 1.8462MHz ( 24MHz/13 ) 01/10/11 selection reserved.

## 6.5 UART 4 Device Control Register (LDN 3)

### 6.5.1 Device Enable Register – index 30h

Power-on default [7:0] = 0x01h when SOUT4/PS\_2E8\_IRQD is pull-up, else 0x00h.

Bit	Name	R/W	Description
7:1	Reserved	R/W	Return 0 when read.
0	URD_EN	R/W	0 : Disable UART 4. 1 : Enable UART 4.

### 6.5.2 I/O Port Select Register – index 60h

Power-on default [7:0] = 0x02h when SOUT4/PS\_2E8\_IRQD is pull-up, else 0x00h.

Bit	Name	R/W	Description
7:0	URD_BASE[15:8]	R/W	UART 4 I/O Port Address high byte.

### 6.5.3 I/O Port Select Register – index 61h

Power-on default [7:0] = 0xE8h when SOUT4/PS\_2E8\_IRQD is pull-up, else 0x00h.

Bit	Name	R/W	Description
7:0	URD_BASE[7:0]	R/W	UART 4 I/O Port Address low byte.

# F81216

## 6.5.4 IRQ Channel Select Register – index 70h

Power-on default [7:0] = 0x09h when SOUT4/PS\_2E8\_IRQD is pull-up, else 0x00h.

Bit	Name	R/W	Description
7:6	Reserved	R/W	Return 0 when read.
5	URDIRQ_MODE	R/W	0 : PCI IRQ sharing mode 1 : ISA IRQ sharing mode. This bit is effective in IRQ sharing mode.
4	URDIRQ_SHAR	R/W	0 : IRQ is not sharing with other device. 1 : IRQ is sharing with other device.
3:0	SELURDIRQ[3:0]	R/W	Select the Serial IRQ channel.

## 6.5.5 UART 4 Clock Select Register – index F0h

Power-on default [7:0] = 0x00h.

Bit	Name	R/W	Description
7:2	Reserved	R/W	Return 0 when read.
1:0	SELURDCLK1 SELURDCLK0	R/W	00 : UART 4 clock source is 1.8462MHz ( 24MHz/13 ) 01/10/11 selection reserved.

## 6.6 Watch Dog Timer Device Control Register (LDN 8)

### 6.6.1 Device Enable Register – index 30h

Power-on default [7:0] = 0x01h when DTR3#/PS\_WDT is pull-up, else 0x00h.

Bit	Name	R/W	Description
7:1	Reserved	R/W	Return 0 when read.
0	WDT_EN	R/W	0 : Disable Watchdog Timer. 1 : Enable Watchdog Timer.

### 6.6.2 I/O Port Select Register – index 60h

Power-on default [7:0] = 0x04h when DTR3#/PS\_WDT is pull-up, else 0x00h.

Bit	Name	R/W	Description
7:0	WDT_BASE[15:8]	R/W	I/O Base high byte.

# F81216

## 6.6.3 I/O Port Select Register – index 61h

Power-on default [7:0] = 0x42h when DTR3#/PS\_WDT is pull-up, else 0x00h.

Bit	Name	R/W	Description
7:0	WDT_BASE[7:0]	R/W	I/O Base low byte.

## 6.6.4 IRQ Channel Select Register – index 70h

Power-on default [7:0] = 0x00h.

Bit	Name	R/W	Description
7:5	Reserved	R/W	Return 0 when read.
4	WDTIRQ_EN	R/W	0 : Time out is asserted only via WDT_OUT#. 1 : Time out is asserted via IRQ and WDT_OUT#.
3:0	SELWDTIRQ[3:0]	R/W	In LPC mode , select the Serial IRQ channel. In ISA mode , select one of six IRQ pins . 03h : use serial IRQ channel 3 in LPC mode or use ISA_IRQA in ISA mode. 04h : use serial IRQ channel 4 in LPC mode or use ISA_IRQB in ISA mode. 05h : use serial IRQ channel 5 in LPC mode or use ISA_IRQC in ISA mode. 09h : use serial IRQ channel 9 in LPC mode or use ISA_IRQD in ISA mode. 0Ah : use serial IRQ channel 10 in LPC mode or use ISA_IRQE in ISA mode. 0Bh : use serial IRQ channel 11 in LPC mode or use ISA_IRQF in ISA mode. Otherwise will disable the interrupt.

## 6.6.5 Timer Status and Control Register – index F0h

Power-on default [7:0] = 0x02h when DTR3#/PS\_WDT is pull-up , else 0x00h.

Bit	Name	R/W	Description
7:3	Reserved	R/W	Return 0 when read.
2:1	WDT_UNIT[1:0]	R/W	00 : Timer Unit is 10ms. 01 : Timer Unit is 1 second

## F81216

			10 : Timer Unit is 1 minute. 11 : reserved.
0	WDT_EVENT	R/W	When read 0 : no time out occur. 1 : time out has occurred. when write 0 : no action 1 : clear the time out status.

### 6.6.6 Timer Count Number Register – index F1h

Power-on default [7:0] = 0x0Ah when DTR3#/PS\_WDT is pull-up, else 0x00h.

Bit	Name	R/W	Description
7:0	WDT_CNT[7:0]	R/W	The number of count for watchdog timer. Write the same value twice to enable the timer, otherwise will disable timer.



# F81216

## 7. Electron Characteristic

### 7.1 Absolute Maximum Ratings

PARAMETER	RATING	UNIT
Power Supply Voltage	-0.5 to 4.0	V
Input Voltage	-0.5 to 5.5	V
Operating Temperature	0 to +70	° C
Storage Temperature	-55 to +150	° C

Note: Exposure to conditions beyond those listed under Absolute Maximum Ratings may adversely affect the life and reliability of the device.

### 7.2 DC Characteristics

((Ta = 0° C to 70° C, VDD = 3.3V ± 10%, VSS = 0V)

PARAMETER	SYM.	MIN.	TYP.	MAX.	UNIT	CONDITIONS
<b>I/O<sub>12t</sub> - TTL level bi-directional pin with source-sink capability of 12 mA</b>						
Input Low Voltage	VIL			0.8	V	
Input High Voltage	VIH	2.0			V	
Output Low Current	IOL	10	12		mA	VOL = 0.4V
Output High Current	IOH		-12	-10	mA	VOH = 2.4V
Input High Leakage	ILIH			+10	μA	VIN = VDD
Input Low Leakage	ILIL			-10	μA	VIN = 0V
<b>I/O<sub>12ts</sub> - TTL level bi-directional pin with source-sink capability of 12 mA and schmitt-trigger level input</b>						
Input Low Threshold Voltage	Vt-	0.5	0.8	1.1	V	VDD = 3.3 V
Input High Threshold Voltage	Vt+	1.6	2.0	2.4	V	VDD = 3.3 V
Output Low Current	IOL	10	12		mA	VOL = 0.4 V
Output High Current	IOH		-12	-10	mA	VOH = 2.4V
Input High Leakage	ILIH			+10	μA	VIN = VDD
Input Low Leakage	ILIL			-10	μA	VIN = 0V

# F81216

## 7.2 DC Characteristics, continued

PARAMETER	SYM.	MIN.	TYP.	MAX.	UNIT	CONDITIONS
<b>OUT<sub>12t</sub> - TTL level output pin with source-sink capability of 12 mA</b>						
Output Low Current	IOL	12	16		mA	VOL = 0.4V
Output High Current	IOH		-14	-12	mA	VOH = 2.4V
<b>OD<sub>8</sub> - Open-drain output pin with sink capability of 8 mA</b>						
Output Low Current	IOL	6	8		mA	VOL = 0.4V
<b>OD<sub>16</sub> - Open-drain output pin with sink capability of 16 mA</b>						
Output Low Current	IOL	12	16		mA	VOL = 0.4V
<b>I/OOD<sub>16ts</sub> - TTL level bi-directional pin, can select to OD or OUT by register, with 16 mA source-sink capability</b>						
Input Low Threshold Voltage	Vt-	0.5	0.8	1.1	V	VDD = 3.3 V
Input High Threshold Voltage	Vt+	1.6	2.0	2.4	V	VDD = 3.3 V
Output Low Current	IOL	6	8		mA	VOL = 0.4 V
Output High Current	IOH		-16	-12	mA	VOH = 2.4V
Input High Leakage	ILIH			+10	μA	VIN = VDD
Input Low Leakage	ILIL			-10	μA	VIN = 0V
<b>IN<sub>t</sub> - TTL level input pin</b>						
Input Low Voltage	VIL			0.8	V	
Input High Voltage	VIH	2.0			V	
Input High Leakage	ILIH			+10	μA	VIN = VDD
Input Low Leakage	ILIL			-10	μA	VIN = 0 V
<b>IN<sub>ts</sub> - TTL level Schmitt-triggered input pin</b>						
Input Low Threshold Voltage	Vt-	0.5	0.8	1.1	V	VDD = 3.3V
Input High Threshold Voltage	Vt+	1.6	2.0	2.4	V	VDD = 3.3V
Input High Leakage	ILIH			+10	μA	VIN = VDD
Input Low Leakage	ILIL			-10	μA	VIN = 0 V


## 8. Ordering Information

Part Number	Package Type	Production Flow
F81216D	48 pin LQFP (Normal)	Commercial, 0°C to +70°C
F81216DG	48 pin LQFP (Green Package)	Commercial, 0°C to +70°C

# F81216

## 9. Package Dimensions

### 48pin-LQFP

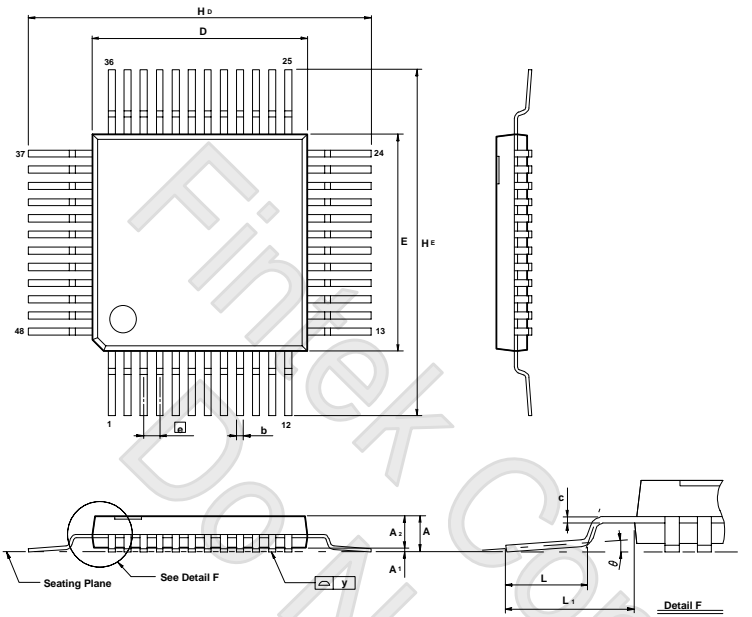

Symbol	Dimension in inch			Dimension in mm		
	Min.	Nom.	Max.	Min.	Nom.	Max.
<b>A</b>				---	---	1.60
<b>A<sub>1</sub></b>				0.05	---	0.15
<b>A<sub>2</sub></b>				1.35	1.40	1.45
<b>b</b>				0.17	0.20	0.27
<b>c</b>				0.09	---	0.20
<b>D</b>					7.00	
<b>E</b>					7.00	
<b>⌀</b>					0.50	
<b>H<sub>D</sub></b>					9.00	
<b>H<sub>E</sub></b>					9.00	
<b>L</b>				0.45	0.60	0.75
<b>L<sub>1</sub></b>					1.00	
<b>y</b>				---	0.08	---
<b>θ</b>				0	3.5°	7

**Notes:**

1. Dimensions D & E do not include interlead flash.
2. Dimension b does not include dambar protrusion/intrusion.
3. Controlling dimension: Millimeters
4. General appearance spec. should be based on final visual inspection spec.


**Feature Integration Technology Inc.**
**Headquarters**

3F-7, No 36, Tai Yuan St.,  
 Chupei City, Hsinchu, Taiwan 302, R.O.C.

TEL : 886-3-5600168

FAX : 886-3-5600166

www: <http://www.fintek.com.tw>

**Taipei Office**


Bldg. K4, 7F, No.700, Chung Cheng Rd.,  
 Chungo City, Taipei, Taiwan 235, R.O.C.

TEL : 866-2-8227-8027


FAX : 866-2-8227-8037

*Please note that all datasheet and specifications are subject to change without notice. All the trade marks of products and companies mentioned in this datasheet belong to their respective owner*

# 10. Application Circuit





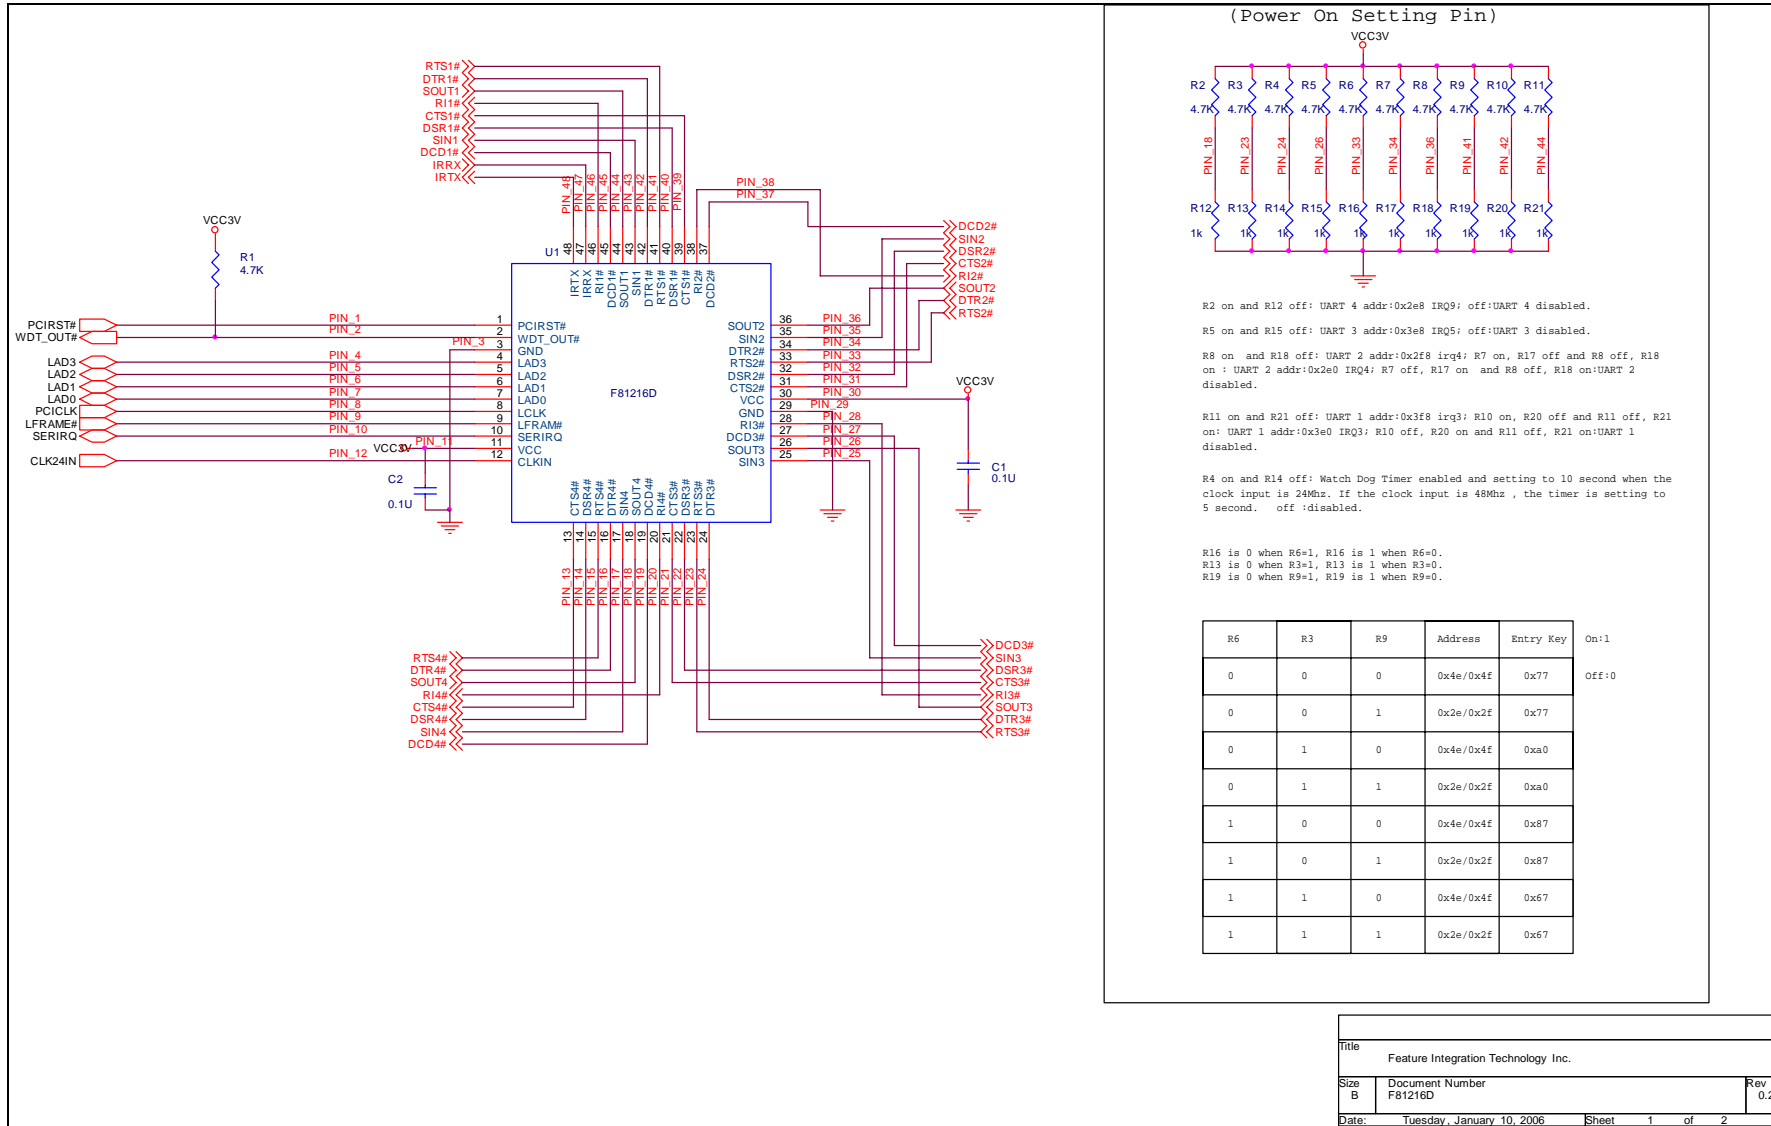


(Power On Setting Pin)

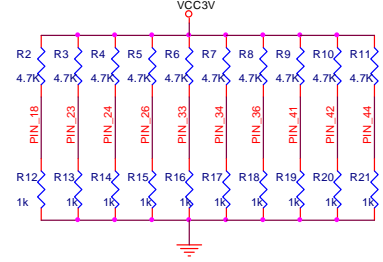

R2 on and R12 off: UART 4 addr:0x2e8 IRQ9; off:UART 4 disabled.  
 R5 on and R15 off: UART 3 addr:0x3e8 IRQ5; off:UART 3 disabled.  
 R8 on and R18 off: UART 2 addr:0x2f8 irq4; R7 on, R17 off and R8 off, R18 on : UART 2 addr:0x2e0 IRQ4; R7 off, R17 on and R8 off, R18 on:UART 2 disabled.  
 R11 on and R21 off: UART 1 addr:0x3f8 irq3; R10 on, R20 off and R11 off, R21 on: UART 1 addr:0x3e0 IRQ3; R10 off, R20 on and R11 off, R21 on:UART 1 disabled.  
 R4 on and R14 off: Watch Dog Timer enabled and setting to 10 second when the clock input is 24Mhz. If the clock input is 48Mhz , the timer is setting to 5 second. off :disabled.  
 R16 is 0 when R6=1, R16 is 1 when R6=0.  
 R13 is 0 when R3=1, R13 is 1 when R3=0.  
 R19 is 0 when R9=1, R19 is 1 when R9=0.

R6	R3	R9	Address	Entry Key	On:1	Off:0
0	0	0	0x4e/0x4f	0x77		
0	0	1	0x2e/0x2f	0x77		
0	1	0	0x4e/0x4f	0xa0		
0	1	1	0x2e/0x2f	0xa0		
1	0	0	0x4e/0x4f	0x87		
1	0	1	0x2e/0x2f	0x87		
1	1	0	0x4e/0x4f	0x67		
1	1	1	0x2e/0x2f	0x67		

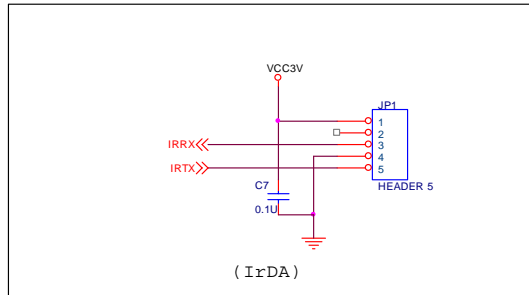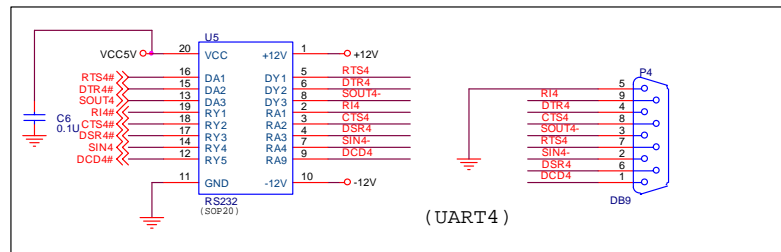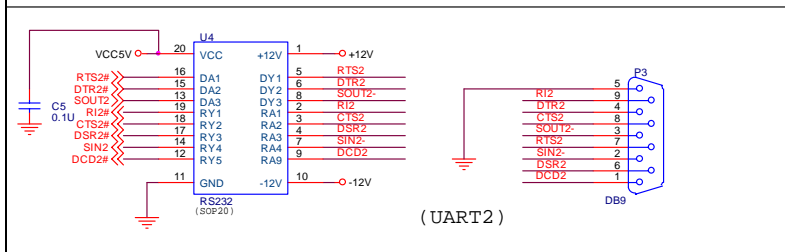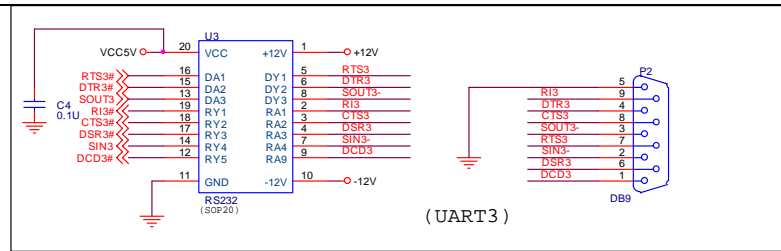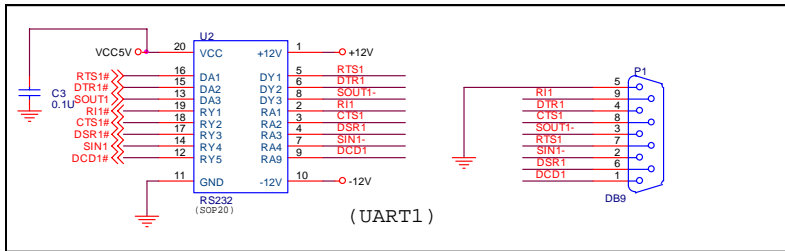

Title		
Feature Integration Technology, Inc.		
Size	Document Number	Rev
B	UART	0.2
Date:	Tuesday, January 10, 2006	Sheet 2 of 2