

## FFPF60SB60DS

### Features

- High Speed Switching,  $t_{rr} < 25\text{ns}$  @  $I_F = 4\text{A}$
- High Reverse Voltage and High Reliability
- RoHS compliant



### Applications

- General Purpose
- Switching Mode Power Supply
- Boost Diode in continuous mode power factor corrections
- Power switching circuits

### 4A, 600V STEALTH™ II Rectifier

The FFPF60SB60DS is STEALTH™ II rectifier with soft recovery characteristics. It is silicon nitride passivated ion-implanted epitaxial planar construction.

This device is intended for use as freewheeling of boost diode in switching power supplies and other power switching applications. Their low stored charge and hyperfast soft recovery minimize ringing and electrical noise in many power switching circuits reducing power loss in the switching transistors.



1. Cathode 2. Anode(Cathode) 3. Anode

### Absolute Maximum Ratings $T_C = 25^\circ\text{C}$ unless otherwise noted

| Symbol         | Parameter   | Ratings     | Units            |
|----------------|---|-------------|------------------|
| $V_{RRM}$      | Peak Repetitive Reverse Voltage                                 | 600         | V                |
| $V_{RWM}$      | Working Peak Reverse Voltage                                    | 600         | V                |
| $V_R$          | DC Blocking Voltage   | 600         | V                |
| $I_{F(AV)}$    | Average Rectified Forward Current @ $T_C = 100^\circ\text{C}$   | 4           | A                |
| $I_{FSM}$      | Non-repetitive Peak Surge Current<br>60Hz Single Half-Sine Wave | 40          | A                |
| $T_J, T_{STG}$ | Operating and Storage Temperature Range                         | -65 to +150 | $^\circ\text{C}$ |

### Thermal Characteristics

| Symbol          | Parameter                                    | Ratings | Units              |
|-----------------|--|---------|--------------------|
| $R_{\theta JC}$ | Maximum Thermal Resistance, Junction to Case | 8.7     | $^\circ\text{C/W}$ |

### Package Marking and Ordering Information

| Device Marking | Device         | Package | Reel Size | Tape Width | Quantity |
|----------------|----------------|---------|-----------|------------|----------|
| FFPF60SB60DS   | FFPF60SB60DSTU | TO220F  | -         | -          | 50       |



### Electrical Characteristics $T_C = 25^\circ\text{C}$ unless otherwise noted

| Symbol                                       | Parameter   | Min. | Typ.                   | Max.              | Units              |
|--|---|------|------------------------|-------------------|--------------------|
| $V_{FM1}$                                    | $I_F = 4\text{A}$<br>$I_F = 4\text{A}$                                      | -    | 2.2<br>1.7             | 2.6<br>-          | V                  |
| $I_{RM1}$                                    | $V_R = 600\text{V}$<br>$V_R = 600\text{V}$                                  | -    | -                      | 100<br>500        | $\mu\text{A}$      |
| $t_{rr}$                                     | $I_F = 1\text{A}$ , $di/dt = 100\text{A}/\mu\text{s}$ , $V_R = 30\text{V}$  | -    | 16                     | 23                | ns                 |
| $t_{rr}$<br>$I_{rr}$<br>S factor<br>$Q_{rr}$ | $I_F = 4\text{A}$ , $di/dt = 200\text{A}/\mu\text{s}$ , $V_R = 390\text{V}$ | -    | 18<br>2<br>0.7<br>18   | 25<br>-<br>-<br>- | ns<br>A<br>-<br>nC |
| $t_{rr}$<br>$I_{rr}$<br>S factor<br>$Q_{rr}$ | $I_F = 4\text{A}$ , $di/dt = 200\text{A}/\mu\text{s}$ , $V_R = 390\text{V}$ | -    | 45<br>2.8<br>1.8<br>64 | -<br>-<br>-<br>-  | ns<br>A<br>-<br>nC |
| $W_{AVL}$                                    | Avalanche Energy ( $L = 40\text{mH}$ )                                      | 5    | -                      | -                 | mJ                 |



**Notes:**

1: Pulse: Test Pulse width = 300 $\mu\text{s}$ , Duty Cycle = 2%

### Test Circuit and Waveforms

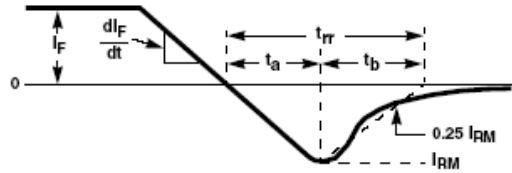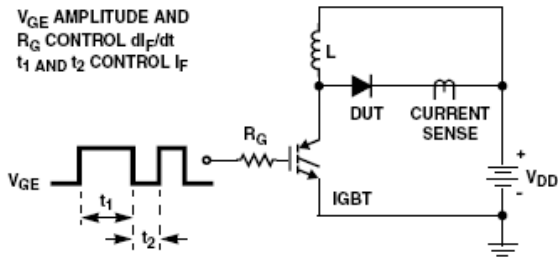

$L = 40\text{mH}$   
 $R < 0.1\Omega$   
 $V_{DD} = 50\text{V}$   
 $E_{AVL} = 1/2 L I^2 [V_{R(AVL)} / (V_{R(AVL)} - V_{DD})]$   
 $Q1 = \text{IGBT (} BV_{CES} > \text{DUT } V_{R(AVL)} \text{)}$

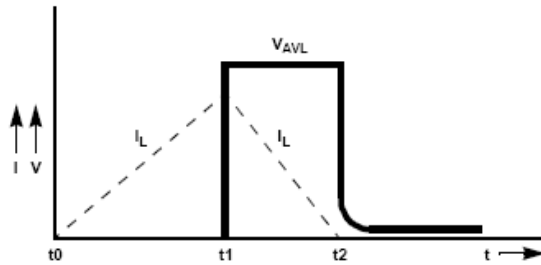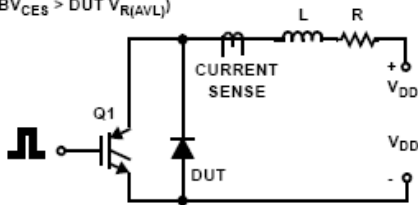

### Typical Performance Characteristics

Figure 1. Typical Forward Voltage Drop vs. Forward Current

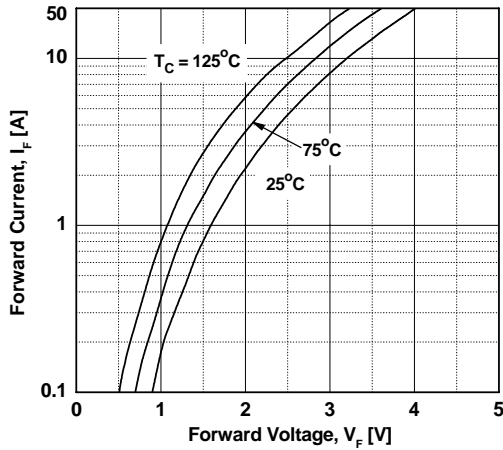


Figure 2. Typical Reverse Current vs. Reverse Voltage

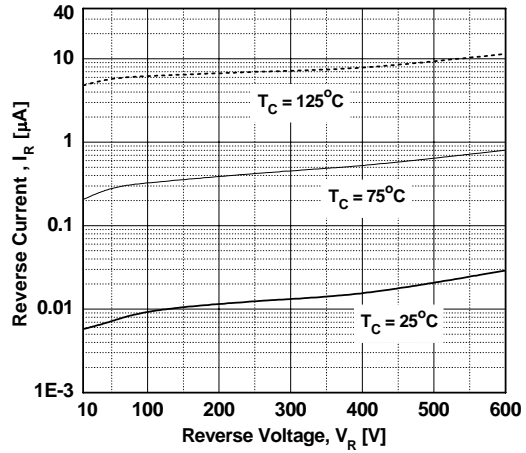


Figure 3. Typical Junction Capacitance

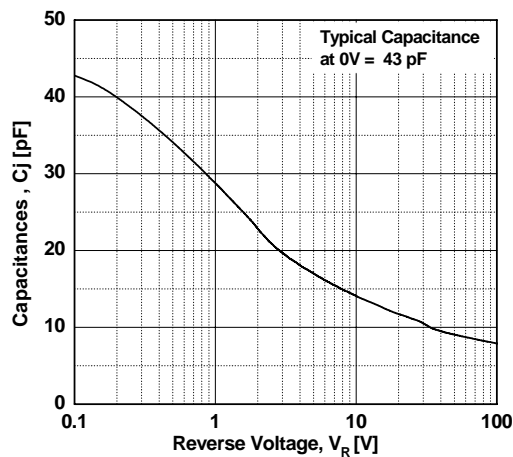


Figure 4. Typical Reverse Recovery Time vs. di/dt

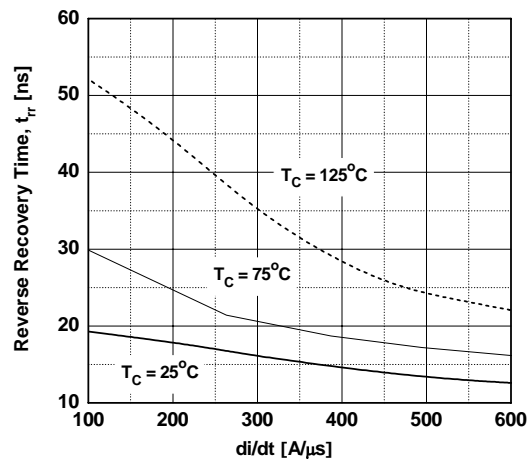


Figure 5. Typical Reverse Recovery Current vs. di/dt



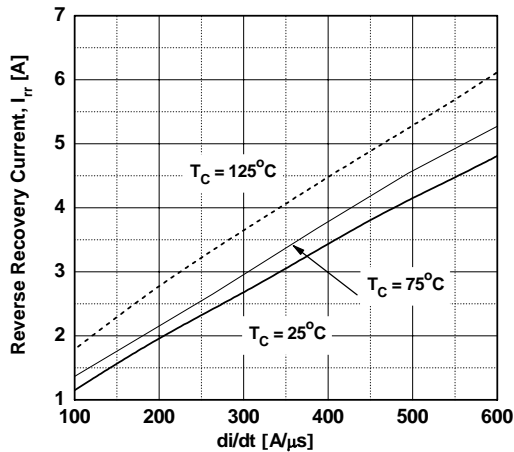


Figure 6. Forward Current Derating Curve

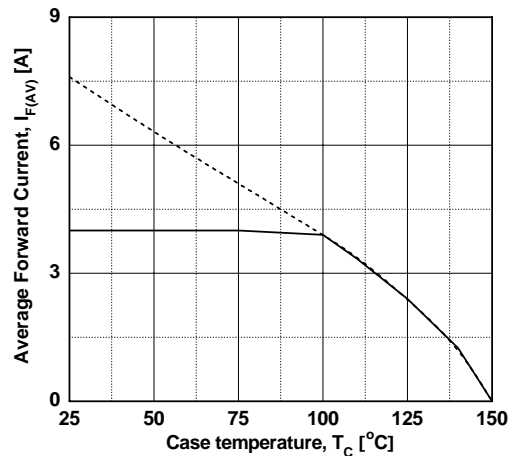

Mechanical Dimensions

TO220F

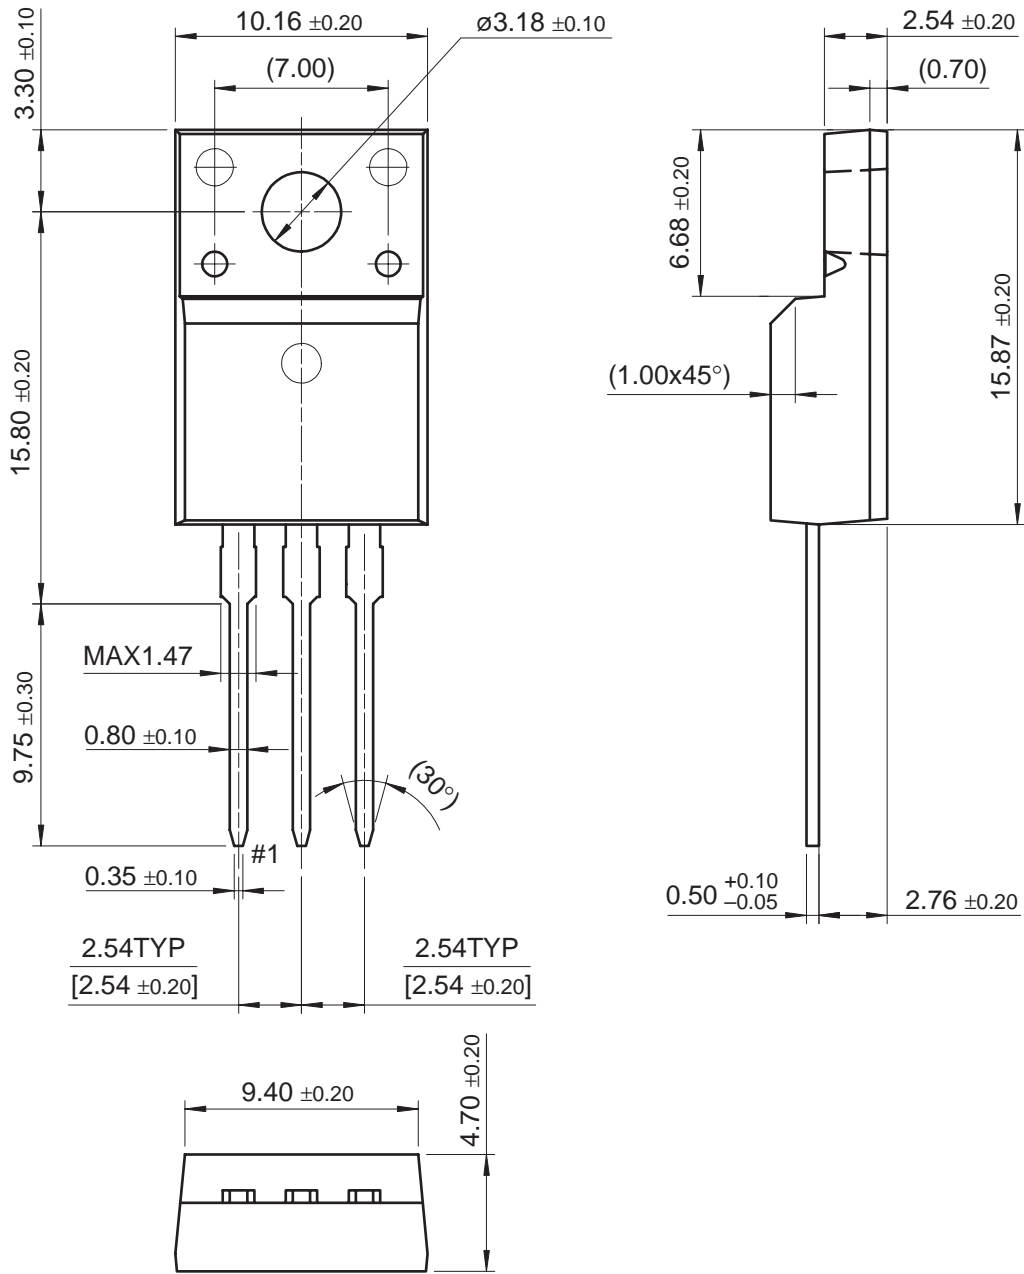






Dimensions in Millimeters



### TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

|  |  |  |   |
|--|--|--|---|
| ACEx <sup>®</sup>  | FPS <sup>™</sup>   | PDP-SPM <sup>™</sup>                   | SupreMOS <sup>™</sup>   |
| Build it Now <sup>™</sup>  | FRFET <sup>®</sup>   | Power220 <sup>®</sup>                  | SyncFET <sup>™</sup>  |
| CorePLUS <sup>™</sup>  | Global Power Resource <sup>SM</sup>  | POWEREDGE <sup>®</sup>                 |  SYSTEM GENFRAI <sup>®</sup> |
| CROSSVOLT <sup>™</sup>   | Green FPS <sup>™</sup>   | Power-SPM <sup>™</sup>                 | The Power Franchise <sup>®</sup>  |
| CTL <sup>™</sup>   | Green FPS <sup>™</sup> e-Series <sup>™</sup>   | PowerTrench <sup>®</sup>               |  the power franchise         |
| Current Transfer Logic <sup>™</sup>  | GTO <sup>™</sup>   | Programmable Active Droop <sup>™</sup> | TinyBoost <sup>™</sup>  |
| EcoSPARK <sup>®</sup>  | <i>i-Lo</i> <sup>™</sup>   | QFET <sup>®</sup>                      | TinyBuck <sup>™</sup>   |
| EZSWITCH <sup>™</sup> *  | IntelliMAX <sup>™</sup>  | QS <sup>™</sup>                        | TinyLogic <sup>®</sup>  |
|  <sup>™</sup> | ISOPLANAR <sup>™</sup>   | QT Optoelectronics <sup>™</sup>        | TINYOPTO <sup>™</sup>   |
|  <sup>®</sup> | MegaBuck <sup>™</sup>  | Quiet Series <sup>™</sup>              | TinyPower <sup>™</sup>  |
| Fairchild <sup>®</sup>   | MICROCOUPLER <sup>™</sup>  | RapidConfigure <sup>™</sup>            | TinyPWM <sup>™</sup>  |
| Fairchild Semiconductor <sup>®</sup>   | MicroFET <sup>™</sup>  | SMART START <sup>™</sup>               | TinyWire <sup>™</sup>   |
| FACT Quiet Series <sup>™</sup>   | MicroPak <sup>™</sup>  | SPM <sup>®</sup>                       | μSerDes <sup>™</sup>  |
| FACT <sup>®</sup>  | MillerDrive <sup>™</sup>   | STEALTH <sup>™</sup>                   | UHC <sup>®</sup>  |
| FAST <sup>®</sup>  | Motion-SPM <sup>™</sup>  | SuperFET <sup>™</sup>                  | Ultra FRFET <sup>™</sup>  |
| FastvCore <sup>™</sup>   | OPTOLOGIC <sup>®</sup>   | SuperSOT <sup>™</sup> -3               | UniFET <sup>™</sup>   |
| FlashWriter <sup>®</sup> *   | OPTOPLANAR <sup>®</sup>  | SuperSOT <sup>™</sup> -6               | VCX <sup>™</sup>  |
|  |  <sup>®</sup> | SuperSOT <sup>™</sup> -8               |   |

\* EZSWITCH<sup>™</sup> and FlashWriter<sup>®</sup> are trademarks of System General Corporation, used under license by Fairchild Semiconductor.

### DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
- A critical component in any component of a life support, device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

### PRODUCT STATUS DEFINITIONS

#### Definition of Terms

| Datasheet Identification | Product Status         | Definition   |
|--------------------------|------------------------|--|
| Advance Information      | Formative or In Design | This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.   |
| Preliminary              | First Production       | This datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design. |
| No Identification Needed | Full Production        | This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.   |
| Obsolete                 | Not In Production      | This datasheet contains specifications on a product that has been discontinued by Fairchild Semiconductor. The datasheet is printed for reference information only.                                      |

Rev. I33