

N-Channel 20-V (D-S) MOSFET

PRODUCT SUMMARY

V_{DS} (V)	$R_{DS(on)}$ (Ω)	I_D (A)
20	0.0055 at $V_{GS} = 10$ V	20
	0.009 at $V_{GS} = 4.5$ V	16

FEATURES

- Halogen-free available
- TrenchFET® Power MOSFET
- Q_g Optimized




RoHS
COMPLIANT

APPLICATIONS


- Synchronous Rectifier for DC/DC

PowerPAK® SO-8

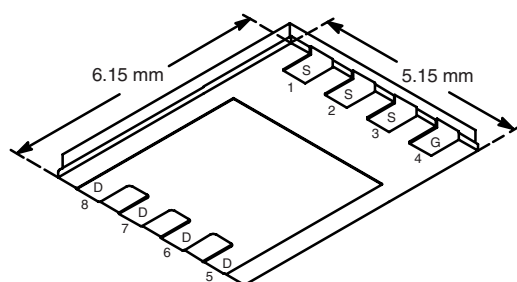

Bottom View

Ordering Information: Si7366DP-T1-E3 (Lead (Pb)-free)
Si7366DP-T1-GE3 (Lead (Pb)-free and Halogen-free)



N-Channel MOSFET

ABSOLUTE MAXIMUM RATINGS $T_A = 25$ °C, unless otherwise noted

ABSOLUTE MAXIMUM RATINGS $T_A = 25\text{ }^{\circ}\text{C}$, unless otherwise noted					
Parameter		Symbol	10 s	Steady State	Unit
Drain-Source Voltage		V_{DS}	20		V
Gate-Source Voltage		V_{GS}	± 20		
Continuous Drain Current ($T_J = 150\text{ }^{\circ}\text{C}$) ^a	$T_A = 25\text{ }^{\circ}\text{C}$	I_D	20	13	A
	$T_A = 70\text{ }^{\circ}\text{C}$		17	10	
Pulsed Drain Current (10 μs Pulse Width)		I_{DM}	50		
Continuous Source Current (Diode Conduction) ^a		I_S	4.1	1.4	
Maximum Power Dissipation ^a	$T_A = 25\text{ }^{\circ}\text{C}$	P_D	5	1.7	W
	$T_A = 70\text{ }^{\circ}\text{C}$		3.2	1.1	
Operating Junction and Storage Temperature Range		T_J, T_{stg}	- 55 to 150		$^{\circ}\text{C}$
Soldering Recommendations (Peak Temperature) ^{b,c}			260		

THERMAL RESISTANCE RATINGS

Parameter	Symbol	Typical	Maximum	Unit
Maximum Junction-to-Ambient ^a	R_{thJA}	20	25	°C/W
		53	70	
Maximum Junction-to-Case (Drain)	R_{thJC}	3.4	4.5	

Notes:

- Surface Mounted on 1" x 1" FR4 board.
- See Solder Profile (<http://www.vishay.com/ppg?73257>). The PowerPAK SO-8 is a leadless package. The end of the lead terminal is exposed copper (not plated) as a result of the singulation process in manufacturing. A solder fillet at the exposed copper tip cannot be guaranteed and is not required to ensure adequate bottom side solder interconnection.
- Rework Conditions: manual soldering with a soldering iron is not recommended for leadless components. .

SPECIFICATIONS $T_J = 25^\circ\text{C}$, unless otherwise noted						
Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Static						
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}$, $I_D = 250\ \mu\text{A}$	1.0		3.0	V
Gate-Body Leakage	I_{GSS}	$V_{DS} = 0\ \text{V}$, $V_{GS} = \pm 20\ \text{V}$			± 100	nA
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = 20\ \text{V}$, $V_{GS} = 0\ \text{V}$			1	μA
		$V_{DS} = 20\ \text{V}$, $V_{GS} = 0\ \text{V}$, $T_J = 55^\circ\text{C}$			5	
On-State Drain Current ^a	$I_{D(on)}$	$V_{DS} \geq 5\ \text{V}$, $V_{GS} = 10\ \text{V}$	30			A
Drain-Source On-State Resistance ^a	$R_{DS(on)}$	$V_{GS} = 10\ \text{V}$, $I_D = 20\ \text{A}$		0.0045	0.0055	Ω
		$V_{GS} = 4.5\ \text{V}$, $I_D = 16\ \text{A}$		0.0072	0.009	
Forward Transconductance ^a	g_{fs}	$V_{DS} = 6\ \text{V}$, $I_D = 20\ \text{A}$		48		S
Diode Forward Voltage ^a	V_{SD}	$I_S = 4.5\ \text{A}$, $V_{GS} = 0\ \text{V}$		0.76	1.1	V
Dynamic^b						
Total Gate Charge	Q_g	$V_{DS} = 10\ \text{V}$, $V_{GS} = 4.5\ \text{V}$, $I_D = 20\ \text{A}$		16	25	nC
Gate-Source Charge	Q_{gs}			6		
Gate-Drain Charge	Q_{gd}			5.2		
Gate Resistance	R_g			1.8		Ω
Turn-On Delay Time	$t_{d(on)}$	$V_{DD} = 10\ \text{V}$, $R_L = 10\ \Omega$ $I_D \cong 1\ \text{A}$, $V_{GEN} = 10\ \text{V}$, $R_G = 6\ \Omega$		21	32	ns
Rise Time	t_r			16	25	
Turn-Off Delay Time	$t_{d(off)}$			58	90	
Fall Time	t_f			15	23	
Source-Drain Reverse Recovery Time	t_{rr}	$I_F = 4.1\ \text{A}$, $di/dt = 100\ \text{A}/\mu\text{s}$		40	80	



Notes:

a. Pulse test; pulse width $\leq 300\ \mu\text{s}$, duty cycle $\leq 2\%$.


b. Guaranteed by design, not subject to production testing.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.


TYPICAL CHARACTERISTICS 25°C , unless otherwise noted

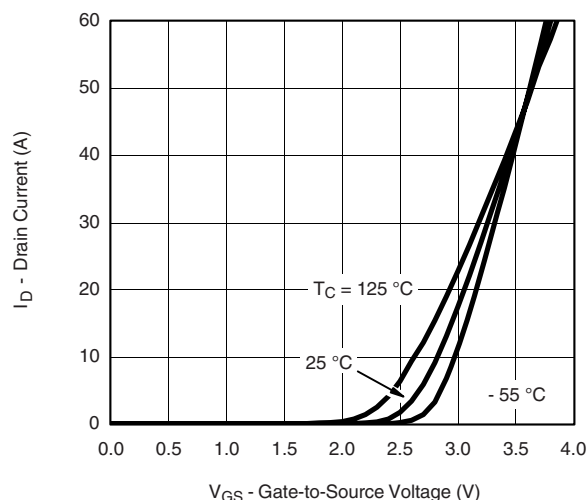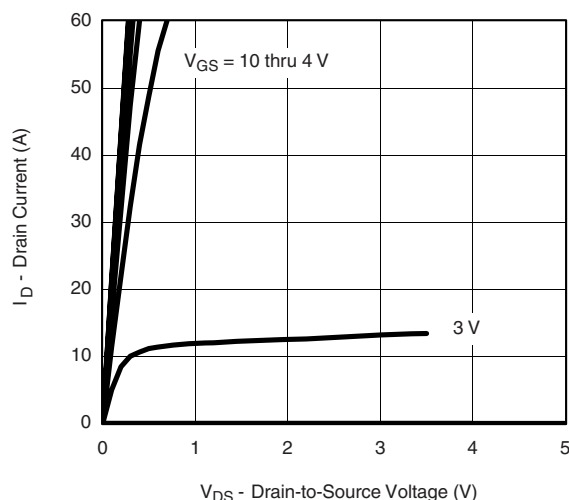


TYPICAL CHARACTERISTICS 25 °C, unless otherwise noted

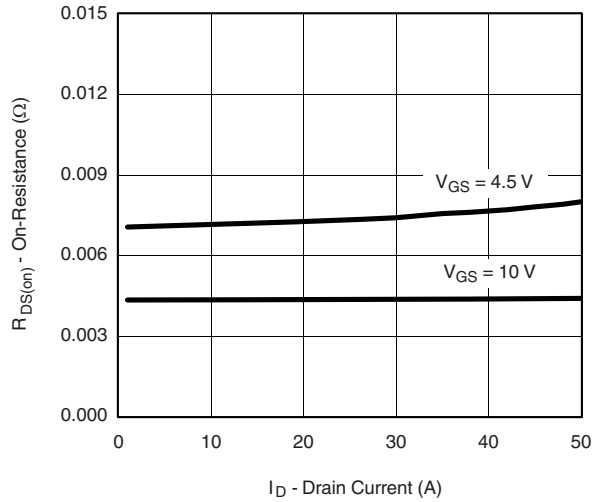


On-Resistance vs. Drain Current

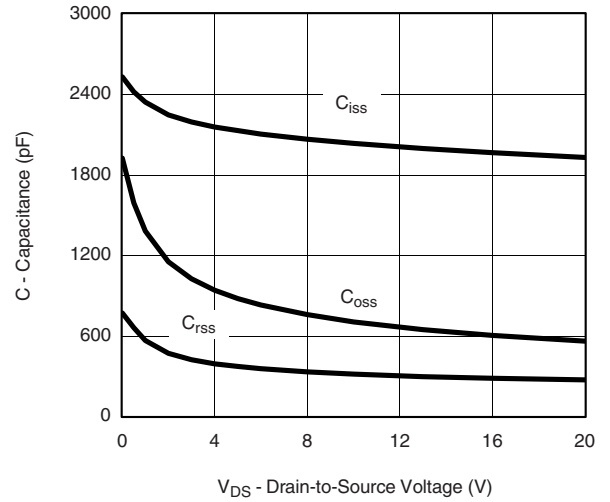


Capacitance

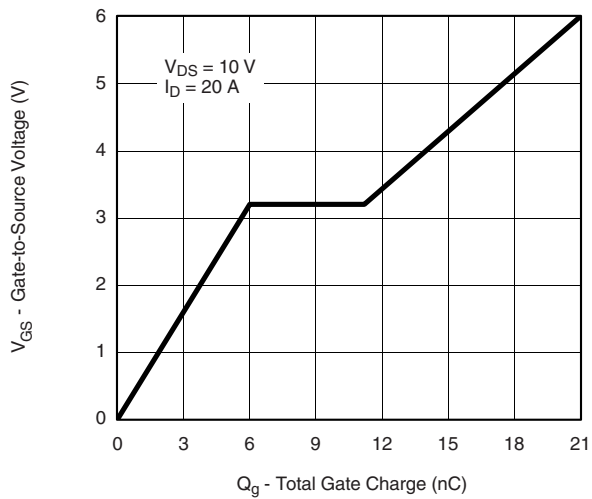


Gate Charge

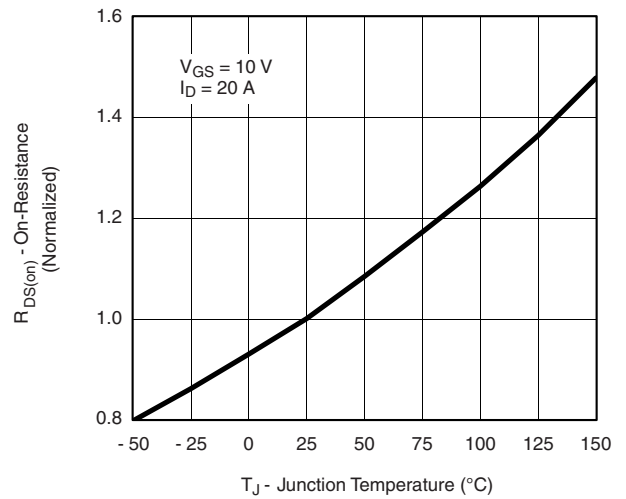




On-Resistance vs. Junction Temperature

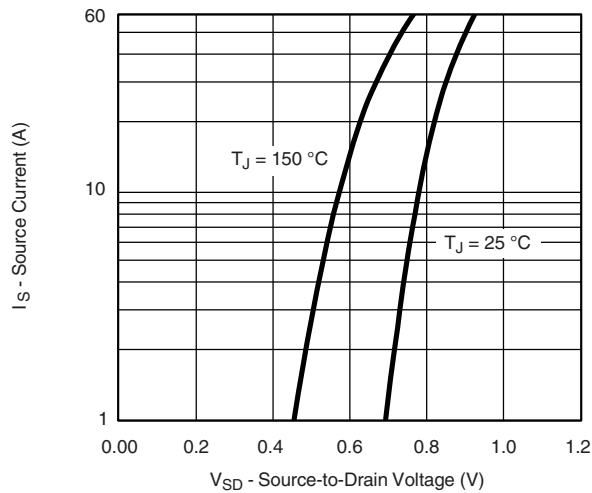


Source-Drain Diode Forward Voltage

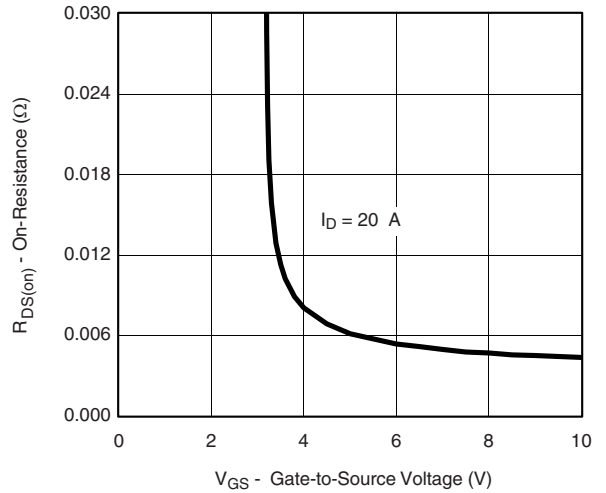


On-Resistance vs. Gate-to-Source Voltage

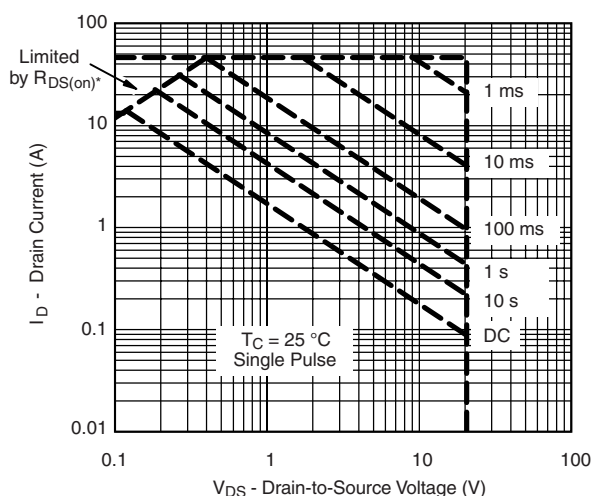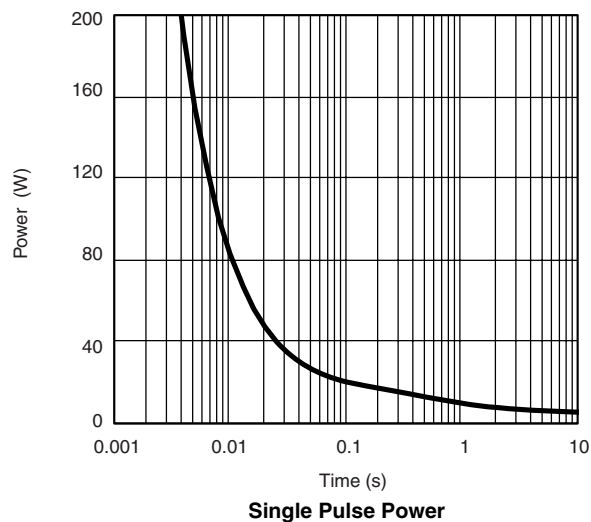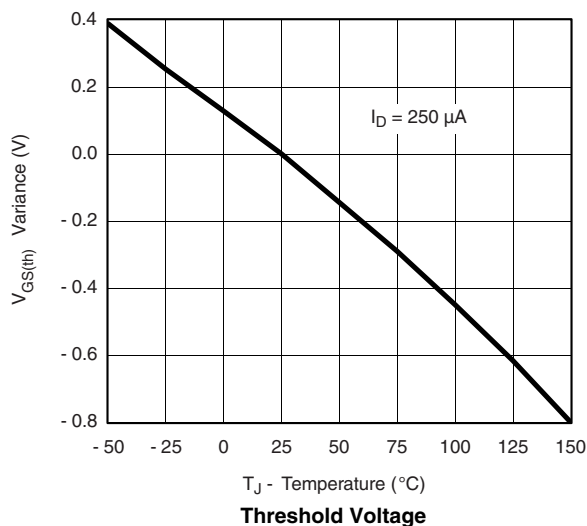TYPICAL CHARACTERISTICS 25 °C, unless otherwise noted

* $V_{GS} >$ minimum V_{GS} at which $R_{DS(on)}$ is specified

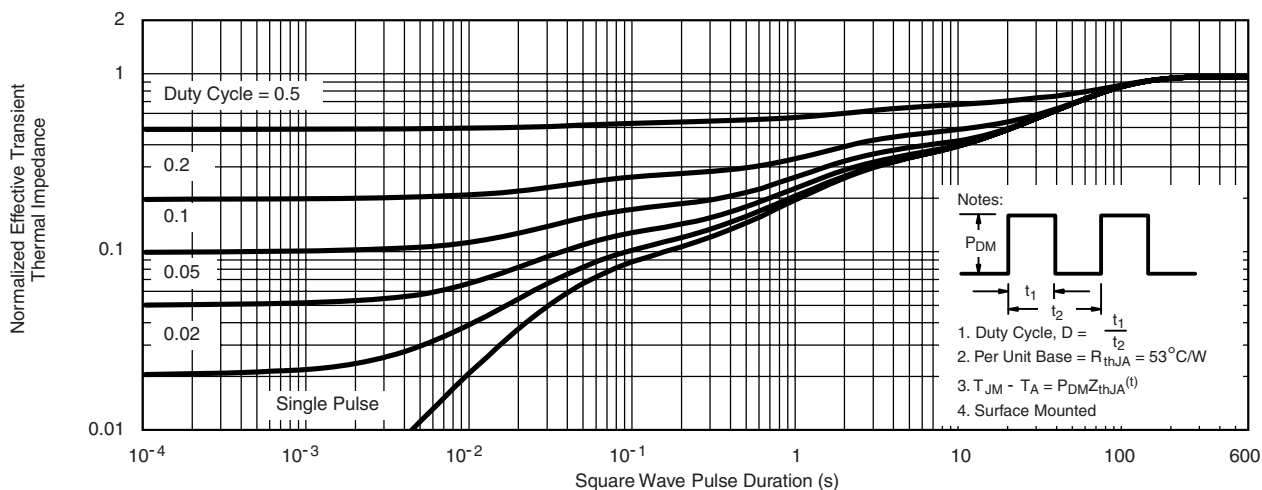Safe Operating Area, Junction-to-Case**Normalized Thermal Transient Impedance, Junction-to-Ambient**

TYPICAL CHARACTERISTICS 25 °C, unless otherwise noted

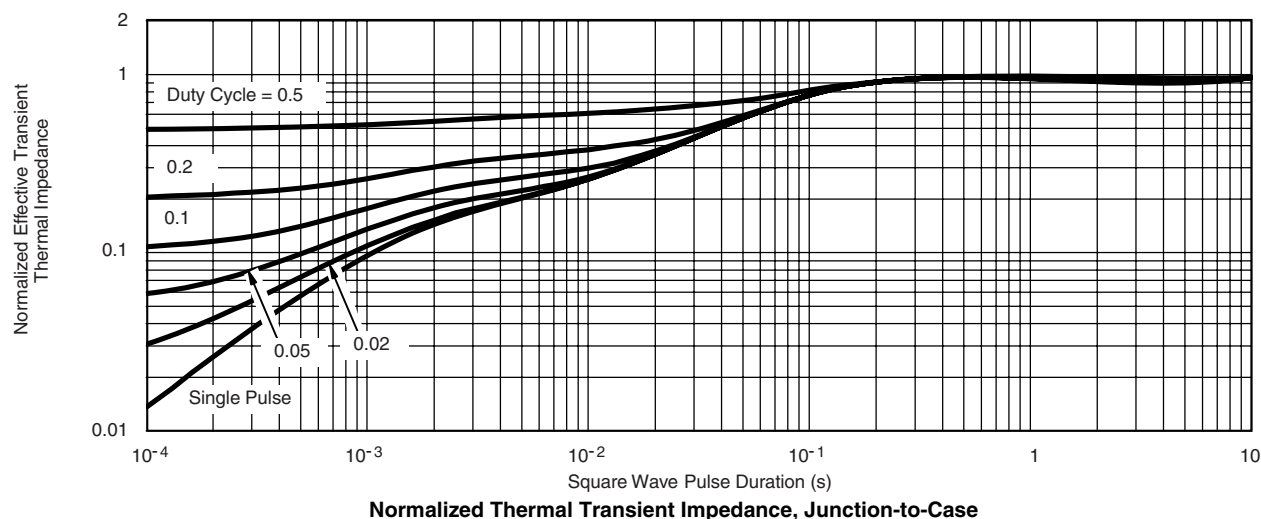

Vishay Siliconix maintains worldwide manufacturing capability. Products may be manufactured at one of several qualified locations. Reliability data for Silicon Technology and Package Reliability represent a composite of all qualified locations. For related documents such as package/tape drawings, part marking, and reliability data, see <http://www.vishay.com/ppg?72296>.



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.