

Silicon NPN Power Transistors

2SD1941

DESCRIPTION

- With TO-3PML package
- High voltage ,high speed
- Low collector saturation voltage

APPLICATIONS

- Color TV horizontal output applications

PINNING

| PIN | DESCRIPTION |
|-----|-------------|
| 1 | Base |
| 2 | Collector |
| 3 | Emitter |

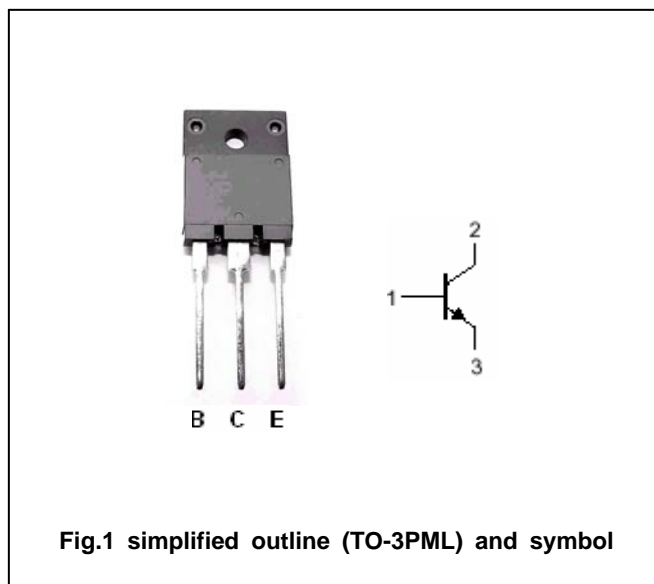


Fig.1 simplified outline (TO-3PML) and symbol

Absolute maximum ratings (T_a=25°C)

| SYMBOL | PARAMETER | CONDITIONS | VALUE | UNIT |
|------------------|-----------------------------|----------------------|---------|------|
| V _{CBO} | Collector-base voltage | Open emitter | 1500 | V |
| V _{CEO} | Collector-emitter voltage | Open base | 600 | V |
| V _{EBO} | Emitter-base voltage | Open collector | 5 | V |
| I _C | Collector current | | 6 | A |
| I _B | Base current | | 3 | A |
| P _C | Collector power dissipation | T _C =25°C | 50 | W |
| T _j | Junction temperature | | 150 | °C |
| T _{stg} | Storage temperature | | -55~150 | °C |

Silicon NPN Power Transistors

2SD1941

CHARACTERISTICS

T_j=25°C unless otherwise specified

| SYMBOL | PARAMETER | CONDITIONS | MIN | TYP. | MAX | UNIT |
|-----------------------|--------------------------------------|--|-----|------|-----|------|
| V _{CEO(SUS)} | Collector-emitter sustaining voltage | I _C =0.1A , I _B =0 | 600 | | | V |
| V _{CEsat} | Collector-emitter saturation voltage | I _C =5A ; I _B =1A | | 3.0 | 5.0 | V |
| V _{BEsat} | Base-emitter saturation voltage | I _C =5A ; I _B =1A | | | 1.5 | V |
| I _{CBO} | Collector cut-off current | V _{CB} =800V; I _E =0 | | | 10 | μ A |
| I _{EBO} | Emitter cut-off current | V _{EB} =5V; I _C =0 | | | 1 | mA |
| h _{FE-1} | DC current gain | I _C =1A ; V _{CE} =5V | 8 | | 36 | |
| h _{FE-2} | DC current gain | I _C =5A ; V _{CE} =5V | 5 | | | |

Silicon NPN Power Transistors

2SD1941

PACKAGE OUTLINE

