

Topstek Current Transducers TP25A .. TP300A


TP 25A~300A

Features

- ◆ Highly reliable Hall Effect device
- ◆ Compact and light weight. Three sensors in one package
- ◆ Fast response time
- ◆ Excellent linearity of the output voltage over a wide input range
- ◆ Excellent frequency response (> 50 kHz)
- ◆ Low power consumption (33 mA nominal)
- ◆ Capable of measuring both DC and AC, both pulsed and mixed
- ◆ High isolation voltage between the measuring circuit and the current-carrying conductor (AC2.5KV)
- ◆ Extended operating temperature range
- ◆ Flame-Retardant plastic case and silicone encapsulate, using UL classified materials, ensures protection against environmental contaminants and vibration over a wide temperature and humidity range

Applications

- ◆ UPS systems
- ◆ Industrial robots
- ◆ NC tooling machines
- ◆ Elevator controllers
- ◆ Process control devices
- ◆ AC and DC servo systems
- ◆ Motor speed controller
- ◆ Electrical vehicle controllers
- ◆ Inverter-controlled welding machines
- ◆ General and special purpose inverters
- ◆ Power supply for laser processing machines
- ◆ Controller for traction equipment e.g. electric trains
- ◆ Other automatic control systems

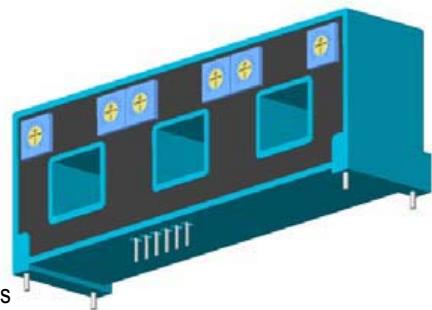

Specifications

Parameter	Symbol	Unit	TP 25A	TP 37.5A	TP 50A	TP 75A	TP 100A	TP 125A	TP 150A	TP 175A	TP 200A	TP 250A	TP 300A										
Nominal Input Current	I _{fn}	ADC	25	37.5	50	75	100	125	150	175	200	250	300										
Saturation Current	I _{fs}	ADC	±75	±112.5	±150	±225	±300	±375	±450	±525	±600	±600	±600										
Linear Range	I _{fs}	ADC	±75	±112.5	±150	±225	±300	±375	±450	±450	±450	±450	±450										
Nominal Output Voltage	V _{hn}	V	4 V±1% @ I _f =I _{fn} (R _L =10kΩ)																				
Offset Voltage	V _{os}	mV	Within ±35 mV @ I _f =0, T _a =25°C																				
Output Resistance	R _{OUT}	Ω	<100Ω(50Ωnominal)																				
Hysteresis Error	V _{oh}	mV	Within ±25 mV @ I _f =I _{fn} →0																				
Supply Voltage	V _{CC} /V _{EE}	V	±15V ±5%																				
Linearity	ρ	%	Within ±1% of I _{fn}																				
Consumption Current	I _{CC}	mA	±33 mA nominal, ±45 mA max																				
Response Time (90%V _{hn})	T _r	μsec	10 μsec max. @ d I _f / dt = I _{fn} / μsec																				
Response Performance	-	%	5% Overshoot max.																				
Frequency bandwidth (-3dB)	f _{BW}	Hz	DC to 50kHz																				
Thermal Drift of Output	-	%/°C	Within ±0.1 %/°C @ I _{fn}																				
Thermal Drift of Zero Current Offset	-	mV/°C	< ±3	< ±2	< ±1.5	< ±1 mV/°C																	
Dielectric Strength	-	V	AC2.5KV X 60 sec																				
Isolation Resistance @ 1000 VDC	R _{IS}	MΩ	>1000 MΩ																				
Operating Temperature	T _a	°C	-15°C to 80°C																				
Storage Temperature	T _s	°C	-20°C to 85°C																				
Mass	W	g	90 g																				

Topstek Current Transducers TP25A .. TP300A

Appearance, dimensions and pin identification

All dimensions in mm ± 0.2 , holes $-0, +0.2$ except otherwise noted.

