

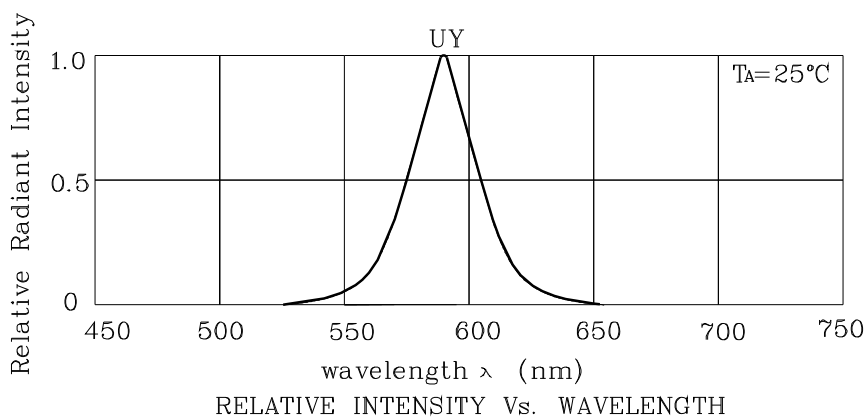
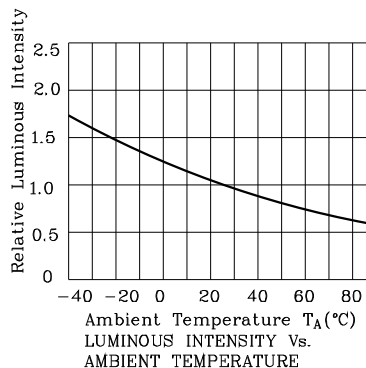







Part Number	Emitting Color	Emitting Material	Luminous Intensity (IF=10mA) ucd		Wavelength nm λ_P	Description
			min.	typ.		
AUY30A	Yellow	GaAsP/GaP	1200	4690	590	Common Anode, Rt. Hand Decimal



❖ UY




Note: the curves are on the segment c,d,g,h,k,m,n,s,r and t.

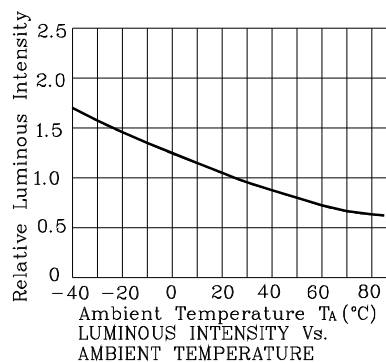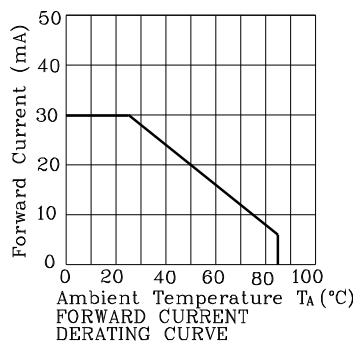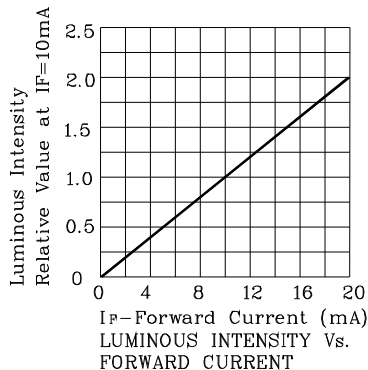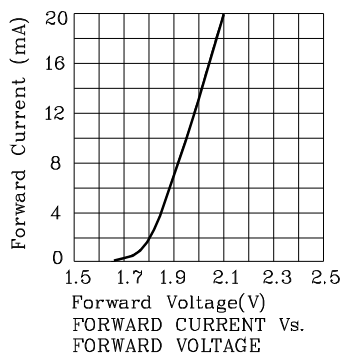

Note: the curves are on the segment a,b,e,f,p,u and DP.

Wave Soldering Profile For Lead-free Through-hole LED.

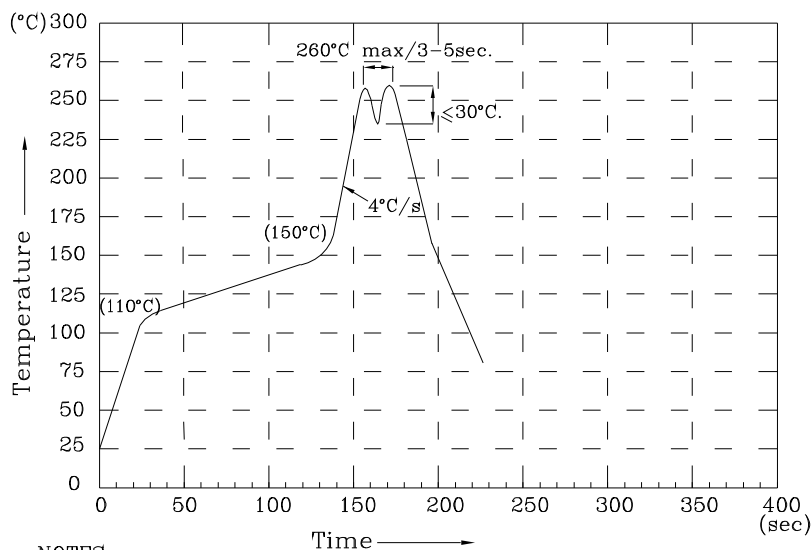

NOTES:

1. Recommend the wave temperature 245°C~260°C. The maximum soldering temperature should be less than 260°C.
2. Do not apply stress on epoxy resins when temperature is over 85 degree°C.
3. The soldering profile apply to the lead free soldering (Sn/Cu/Ag alloy).
4. No more than once.

Remarks:


If special sorting is required (e.g. binning based on forward voltage, luminous intensity / luminous flux or wavelength), the typical accuracy of the sorting process is as follows:

1. Wavelength: +/-1nm
2. Luminous Intensity / Luminous Flux: +/-15%
3. Forward Voltage: +/-0.1V

Note: Accuracy may depend on the sorting parameters.

PACKING & LABEL SPECIFICATIONS

AUY30A

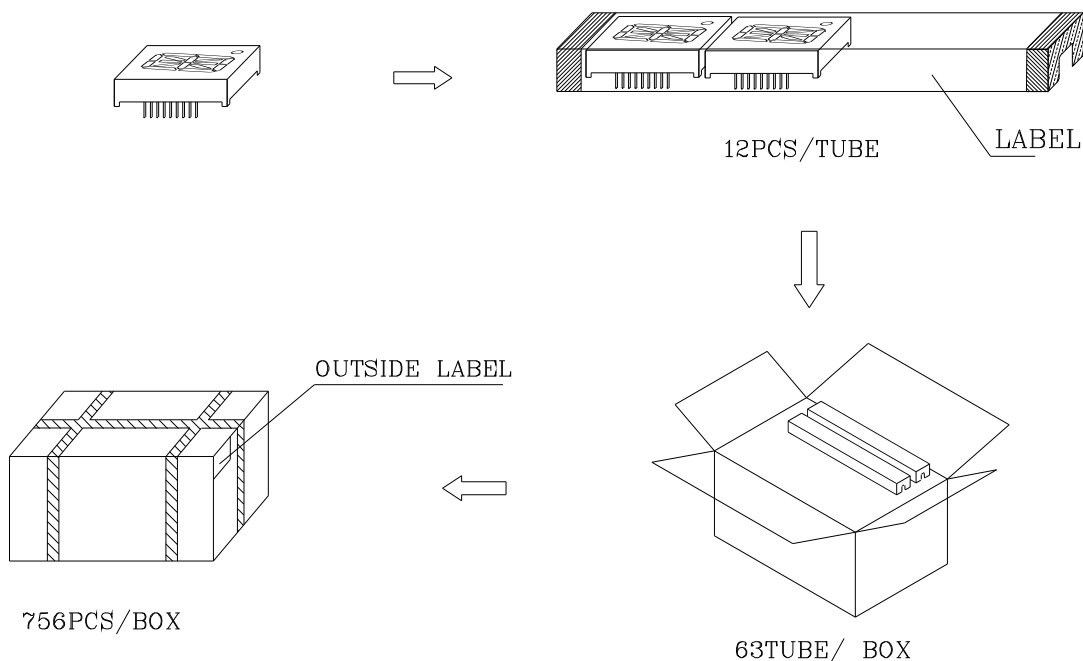

Inside LABEL Paste On The IC-tube

SunLED	PART NO: Axx30x	Q.C.
QTY: 12 PCS	CODE: xx	PASSED
XXXXXXXXXX-XXXX		xx xx xx
LOT NO.		FQCX
RoHS Compliant		Date
		Number OF FQC

Outside LABEL Paste On The Box

BOX Number	xxxx	xxxx	BIN CODE
Axx30x	756	xx	Number OF QA
QAxx xx xx xx PASSED			Date