

## L-band Phase Shifter

### GaAs Monolithic Microwave IC in surface mount ceramic-metal package

#### Description



The CHP6013 is a L-band monolithic 6-bit phase shifter.

The circuit is manufactured with a standard 0.7 $\mu$ m MESFET process : via holes through the substrate, air bridges and electron beam gate lithography. It is supplied in surface mount ceramic-metal package

#### Main Features

- Frequency range : 1.2 to 1.4GHz
- 5.625° phase step
- 64 states
- 0/-6V control voltage
- Surface mount package
- dimension: 11.43 x 8.89 x 1.9 mm<sup>3</sup>

#### Surface mount ceramic-metal package :

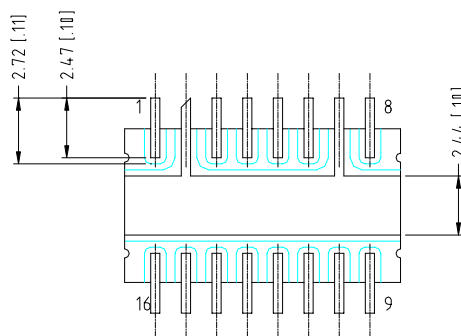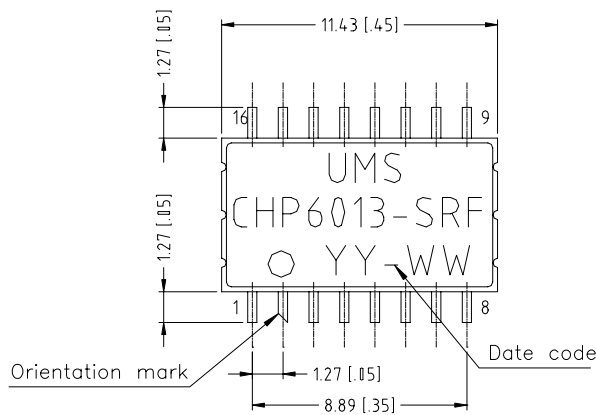

## Electrical Characteristics

- Tamb = +25°C
- Test conditions: Pin ≤ 0dBm, Low level control voltage = -6V, High level control voltage = 0V
- Specifications for the main bit states: 0, 1, 2, 4, 8, 16, 32 and 63

Symbol	Parameter	Min	Max	Unit
Fop	Operating frequency range	1.2	1.4	GHz
AV	Amplitude variation		± 1	dB
PPE	Peak Phase Error		± 5	°
IL	Insertion loss		8.5	dB
ILm	Insertion loss match at state 0 unit to unit (1)		± 0.25	dB
lpm	Insertion phase match at state 0 unit to unit (1)		± 7	°
VSWRin	Input VSWR		2:1	
VSWRout	Ouput VSWR		2.3:1	

(1) Average value defined by production lot.

ESD Protections : Electrostatic discharge sensitive device observe handling precautions !

### Peak Phase Error (PPE) definition:

$PPE(i) = \text{measured\_phase}(S_{21})@state(i) - \text{measured\_phase}(S_{21})@state(0) - \text{theoretical\_phase value}@state(i)$

(i) = 0, 1, 2, 4, 8, 16, 32, 63 = main bit states.

### Amplitude variation (AV) definition:

$AV(i) = \text{measured\_dB}(S_{21})@state(i) - \text{measured\_dB}(S_{21})@state(0)$

(i) = 0, 1, 2, 4, 8, 16, 32, 63 = main bit states.

## Absolute Maximum Ratings

Tamb = +25°C

Operation of this device above anyone of these paramaters may cause permanent damage.

Symbol	Parameter	Values	Unit
Vgi	Phase shifter control voltage	-7.5	V
Pin	Maximum peak input power overdrive (1)	+30	dBm
Top	Operating temperature range	-40 to +85	°C
Tstg	Storage temperature range	-55 to +125	°C


(1) Duration < 1s.

## Phase Shifter Control Interface

The 6-bit phase shifter command is actuated by 12 voltage control leads.

BIT STATE	Theoretical phase state (°)	Control voltages (V)											
		B18	B90	B45	B22	B11	B5	H18	H90	H45	H22	H11	H5
0	0	0	0	0	0	0	0	-6	-6	-6	-6	-6	-6
1	5,625	0	0	0	0	0	-6	-6	-6	-6	-6	-6	0
2	11,25	0	0	0	0	-6	0	-6	-6	-6	-6	0	-6
3	16,875	0	0	0	0	-6	-6	-6	-6	-6	-6	0	0
4	22,5	0	0	0	-6	0	0	-6	-6	-6	0	-6	-6
5	28,125	0	0	0	-6	0	-6	-6	-6	-6	0	-6	0
6	33,75	0	0	0	-6	-6	0	-6	-6	-6	0	0	-6
7	39,375	0	0	0	-6	-6	-6	-6	-6	-6	0	0	0
8	45	0	0	-6	0	0	0	-6	-6	0	-6	-6	-6
9	50,625	0	0	-6	0	0	-6	-6	-6	0	-6	-6	0
10	56,25	0	0	-6	0	-6	0	-6	-6	0	-6	0	-6
11	61,875	0	0	-6	0	-6	-6	-6	-6	0	-6	0	0
12	67,5	0	0	-6	-6	0	0	-6	-6	0	0	-6	-6
13	73,125	0	0	-6	-6	0	-6	-6	-6	0	0	-6	0
14	78,75	0	0	-6	-6	-6	0	-6	-6	0	0	0	-6
15	84,375	0	0	-6	-6	-6	-6	-6	-6	0	0	0	0
16	90	0	-6	0	0	0	0	-6	0	-6	-6	-6	-6
17	95,625	0	-6	0	0	0	-6	-6	0	-6	-6	-6	0
18	101,25	0	-6	0	0	-6	0	-6	0	-6	-6	0	-6
19	106,875	0	-6	0	0	-6	-6	-6	0	-6	-6	0	0
20	112,5	0	-6	0	-6	0	0	-6	0	-6	0	-6	-6
21	118,125	0	-6	0	-6	0	-6	-6	0	-6	0	-6	0
22	123,75	0	-6	0	-6	-6	0	-6	0	-6	0	0	-6
23	129,375	0	-6	0	-6	-6	-6	-6	0	-6	0	0	0
24	135	0	-6	-6	0	0	0	-6	0	0	-6	-6	-6
25	140,625	0	-6	-6	0	0	-6	-6	0	0	-6	-6	0
26	146,25	0	-6	-6	0	-6	0	-6	0	0	-6	0	-6
27	151,875	0	-6	-6	0	-6	-6	-6	0	0	-6	0	0
28	157,5	0	-6	-6	-6	0	0	-6	0	0	0	-6	-6
30	168,75	0	-6	-6	-6	-6	0	-6	0	0	0	0	-6
31	174,375	0	-6	-6	-6	-6	-6	-6	0	0	0	0	0
32	180	-6	0	0	0	0	0	0	-6	-6	-6	-6	-6
33	185,625	-6	0	0	0	0	-6	0	-6	-6	-6	-6	0
34	191,25	-6	0	0	0	-6	0	0	-6	-6	-6	0	-6
35	196,875	-6	0	0	0	-6	-6	0	-6	-6	-6	0	0
36	202,5	-6	0	0	-6	0	0	0	-6	-6	0	-6	-6
37	208,125	-6	0	0	-6	0	-6	0	-6	-6	0	-6	0
38	213,75	-6	0	0	-6	-6	0	0	-6	-6	0	0	-6
39	219,375	-6	0	0	-6	-6	-6	0	-6	-6	0	0	0
40	225	-6	0	-6	0	0	0	0	-6	0	-6	-6	-6
41	230,625	-6	0	-6	0	0	-6	0	-6	0	-6	-6	0
42	236,25	-6	0	-6	0	-6	0	0	-6	0	-6	0	-6
43	241,875	-6	0	-6	0	-6	-6	0	-6	0	-6	0	0
44	247,5	-6	0	-6	-6	0	0	0	-6	0	0	-6	-6
45	253,125	-6	0	-6	-6	0	-6	0	-6	0	0	-6	0
46	258,75	-6	0	-6	-6	-6	0	0	-6	0	0	0	-6
47	264,375	-6	0	-6	-6	-6	-6	0	-6	0	0	0	0
48	270	-6	-6	0	0	0	0	0	0	-6	-6	-6	-6
49	275,625	-6	-6	0	0	0	-6	0	0	-6	-6	-6	0
50	281,25	-6	-6	0	0	-6	0	0	0	-6	-6	0	-6
51	286,875	-6	-6	0	0	-6	-6	0	0	-6	-6	0	0
52	292,5	-6	-6	0	-6	0	0	0	0	-6	0	-6	-6
53	298,125	-6	-6	0	-6	0	-6	0	0	-6	0	-6	0
54	303,75	-6	-6	0	-6	-6	0	0	0	-6	0	0	-6
55	309,375	-6	-6	0	-6	-6	-6	0	0	-6	0	0	0
56	315	-6	-6	-6	0	0	0	0	0	0	-6	-6	-6
57	320,625	-6	-6	-6	0	0	-6	0	0	0	-6	-6	0
58	326,25	-6	-6	-6	0	-6	0	0	0	0	-6	0	-6
59	331,875	-6	-6	-6	0	-6	-6	0	0	0	-6	0	0
60	337,5	-6	-6	-6	-6	0	0	0	0	0	0	-6	-6
61	343,125	-6	-6	-6	-6	0	-6	0	0	0	0	-6	0
62	348,75	-6	-6	-6	-6	-6	0	0	0	0	0	0	-6
63	354,375	-6	-6	-6	-6	-6	-6	0	0	0	0	0	0



## Package information

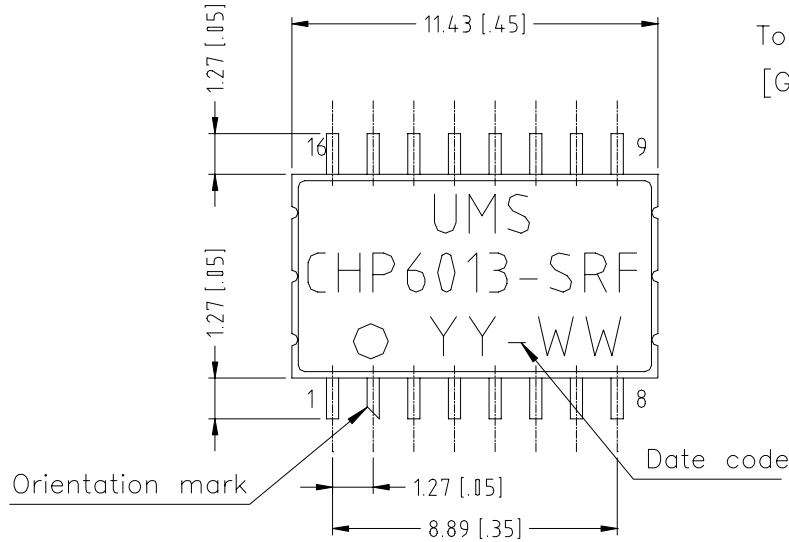

Unit: mm[in]

Tolerance generale:  $\pm 0.13$

[General tolerance:  $\pm 0.05$ ]

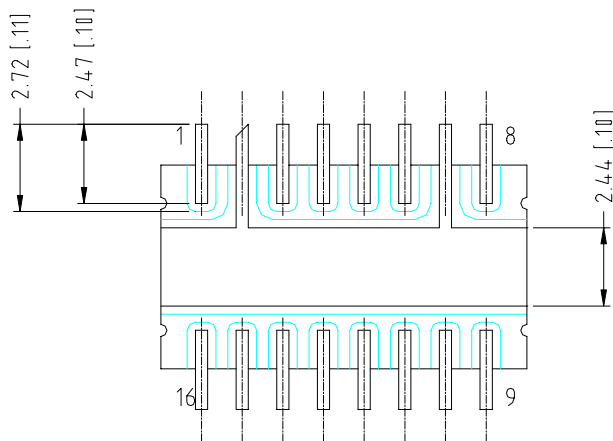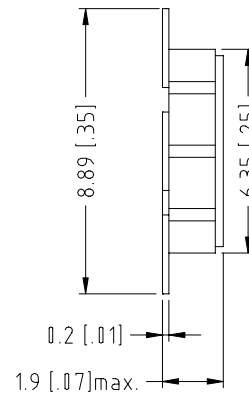

Pin	Function	Pin	Function
1	RF in	9	H11
2	Gnd	10	B11
3	H22	11	H180
4	B22	12	B180
5	B5	13	B45
6	H5	14	H45
7	Gnd	15	H90
8	RF out	16	B90

## Ordering Information

Package form : CHP6013-SRF/23

Information furnished is believed to be accurate and reliable. However, **United Monolithic Semiconductors S.A.S.** assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties, which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of **United Monolithic Semiconductors S.A.S.**. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. **United Monolithic Semiconductors S.A.S.** products are not authorised for use as critical components in life support devices or systems without express written approval from **United Monolithic Semiconductors S.A.S.**