

# Low Pass Filter for Cable Modem Applications

## EPB5055G




- Integrated LPF designed to work with Broadcom BCM 3033,3137 and 3210
- Robust construction allows for IR/VP processes
- Temperature Range -40°C to +85°C

### Electrical Parameters @ 25° C

Cut-off Frequency	Insertion Loss (dB Max.)	Return Loss (dB Min.)		Attenuation (dB Min.)			Group Delay (nS Max.)
		1 MHz - 60 MHz	65 MHz	75 MHz	100 MHz	300-500 MHz	
± 3.0 MHz	1 MHz - 60 MHz	1 MHz - 60 MHz	65 MHz	75 MHz	100 MHz	300-500 MHz	1Mhz-60 MHz
68	-1.5	-15	-10	-10	-30	-20	35


• Characteristic Filter Impedance : 75 Ω •

### Schematic

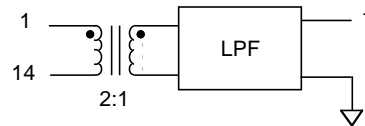

2, 3, 4, 5, 6, 8, 9, 10, 11, 12 & 13

### Package

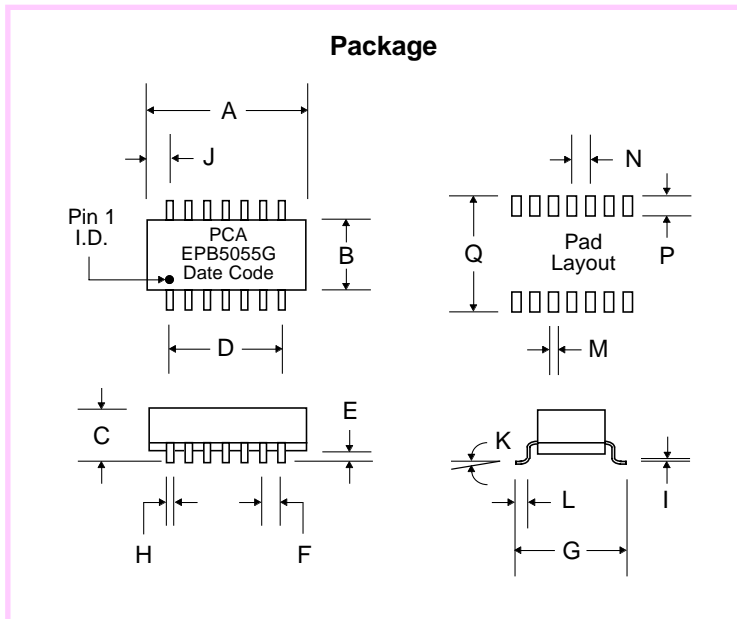

### Dimensions

Dim.	(Inches)			(Millimeters)		
	Min.	Max.	Nom.	Min.	Max.	Nom.
A	.740	.760	.750	18.79	19.3	19.05
B	.260	.280	.270	6.60	7.11	6.86
C	.190	.210	.200	4.82	5.33	5.08
D	---	---	.600	---	---	15.24
E	.010	.020	.015	.254	.508	.381
F	---	---	.100	---	---	2.54
G	.390	.410	.400	9.91	10.41	10.16
H	.016	.020	.018	.406	.508	.457
I	.008	.012	.010	.203	.304	.254
J	.070	.080	.075	1.78	2.03	1.91
K	0°	8°	---	0°	8°	---
L	.030	.050	.040	.762	1.27	1.02
M	---	---	.030	---	---	.762
N	---	---	.100	---	---	2.54
P	---	---	.085	---	---	2.16
Q	---	---	.450	---	---	11.43