

January 16, 1998

TEL:805-498-2111 FAX:805-498-3804 WEB:http://www.semtech.com

### SUPERFAST RECOVERY, LOW CURRENT 1-PHASE FULL WAVE BRIDGE RECTIFIER ASSEMBLIES

### QUICK REFERENCE DATA

- Very fast reverse recovery time
- Low forward voltage drop
- Low reverse leakage current
- Aluminum case
- Low thermal impedance


- $V_R = 50V - 150V$
- $I_F = 12A$
- $V_F = 0.97V$
- $t_{rr} = 30nS$

### ABSOLUTE MAXIMUM RATINGS

Device Type	Working Reverse Voltage $V_{RWM}$	Average Rectified Current $I_{F(AV)}$						1 Cycle Surge Current $I_{FSM}$ $t_p = 8.3mS$		Repetitive Surge Current $I_{FRM}$
		(@ case temperature)			(@ ambient temperature)			@ 25°C	@ 100°C	@ 25 °C
		@ 55°C	@ 100°C	@ 125°C	@ 25°C	@ 55°C	@ 100°C			
		Volts	Amps	Amps	Amps	Amps	Amps	Amps	Amps	Amps
SCBH05FF	50									
SCBH10FF	100	12	9	7.5	5	3.8	2	175	120	24
SCBH15FF	150									

$$R_{\theta JC} = 3.3^{\circ}C/W$$

### MECHANICAL

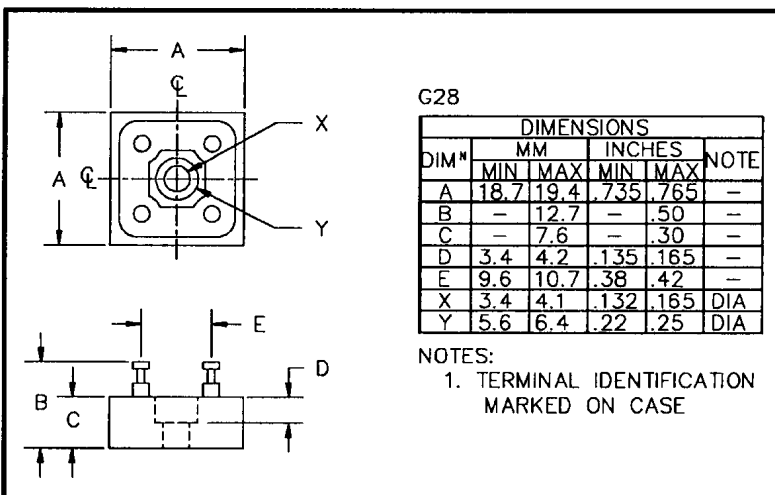

January 16, 1998

### ELECTRICAL CHARACTERISTICS

Device Type	Maximum Reverse Leakage Current $I_R @ V_{RWM}$		Maximum Forward Voltage $V_F @ 5A/leg$	Reverse Recovery Time <sup>1</sup> $t_{rr} @ 25^\circ C$	Maximum operating & storage temp. range. $T_{OP} T_{STG}$
	@ 25°C	@ 100°C			
	μA	mA	Volts	nS	°C
SCBH05FF SCBH10FF SCBH15FF	20	1.0	0.97	30	- 55 to +150

<sup>1</sup> Measured on discrete devices prior to assembly

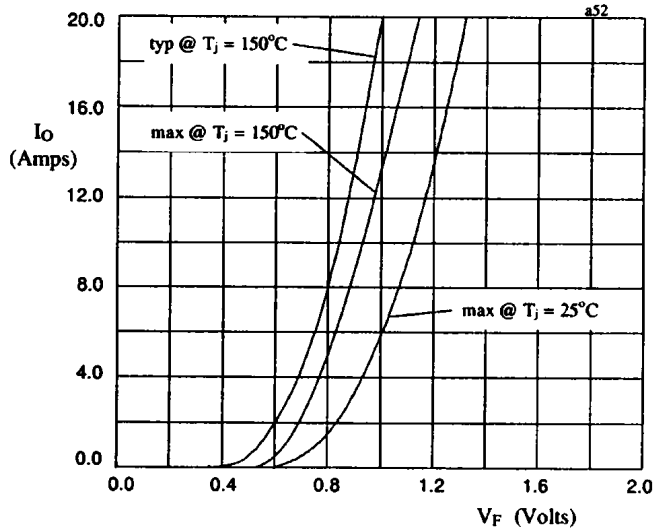


Fig 1. Forward voltage drop against output current per leg.

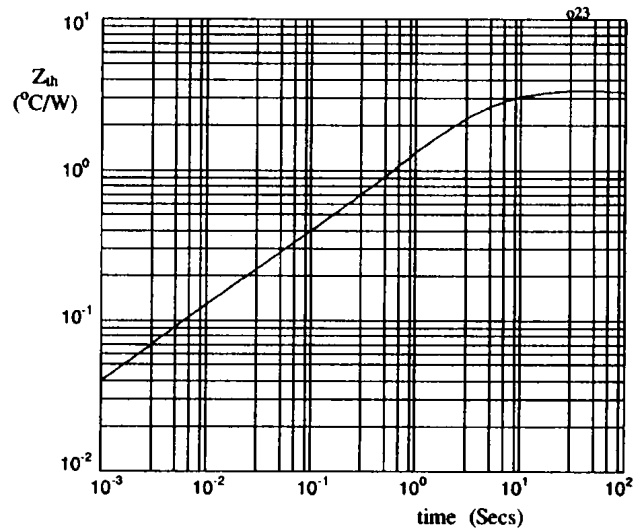


Fig 2. Transient thermal impedance characteristic per leg

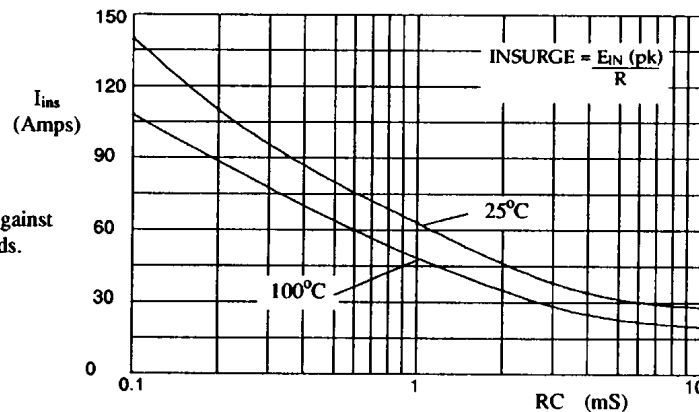


Fig 3. Maximum insurge current against time constant for capacitive loads.