

Bandsplitters 200 GHz Channel Spacing



Key Features

- Low insertion loss
- Flat and wide passband
- High isolation
- Low chromatic dispersion

JDSU ITU bandsplitters are the result of years of telecommunications experience in interference filter technology. Manufactured using laser welding technology, they conveniently split ITU channel spacings of 200, 100 and 50 GHz into manageable channel bands.

These highly reliable components demonstrate low loss, temperature insensitivity, and reliable performance in any system application. They are designed to exceed the requirements of Telcordia GR-1221.

Used within mux/demux and add/drop applications, JDSU bandsplitters manage multiple ITU channels. Narrow transitions from the passed band to the block band minimize lost channels while maintaining high spectral efficiency. Integrated with other available technologies, such as ITU channel filters, fiber Bragg gratings, and arrayed waveguides, JDSU bandsplitters offer complete dense wavelength division multiplexing (DWDM) solutions.

Established volume capability and proven experience in customizing fiber optic components and modules make JDSU the supplier of choice for these and other DWDM products.


Applications

- Long haul networks
- Metro networks
- Ring architectures
- Add/drop sites

Compliance


- Telcordia GR-1221

Add/Drop Module

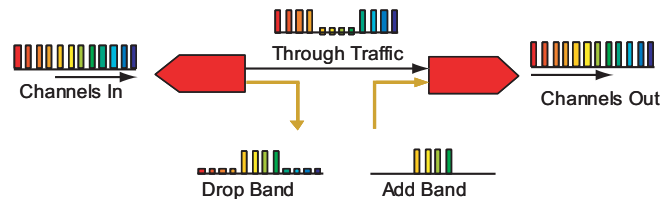

2

Mux/Demux Module

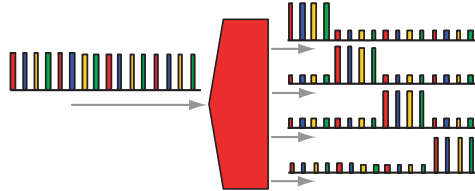

Specifications

Parameter		4 Skip 0	4 Skip 1	5 Skip 1	10 Skip 2
Passband width	Minimum	±335 GHz	±387.5 GHz	±487.5 GHz	±987.5 GHz
Passband ripple	Maximum	0.5 dB	0.25 dB	0.35 dB	0.2 dB
Insertion loss (transmission)	Maximum	1.0 dB	0.8 dB	1.0 dB	1.0 dB
Insertion loss (reflection)	Maximum	0.6 dB	0.4 dB	0.5 dB	0.6 dB
Isolation (adjacent band)	Minimum	20 dB	20 dB	37 dB	25 dB
Isolation (reflection)	Minimum	12 dB	15 dB	12 dB	15 dB
Directivity	Minimum	50 dB	50 dB	50 dB	50 dB
Return loss	Minimum	45 dB	45 dB	45 dB	45 dB
Polarization dependent loss	Maximum	0.15 dB	0.1 dB	0.15 dB	0.15 dB
Polarization mode dispersion	Maximum	0.15 ps	0.1 ps	0.2 ps	0.15 ps
Chromatic dispersion (Tx)	Maximum	±10 ps/nm	±5 ps/nm	±20 ps/nm	±3 ps/nm
Chromatic dispersion (Rx)	Maximum	±5 ps/nm	±5 ps/nm	±20 ps/nm	±2 ps/nm
Operating temperature		0 to 70 °C			
Storage temperature		-40 to 85 °C			
Fiber type		SMF-28 with 250 μm			
Fiber length		1.5±0.1 m			
Package dimensions (Ø x L)		5.5 x 35.4 mm			

Ordering Information

For more information on this or other products and their availability, please contact your local JDSU account manager or JDSU directly at 1-800-498-JDSU (5378) in North America and +800-5378-JDSU worldwide or via e-mail at customer.service@jdsu.com.

Sample: DWBW3F4S12370

DWBW

Code	Model
2	2 port device
3	3 port device

F

Code	Number of Channels Passed/Skipped
4S0	4 Skip 0
4S1	4 Skip 1
5S1	5 Skip 1
TS3	10 Skip 2

2

Code	Center Channel Frequency
Standard grids available. Please contact JDSU to determine what is available for the type of filter required.	

SMF-28 is a registered trademark of Corning Incorporated.
 Telcordia is a registered trademark of Telcordia Technologies Incorporated.

All statements, technical information and recommendations related to the products herein are based upon information believed to be reliable or accurate. However, the accuracy or completeness thereof is not guaranteed, and no responsibility is assumed for any inaccuracies. The user assumes all risks and liability whatsoever in connection with the use of a product or its application. JDSU reserves the right to change at any time without notice the design, specifications, function, fit or form of its products described herein, including withdrawal at any time of a product offered for sale herein. JDSU makes no representations that the products herein are free from any intellectual property claims of others. Please contact JDSU for more information. JDSU and the JDSU logo are trademarks of JDS Uniphase Corporation. Other trademarks are the property of their respective holders. ©2005 JDS Uniphase Corporation. All rights reserved. 10139340 Rev. 003 BANDSPLITTER200.DS.CC.AE