

**Silicon PNP Power Transistors**

**2SB861**

**DESCRIPTION**


- With TO-220C package
- Complement to type 2SD1138

**APPLICATIONS**

- Low frequency power amplifier color TV vertical deflection output

**PINNING**

PIN	DESCRIPTION
1	Emitter
2	Collector;connected to mounting base
3	Base

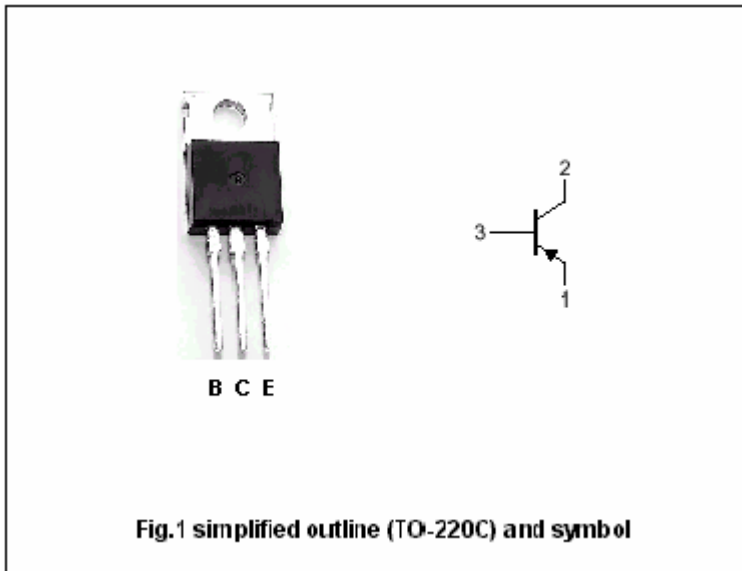

**Absolute maximum ratings(Ta=25°C)**

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V <sub>CBO</sub>	Collector-base voltage	Open emitter	-200	V
V <sub>CEO</sub>	Collector-emitter voltage	Open base	-150	V
V <sub>EBO</sub>	Emitter-base voltage	Open collector	-6	V
I <sub>C</sub>	Collector current		-2	A
I <sub>CP</sub>	Collector current-Peak		-5	A
P <sub>C</sub>	Collector power dissipation	T <sub>a</sub> =25°C	1.8	W
		T <sub>C</sub> =25°C	30	
T <sub>j</sub>	Junction temperature		150	°C
T <sub>stg</sub>	Storage temperature		-45~150	°C

## Silicon PNP Power Transistors

## 2SB861

## CHARACTERISTICS

T<sub>j</sub>=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V <sub>(BR)CEO</sub>	Collector-emitter breakdown voltage	I <sub>C</sub> =-50mA; R <sub>BE</sub> =∞	-150			V
V <sub>(BR)EBO</sub>	Emitter-base breakdown voltage	I <sub>E</sub> =-5mA; I <sub>C</sub> =0	-6			V
V <sub>CEsat</sub>	Collector-emitter saturation voltage	I <sub>C</sub> =-0.5 A; I <sub>B</sub> =-50mA			-3.0	V
V <sub>BE</sub>	Base-emitter voltage	I <sub>C</sub> =-50mA; V <sub>CE</sub> =-4V			-1.0	V
I <sub>CBO</sub>	Collector cut-off current	V <sub>CB</sub> =-120V; I <sub>E</sub> =0			-1	μA
h <sub>FE-1</sub>	DC current gain	I <sub>C</sub> =-50mA; V <sub>CE</sub> =-4V	60		200	
h <sub>FE-2</sub>	DC current gain	I <sub>C</sub> =-0.5A; V <sub>CE</sub> =-10V	60			
C <sub>OB</sub>	Output capacitance	I <sub>E</sub> =0; V <sub>CB</sub> =-100V, f=1MHz		30		pF

◆ h<sub>FE-1</sub> classifications

B	C
60-120	100-200



Silicon PNP Power Transistors

2SB861

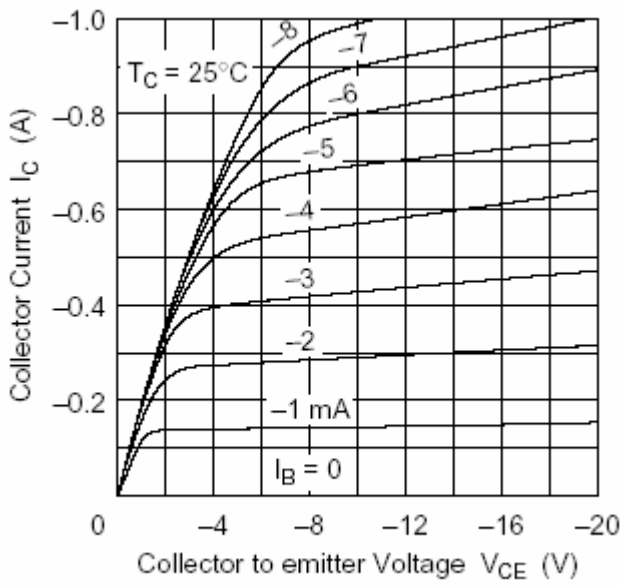


Fig.3 Static Characteristic

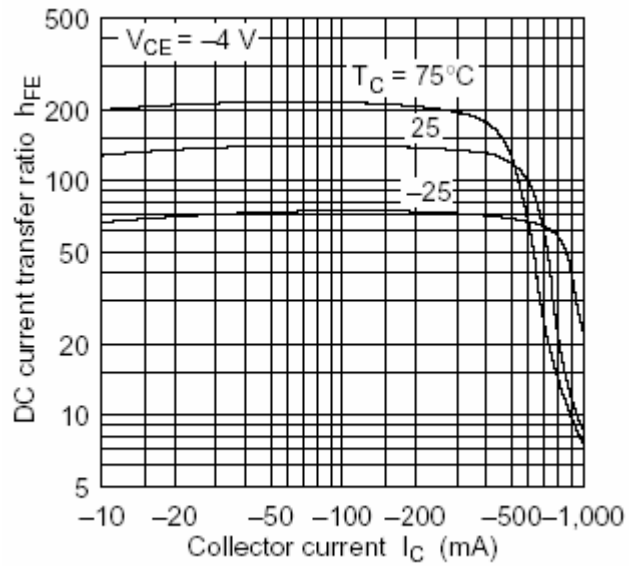


Fig.4 DC current Gain

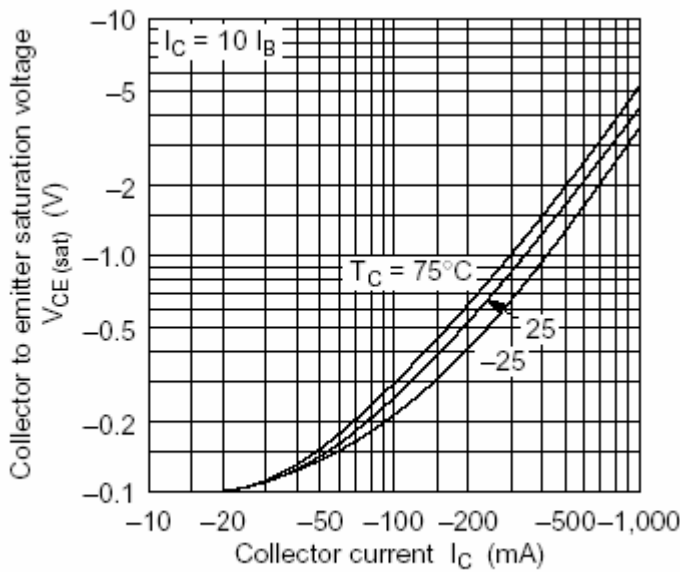


Fig.5 Collector-Emitter Saturation Voltage

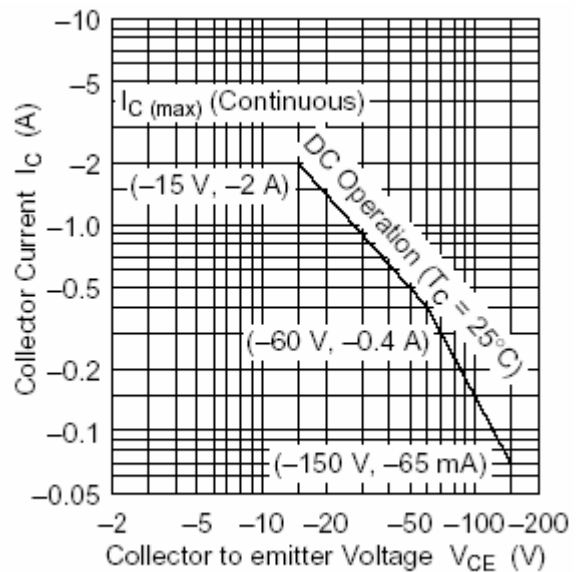


Fig.6 Safe Operating Area