

Description


The MVL-721xx series package is 2X5 rectangular led lamps standard color diffused plastic lens. The Hi-EFF red (HR) and yellow LED chips are made with Gallium Arsenide Phosphide on Gallium Phosphide diode. The green LED chip is made with Gallium Phosphide on Gallium Phosphide diode. The red (DR) chip is made with Aluminum Gallium Arsenide on Gallium Arsenide diode. The red (UR) chip is made with Aluminum Gallium Arsenide on Aluminum Gallium Arsenide diode.

Applications

- I.C. compatible
- Excellent uniformity of light emittance
- Most suitable for use like level indicator
- Low power consumption

Package Dimensions

Unite: mm (inches)

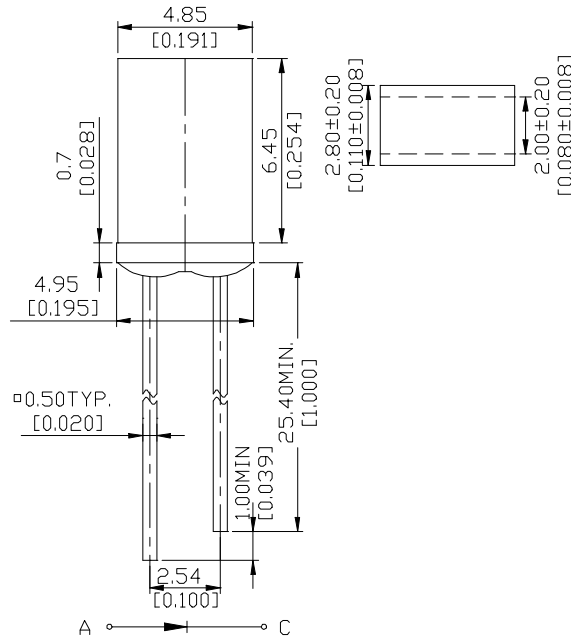

NOTES :

1. Tolerance is ± 0.25 mm (.010") unless otherwise noted.
2. Protruded resin under flange is 1.5 mm (.059") max.
3. Lead spacing is measured where the leads emerge from the package.

Absolute Maximum Ratings

| Parameter | Symbol | Maximum Rating | | | Unit |
|---|------------------|------------------|--------|-----|-------|
| | | GREEN | YELLOW | HR | |
| Power Dissipation | Pad | 100 | 60 | 100 | mW |
| Peak Forward Current (1/10 Duty Cycle 0.1ms pulse width) | I _{pf} | 120 | 80 | 120 | A |
| Continuous Forward Current | I _{af} | 30 | 20 | 30 | mA/°C |
| Derating Linear From 25°C | | 0.4 | 0.25 | 0.4 | mA |
| Reverse Voltage | V _R | 5 | 5 | 5 | V |
| Operating Temperature Range | T _{opr} | -55°C to + 100°C | | | |
| Storage Temperature Range | T _{stg} | -55°C to + 100°C | | | |
| Lead Soldering Temperature (1.6mm from body) for 3 seconds at 260°C | | | | | |

Optical -Electrical Characteristics

Part No. : MVL-721G

@T_A=25°C

| Parameter | Test Conditions | Symbol | Min . | Typ . | Max . | Unit . |
|--------------------------|----------------------|-------------------|-------|-------|-------|--------|
| Luminous Intensity | I _F =10mA | I _V | 1.2 | 3.7 | - | mcd |
| Forward Voltage | I _F =20mA | V _F | - | 2.1 | 2.8 | V |
| Reverse Current | V _R =5V | I _R | - | - | 100 | μA |
| Wavelength | I _F =20mA | λ _p | - | 565 | - | nm |
| Spectral Line Half Width | I _F =20mA | Δλ | - | 30 | - | nm |
| Viewing Angle | I _F =20mA | 2θ _{1/2} | - | 140 | - | deg |

Part No. : MVL-721Y

@T_A=25°C

| Parameter | Test Conditions | Symbol | Min . | Typ . | Max . | Unit . |
|--------------------------|----------------------|-------------------|-------|-------|-------|--------|
| Luminous Intensity | I _F =10mA | I _V | 0.8 | 2.8 | - | mcd |
| Forward Voltage | I _F =20mA | V _F | - | 2.1 | 2.8 | V |
| Reverse Current | V _R =5V | I _R | - | - | 100 | μA |
| Wavelength | I _F =20mA | λ _p | - | 585 | - | nm |
| Spectral Line Half Width | I _F =20mA | Δλ | - | 35 | - | nm |
| Viewing Angle | I _F =20mA | 2θ _{1/2} | - | 140 | - | deg |

Part No. : MVL-721HR

@T_A=25°C

| Parameter | Test Conditions | Symbol | Min . | Typ . | Max . | Unit . |
|--------------------------|----------------------|-------------------|-------|-------|-------|--------|
| Luminous Intensity | I _F =10mA | I _V | 1.2 | 3.8 | - | mcd |
| Forward Voltage | I _F =20mA | V _F | - | 2.0 | 2.8 | V |
| Reverse Current | V _R =5V | I _R | - | - | 100 | μA |
| Wavelength | I _F =20mA | λ _p | - | 640 | - | nm |
| Spectral Line Half Width | I _F =20mA | Δλ | - | 40 | - | nm |
| Viewing Angle | I _F =20mA | 2θ _{1/2} | - | 140 | - | deg |

Typical Optical-Electrical Characteristic Curves

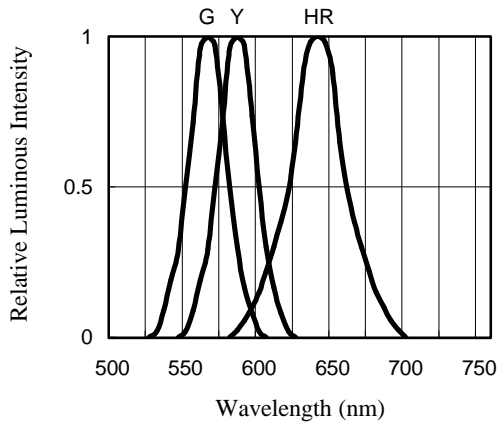


Fig 1. RELATIVE LUMINOUS INTENSITY VS. WAVELENGTH

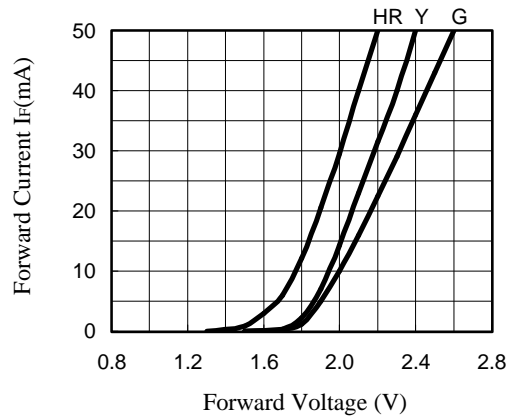


Fig 2. FORWARD CURRENT VS. FORWARD VOLTAGE

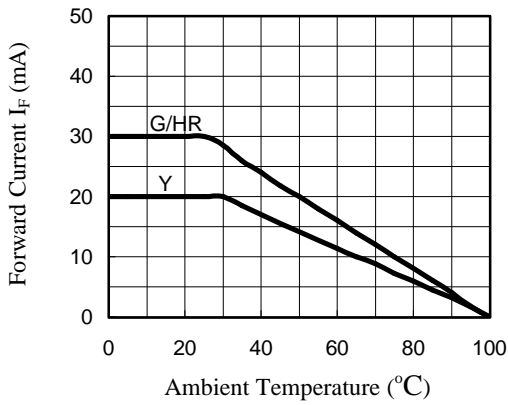


Fig 3. FORWARD CURRENT VS. AMBIENT TEMPERATURE

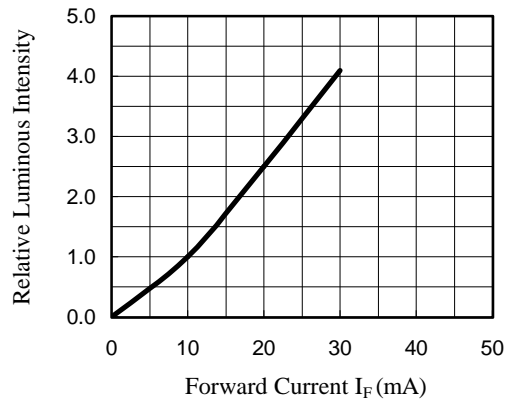


Fig 4. RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

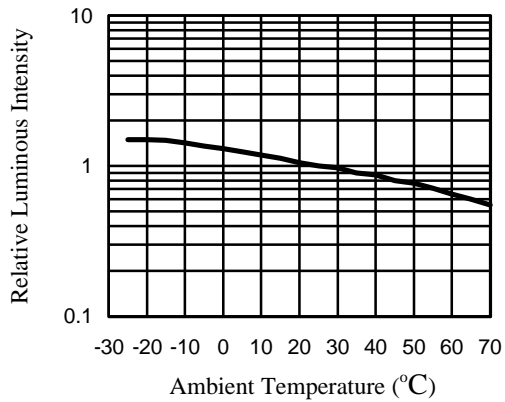


Fig 5. RELATIVE LUMINOUS INTENSITY VS. AMBIENT TEMPERATURE

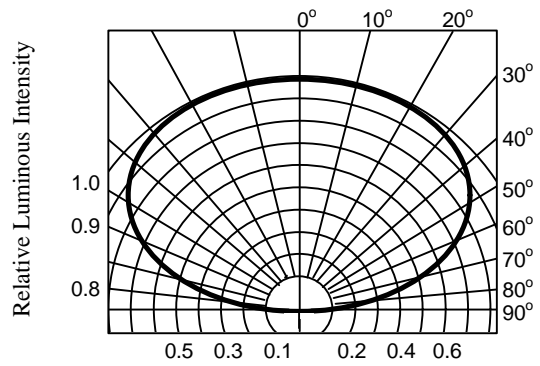


Fig 6. RADIATION DIAGRAM