

## Silicon NPN Power Transistors

2SC3559

## DESCRIPTION


- With TO-220Fa package
- High breakdown voltage
- High speed switching

## APPLICATIONS

- Switching regulator and high voltage switching applications
- High speed DC-DC converter applications

## PINNING

PIN	DESCRIPTION
1	Base
2	Collector
3	Emitter

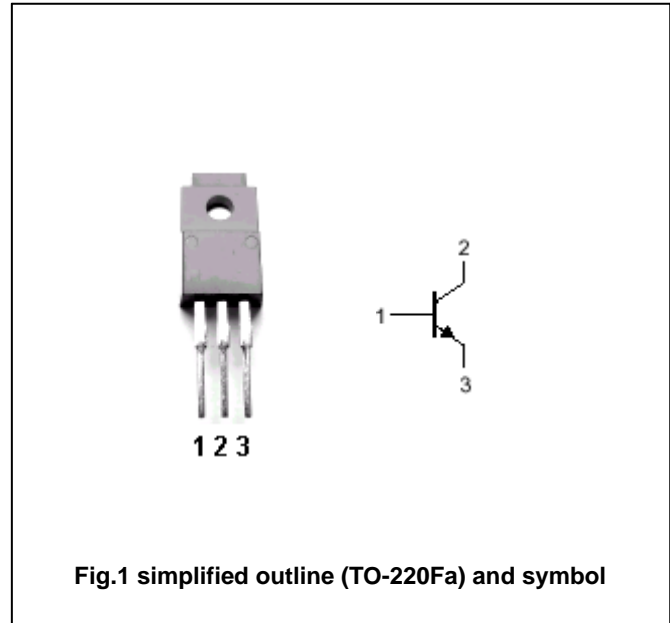

## Absolute maximum ratings (Ta=25°C)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
$V_{CBO}$	Collector-base voltage	Open emitter	900	V
$V_{CEO}$	Collector-emitter voltage	Open base	800	V
$V_{EBO}$	Emitter-base voltage	Open collector	7	V
$I_C$	Collector current (DC)		3	A
$I_{CM}$	Collector current-Peak		5	A
$I_B$	Base current		1	A
$P_C$	Collector power dissipation	$T_C=25^\circ\text{C}$	30	W
		$T_a=25^\circ\text{C}$	2	
$T_j$	Junction temperature		150	$^\circ\text{C}$
$T_{stg}$	Storage temperature		-55~150	$^\circ\text{C}$

## Silicon NPN Power Transistors

## 2SC3559

## CHARACTERISTICS

T<sub>j</sub>=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V <sub>(BR)CEO</sub>	Collector-emitter breakdown voltage	I <sub>C</sub> =10mA, I <sub>B</sub> =0	800			V
V <sub>(BR)CBO</sub>	Collector-base breakdown voltage	I <sub>C</sub> =1mA, I <sub>E</sub> =0	900			V
V <sub>CEsat</sub>	Collector-emitter saturation voltage	I <sub>C</sub> =0.8A; I <sub>B</sub> =0.16A			0.6	V
V <sub>BEsat</sub>	Base-emitter saturation voltage	I <sub>C</sub> =0.8A; I <sub>B</sub> =0.16A			1.2	V
I <sub>CBO</sub>	Collector cut-off current	V <sub>CB</sub> =800V; I <sub>E</sub> =0			0.1	mA
I <sub>EBO</sub>	Emitter cut-off current	V <sub>EB</sub> =7V; I <sub>C</sub> =0			1.0	mA
h <sub>FE</sub>	DC current gain	I <sub>C</sub> =0.8A; V <sub>CE</sub> =5V	10			

## Switching times

t <sub>r</sub>	Rise time	I <sub>B1</sub> =0.08A; I <sub>B2</sub> =-0.2A V <sub>CC</sub> ≈400V; R <sub>L</sub> =500Ω			1.0	μs
t <sub>s</sub>	Storage time				4.0	μs
t <sub>f</sub>	Fall time				1.0	μs

PACKAGE OUTLINE

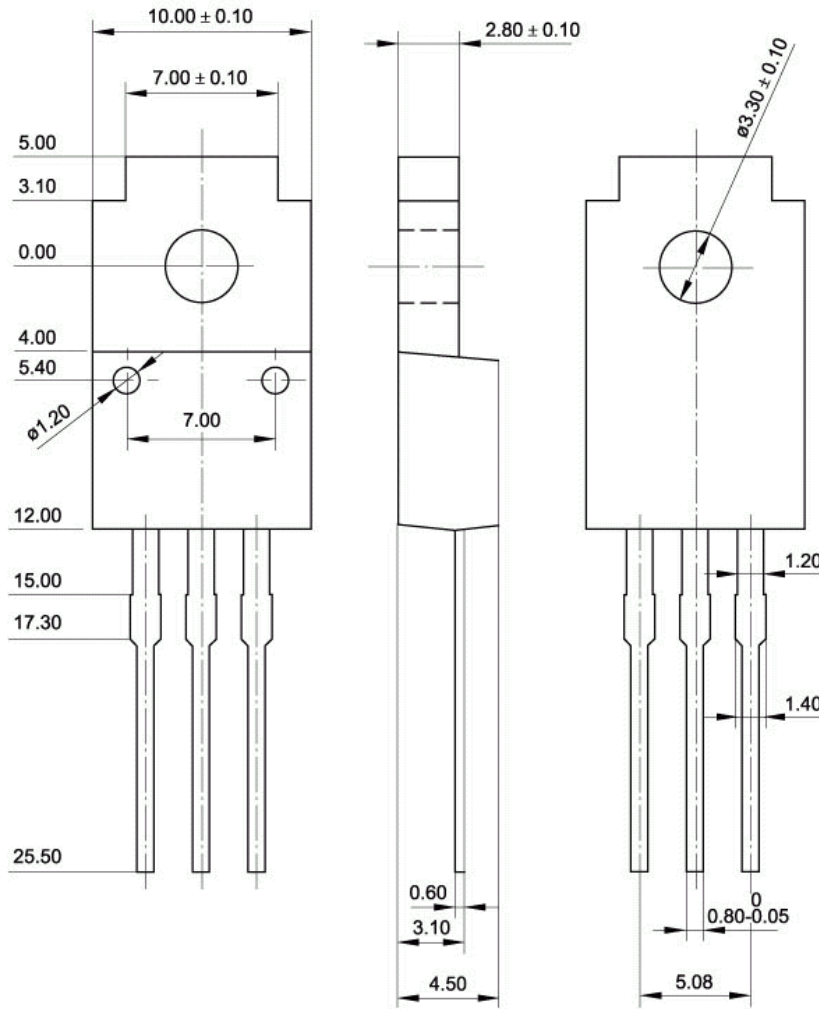


Fig.2 Outline dimensions (unindicated tolerance:  $\pm 0.15$  mm)

Silicon NPN Power Transistors

2SC3559

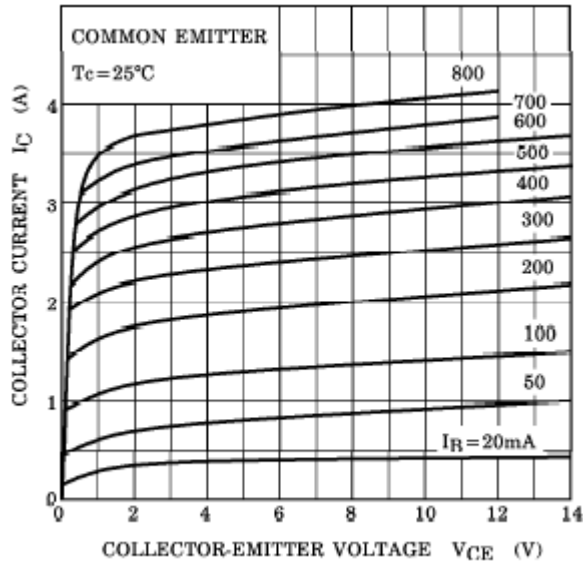


Fig.3 Static Characteristic

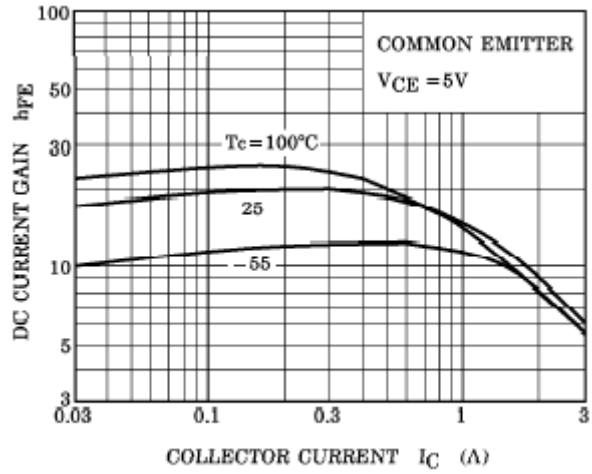


Fig.4 DC current Gain

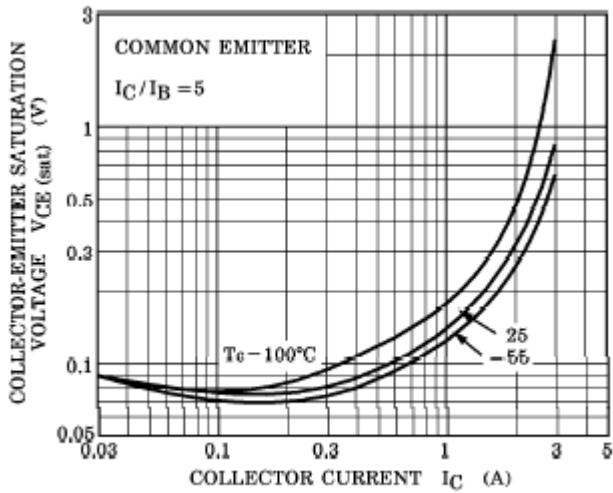


Fig.5 Collector-Emitter Saturation Voltage

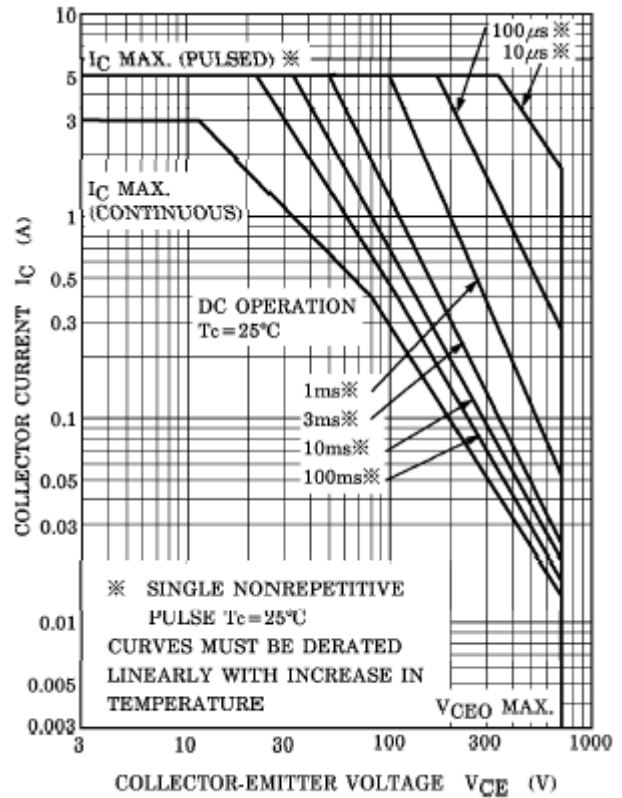


Fig.7 Safe Operating Area

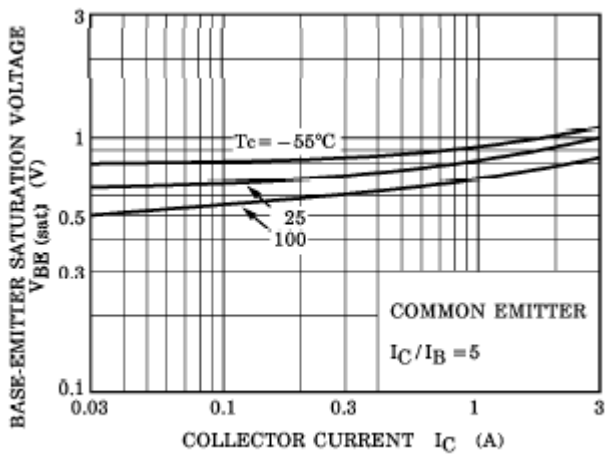


Fig.6 Base-Emitter Saturation Voltage