


# FTA

## IEC Filter Small Size

### Electrical schematics

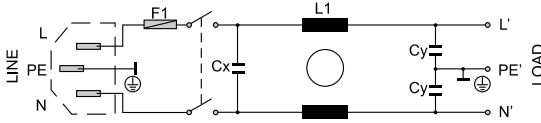

### General Specifications

Maximum operating voltage: 250Vac.

Operating frequency: DC - 60Hz.

Hipot test voltage: L/N→PE: 1800Vac 2s.

L→N: 1700 Vdc 2s.

Application class: HPF Acc. TO DIN 40040 (-25°C/+85°C/95% RH, 30d).

Flammability class: UL 94 V2.

### IEC filter small size

With IEC connector filter, fuse and switch.

External connections by user.

Small size.

M: For electromedical applications

### Product List

| TYPE   | I     | L-1    | CX     | CY     | HOUSING | L.CURRENT | CONNECTION   | WEIGHT<br>±g |
|--------|-------|--------|--------|--------|---------|-----------|--------------|--------------|
| FTA-3Z | 3 Amp | 1,8 mH | 100 nF | 3,3 nF | 254     | 0,45mA    | FASTON 6,3mm | 64           |
| FTA-6Z | 6 Amp | 0,7 mH | 100 nF | 3,3 nF | 254     | 0,45mA    | FASTON 6,3mm | 64           |

### Insertion Loss

----- ASYM  
——— SYM

