

Silicon NPN Power Transistors

MJF44H11

DESCRIPTION


- With TO-220F package
- Fast switching speeds
- Low collector saturation voltage
- Complement to type MJF45H11

APPLICATIONS

- For general purpose power amplification and switching regulators, converters and power amplifiers applications

PINNING

PIN	DESCRIPTION
1	Base
2	Collector
3	Emitter

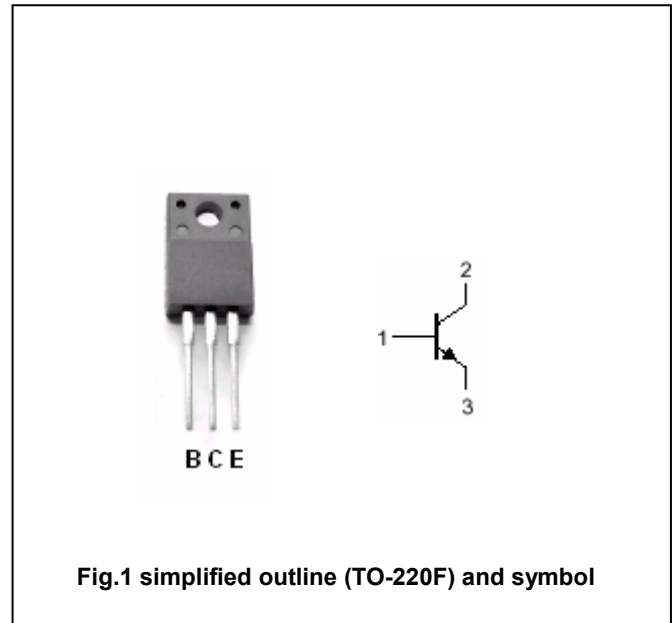ABSOLUTE MAXIMUM RATINGS($T_c=25^\circ\text{C}$)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V_{CBO}	Collector-base voltage	Open emitter	80	V
V_{CEO}	Collector-emitter voltage	Open base	80	V
V_{EBO}	Emitter-base voltage	Open collector	5	V
I_C	Collector current (DC)		10	A
I_{CM}	Collector current-Peak		20	A
P_D	Total power dissipation	$T_c=25^\circ\text{C}$	36	W
		$T_a=25^\circ\text{C}$	2.0	
T_j	Junction temperature		150	$^\circ\text{C}$
T_{stg}	Storage temperature		-55~150	$^\circ\text{C}$

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	VALUE	UNIT
$R_{th\ j-C}$	Thermal resistance from junction to case	3.5	$^\circ\text{C}/\text{W}$
$R_{th\ j-A}$	Thermal resistance from junction to ambient	62.5	$^\circ\text{C}/\text{W}$

Silicon NPN Power Transistors

MJF44H11

CHARACTERISTICS

T_j=25 °C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{CEO(SUS)}	Collector-emitter sustaining voltage	I _C =30mA I _B =0,	80			V
V _{CE(sat)}	Collector-emitter saturation voltage	I _C =8A; I _B =0.4A			1.0	V
V _{BE(sat)}	Base-emitter saturation voltage	I _C =8A ; I _B =0.8A			1.5	V
I _{CES}	Collector cut-off current	V _{CE} =RatedBV _{CEO} ; V _{BE} =0			10	μA
I _{EBO}	Emitter cut-off current	V _{EB} =5V; I _C =0			10	μA
h _{FE-1}	DC current gain	I _C =2A ; V _{CE} =1V	60			
h _{FE-2}	DC current gain	I _C =4A ; V _{CE} =1V	40			
f _T	Transition frequency	I _C =0.5A ; V _{CE} =10V, f=20MHz		50		MHz
C _{cb}	Collector capacitance	f=1MHz ; V _{CB} =10V		130		pF

Switching times

t _{on}	Turn-on time	I _C =5A I _{B1} =- I _{B2} =0.5A		0.3		μs
t _s	Storage time			0.5		μs
t _f	Fall time			0.14		μs

Silicon NPN Power Transistors

MJF44H11

PACKAGE OUTLINE

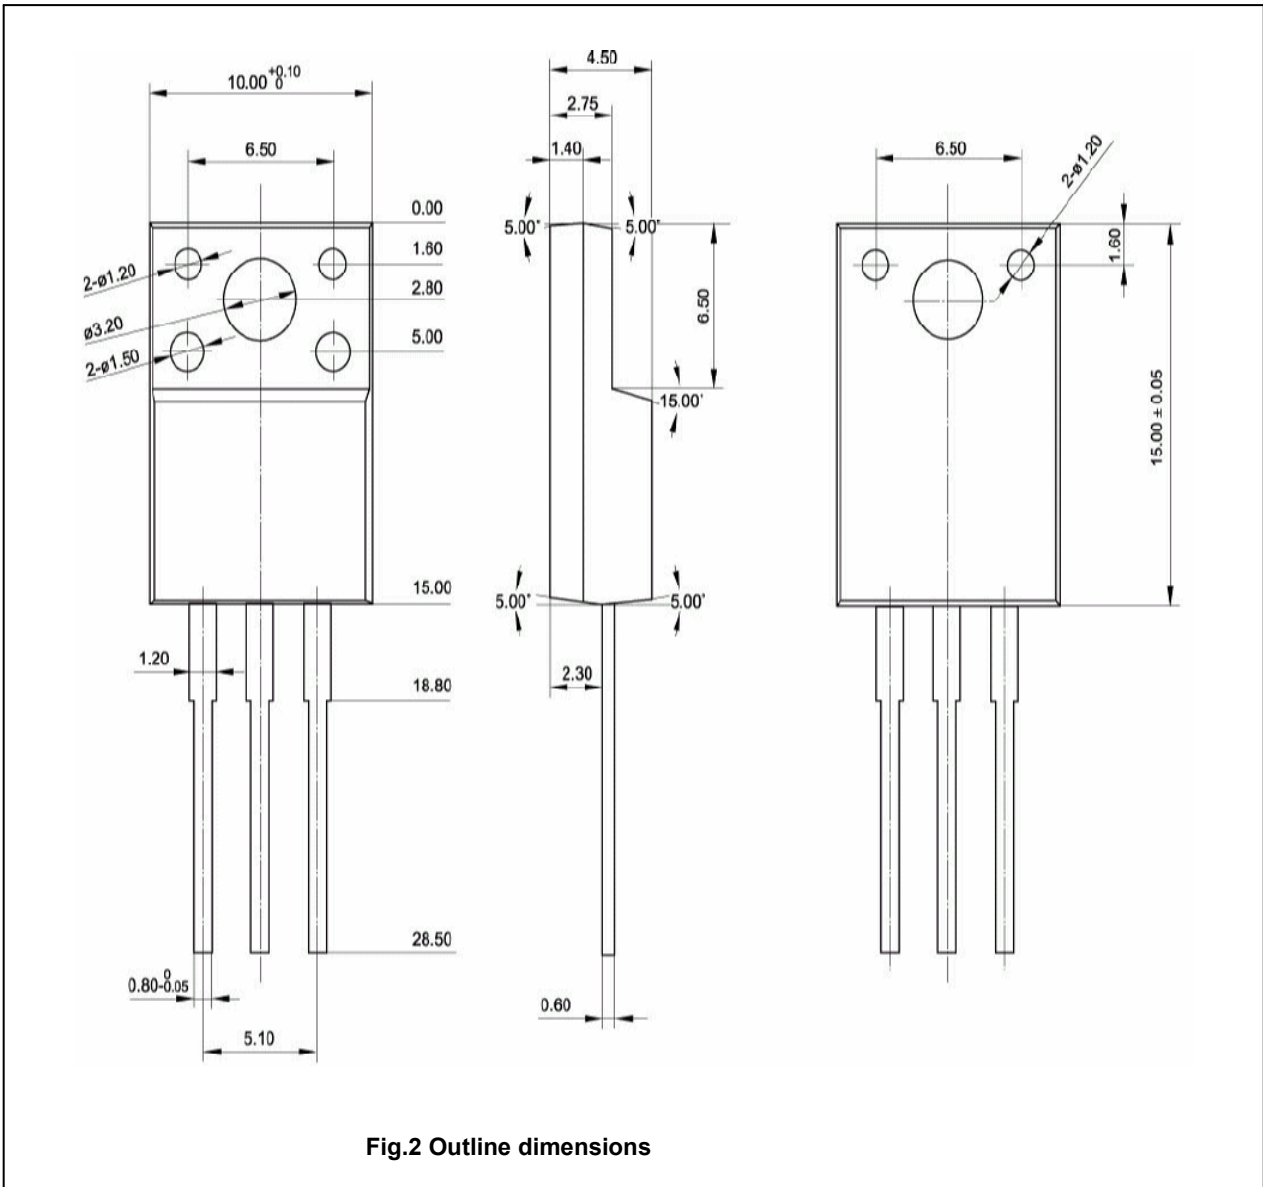


Fig.2 Outline dimensions