

# Single Phase & 3-Phase Blocking Filters

P-1240-016 (single phase), P-1240-017 (3-phase)

## Features

- Protects PLC communications of outdoors interference signals and noise.
- Avoids the propagation of PLC signal into neighbours houses.



P-1240-016 (Single Phase)




P-1240-017 (3-Phase)

## Electrical parameters


	Single Phase	3-Phase
Rated voltage	300 V	520 V
Rated frequency	50/60 Hz	
Climatic category (DIN 40040)	HMF	
Test voltage	Line - Neutral 1800 Vac	2200 Vdc
	Line/Neutral-PE N/A	1300 Vac
Cable length	150 mm	
Cable section	4 mm <sup>2</sup>	

## Dimensions

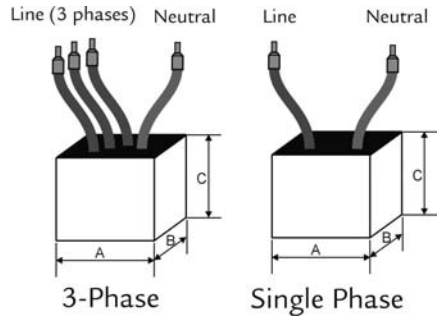

	Single Phase	3-Phase
A	26.5 mm	33 mm
B	14.5 mm	33 mm
C	29.5 mm	25 mm

## Electrical diagram

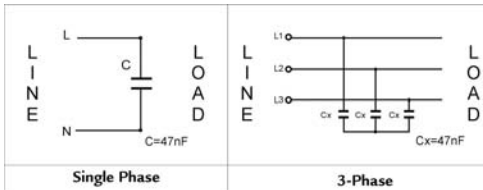

## Installation

