


**RED**

**Item No.: 115280**

1. This specification applies to GaAlAs / GaAlAs LED Chips (substrate removed)
2. Structure
  - 2.1 Mesa structure
  - 2.2 Electrodes
 

p-side (anode)	Au alloy
n-side (cathode)	Au alloy
3. Outlines (dimensions in microns)

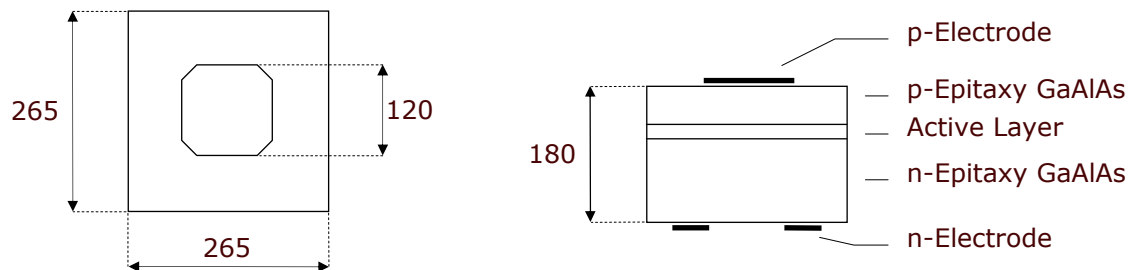

Wire bond contacts can also be circular or square

4. Electrical and optical characteristics (T=25°C)

Parameter	Symbol	Conditions	min	typ	max	Unit
Forward voltage	$V_F$	$I_F = 20 \text{ mA}$		1,90	2,30	V
Reverse current	$I_R$	$V_R = 5 \text{ V}$			10	$\mu\text{A}$
Luminous intensity *	$I_V$	$I_F = 20 \text{ mA}$	17,0	22,0		mcd
Peak wavelength	$\lambda_P$	$I_F = 20 \text{ mA}$	650	656	665	nm

Brightness measurement at OSA on gold plate

5. Packing

Dice on adhesive film with 1) wire bond side on top  
2) back contact on top

6. Labeling

Type	Lot No.	$I_V$ typ min max	Quantity
------	---------	-------------------------	----------