


- Split Bobbin Construction
- Dual Primaries : 115 V / 230 V
- UL 94V-0 Recognized Components
- UL 1446 Class B Insulation System
- Meets or exceeds CSA/TUV/VDE Specifications for Creepage, Clearance and Dielectric Strength

Electrical Parameters @ 25° C


Part Number	Primary Voltage		Secondary Voltage		Secondary Current (A-Rms)		Power Rating (VA)
	Parallel Connection	Series Connection	Parallel Connection	Series Connection	Parallel Connection	Series Connection	
EPC3100-1	115	230	5.0	10	7.20	3.60	36
EPC3100-2	115	230	6.3	12.6	5.70	2.85	36
EPC3100-3	115	230	8.0	16	4.50	2.25	36
EPC3100-4	115	230	10	20	3.60	1.80	36
EPC3100-5	115	230	12	24	3.00	1.50	36
EPC3100-6	115	230	14	28	2.60	1.30	36
EPC3100-7	115	230	18	36	2.00	1.00	36
EPC3100-8	115	230	24	48	1.50	0.75	36
EPC3100-9	115	230	28	56	1.30	0.65	36
EPC3100-10	115	230	60	120	0.60	0.30	36

• Switching Frequency : 50 Hz - 500 Hz • Isolation : 2500 Vrms •

Package

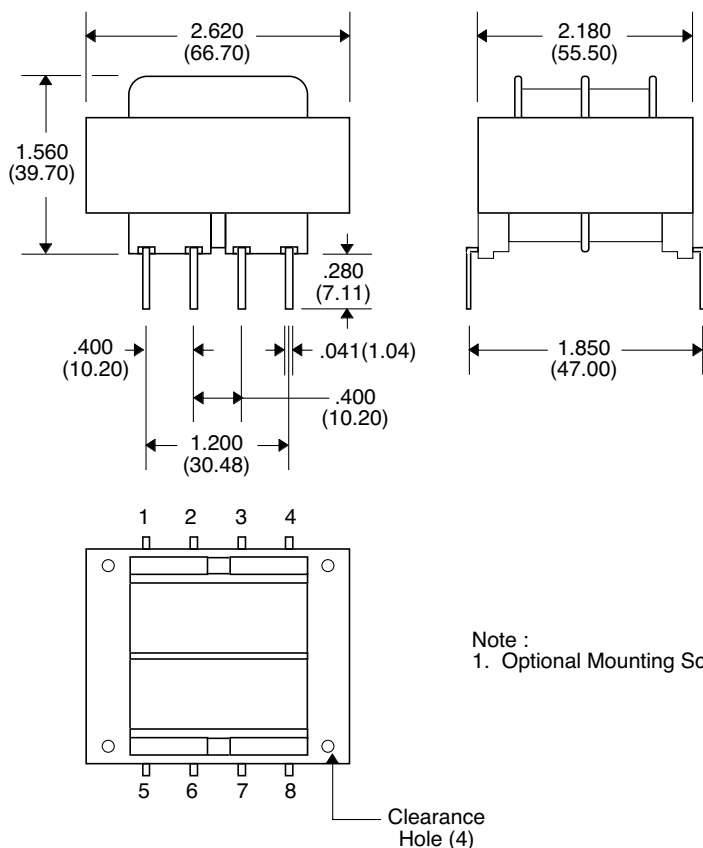

Schematic



Note :
1. Optional Mounting Screws and Nut : Size #6 Screw

Unless Otherwise Specified Dimensions are in Inches /mm ± .010 / .25