

# Surface Mount Phase Detector

## SYPD-2+ SYPD-2

50Ω High Output 10 to 200 MHz




### Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Input Power	50mW
Peak IF current	20mA

### Pin Connections

RF REF (RF2)	2
RF IN (RF1)	1
DC OUT (I)	3
GROUND	4,5,6


### Outline Drawing

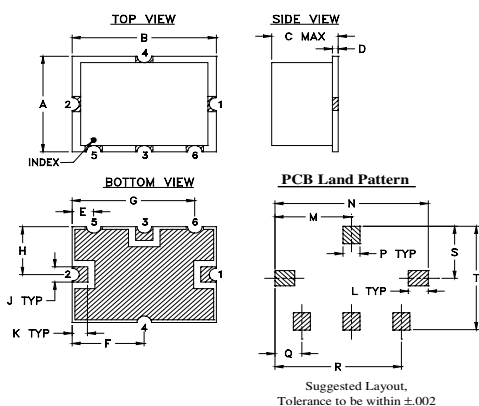

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K
.38	.50	.23	.020	.075	.250	.425	.187	.050	.050
9.65	12.70	5.84	0.51	1.91	6.35	10.80	4.75	1.27	1.27
L	M	N	P	Q	R	S	T	wt.	
.070	.270	.540	.060	.095	.445	.208	.415	grams	
1.78	6.86	13.72	1.52	2.41	11.30	5.28	10.54	0.8	

Demo Board MCL P/N: TB-12  
Suggested PCB Layout (PL-079)

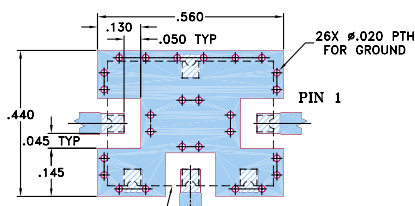

- NOTE: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
2. GROUND PAD SHALL BE FREE OF SOLDER MASK IF REQUIRED FOR SOLDERING.  
3. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER), SEE NOTE 2.
  - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

### Features

- wideband, 10 to 200 MHz
- low DC offset, 0.3 mV typ.
- high DC output, 1000 mV typ.
- high isolation, 40 dB min.

### Applications




- monitoring circuits
- leveling circuits
- PLL

### Phase Detector Electrical Specifications


FREQUENCY (MHz)	POWER IN	SCALE FACTOR	IMPEDANCE (ohms)	ISOLATION (dB)	OUTPUT POLARITY	DC OUTPUT (mV)	FIGURE OF MERIT
RF1	RF1						
RF2	RF2						
	(dBm)	mV/deg.		RF1/RF2	RF1/RF2	Max. Offset	
				Min.	In-Phase	Typ. Min. Typ. Max.	Typ.
10-200	DC-50	7	500	40	neg.	100 700 0.3 1	143

### Typical Performance Data

Frequency (MHz)	DC Output mV		DC Offset mV		RF1-RF2 Isolation (dB)
	$\bar{X}$	$\sigma$	$\bar{X}$	$\sigma$	
10.00	-832.85	8.84	-0.20	0.31	73.96
20.00	-852.33	8.56	-0.21	0.32	71.39
32.86	-873.37	8.31	-0.22	0.33	68.61
40.00	-885.64	8.09	-0.23	0.33	67.41
46.79	-894.39	7.95	-0.23	0.33	66.22
60.71	-917.70	7.62	-0.22	0.35	64.00
74.64	-935.82	7.73	-0.25	0.37	61.81
80.00	-941.09	7.83	-0.24	0.37	61.28
88.57	-947.91	8.28	-0.23	0.38	60.45
100.00	-941.46	8.44	-0.28	0.40	59.49
110.00	-942.62	8.94	-0.29	0.41	58.55
120.00	-940.69	9.51	-0.22	0.40	57.75
130.36	-938.41	10.59	-0.19	0.39	57.17
140.00	-936.70	11.75	-0.16	0.37	56.90
144.29	-934.52	12.34	-0.17	0.36	56.82
150.00	-929.14	12.91	-0.13	0.38	56.68
158.21	-919.94	13.74	-0.08	0.40	56.42
172.14	-890.67	15.14	0.06	0.41	55.90
186.07	-863.24	17.28	0.28	0.31	55.11
200.00	-867.58	20.41	0.44	0.24	54.28

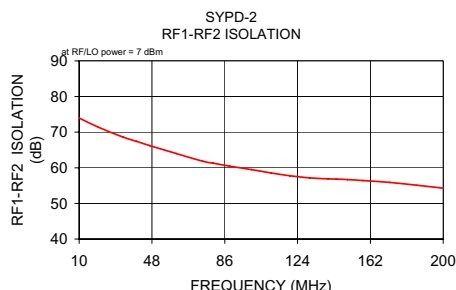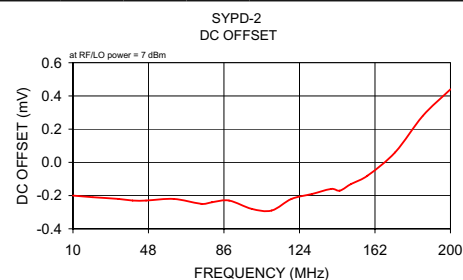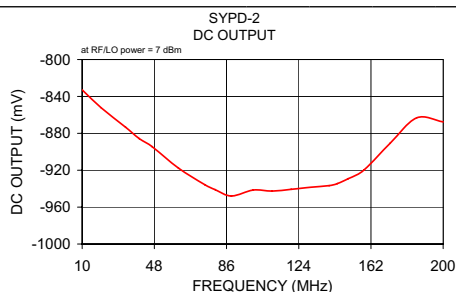

### electrical schematic



**Mini-Circuits**  
ISO 9001 ISO 14001 CERTIFIED

ALL NEW  
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

RF/IF MICROWAVE COMPONENTS

REV. C  
M112207  
SYPD-2  
DJ/TD/AM  
070810