



**POWER MATE  
TECHNOLOGY CO.,LTD.**



# PFKC05-SERIES

## FEATURES

- 5 WATTS REGULATED OUTPUT POWER
- OUTPUT CURRENT UP TO 1000mA
- STANDARD 1.25 X 0.80 X 0.40 INCH
- HIGH EFFICIENCY UP TO 81%
- 2:1 WIDE INPUT VOLTAGE RANGE
- SWITCHING FREQUENCY (100KHz, MIN)
- OVER CURRENT PROTECTION
- STANDARD 24 PIN DIP PACKAGE & SMD TYPE PACKAGE
- CE MARK MEETS 2006/95/EC, 93/68/EEC AND 2004/108/EC
- UL60950-1, EN60950-1 AND IEC60950-1 LICENSED
- ISO9001 CERTIFIED MANUFACTURING FACILITIES
- COMPLIANT TO RoHS EU DIRECTIVE 2002/95/EC

## APPLICATIONS

Wireless Network  
Telecom/Datacom  
Industry Control System  
Measurement Equipment  
Semiconductor Equipment

## OPTIONS

SMD TYPE

## DESCRIPTION

The PFKC05 series offer 5 watts of output power from a package in an IC compatible 24pin DIP configuration without derating to 71°C ambient temperature and pin to pin compatible with PFKC03, FKC03, FKC05 series. PFKC05 series have 2:1 wide input voltage of 9-18, 18-36 and 36-75VDC.

## TECHNICAL SPECIFICATION

All specifications are typical at nominal input, full load and 25°C otherwise noted

OUTPUT SPECIFICATIONS		
Output power	5 Watts, max.	
Voltage accuracy	Full load and nominal Vin	± 1%
Minimum load (Note 7)		See table
Line regulation	LL to HL at Full Load	± 0.2%
Load regulation	Min. Load to Full Load	Single ± 0.5% Dual ± 2%
Cross regulation (Dual)	Asymmetrical load 25% / 100% FL	± 5%
Ripple and noise	20MHz bandwidth	See table
Temperature coefficient		±0.02% / °C, max.
Transient response recovery time	25% load step change	500µS
Over load protection	% of FL at nominal input	180%, typ.
Short circuit protection		Continuous, automatics recovery
GENERAL SPECIFICATIONS		
Efficiency		See table
Isolation voltage	Input to Output	Standard 1600VDC, min. Suffix " H " 3000VDC, min.
Isolation resistance		10 <sup>9</sup> ohms, min.
Isolation capacitance		300pF, max.
Switching frequency		100KHz, min.
Approvals and standard		IEC60950-1, UL60950-1, EN60950-1
Case material		Non-conductive black plastic
Base material		Non-conductive black plastic
Potting material		Epoxy (UL94-V0)
Dimensions		1.25 X 0.80 X 0.40 Inch (31.8 X 20.3 X 10.2 mm)
Weight	DIP	14g (0.48oz)
	SMD	15g (0.52oz)
MTBF (Note 1)	BELLCORE TR-NWT-000332	3.731 x 10 <sup>6</sup> hrs
	MIL-HDBK-217F	2.591 x 10 <sup>6</sup> hrs

INPUT SPECIFICATIONS			
Input voltage range	12V nominal input	9 – 18VDC	
	24V nominal input	18 – 36VDC	
	48V nominal input	36 – 75VDC	
Input filter		Pi type	
Input surge voltage	12V input	36VDC	
100mS max	24V input	50VDC	
	48V input	100VDC	
Input reflected ripple current	Nominal Vin and full load	150mA p-p	
Start up time	Nominal Vin and constant resistive load	Power up	30mS, typ.
ENVIRONMENTAL SPECIFICATIONS			
Operating ambient temperature		-25°C ~ +71°C (non derating)	
Storage temperature range		-55°C ~ +105°C	
Thermal shock		MIL-STD-810F	
Vibration		MIL-STD-810F	
Relative humidity		5% to 95% RH	
EMC CHARACTERISTICS			
EMI	EN55022	Class A	
ESD	EN61000-4-2	Air ± 8KV Contact ± 6KV	Perf. Criteria A
Radiated immunity	EN61000-4-3	10 V/m	Perf. Criteria A
Fast transient (Note 6)	EN61000-4-4	± 2KV	Perf. Criteria B
Surge (Note 6)	EN61000-4-5	± 1KV	Perf. Criteria B
Conducted immunity	EN61000-4-6	10 Vr.m.s	Perf. Criteria A



[WWW.PDUKE.COM](http://WWW.PDUKE.COM)

Page 1 of 3 Issued Date : 2008/05/21






**POWER MATE  
TECHNOLOGY CO.,LTD.**

## **5 WATTS DC-DC CONVERTER**

Model Number	Input Range	Output Voltage	Output Current		Output <sup>(4)</sup> Ripple & Noise	Input Current No load <sup>(3)</sup>	Current Full load <sup>(2)</sup>	Eff <sup>(4)</sup> (%)	Capacitor Load max <sup>(5)</sup>
			Min. load	Full load					
PFKC05-12S33	9 – 18 VDC	3.3 VDC	100mA	1000mA	75mVp-p	25mA	404mA	72	2200µF
PFKC05-12S05	9 – 18 VDC	5 VDC	100mA	1000mA	75mVp-p	10mA	579mA	76	1000µF
PFKC05-12S12	9 – 18 VDC	12 VDC	47mA	470mA	120mVp-p	30mA	618mA	80	220µF
PFKC05-12S15	9 – 18 VDC	15 VDC	40mA	400mA	150mVp-p	20mA	658mA	80	150µF
PFKC05-12D05	9 – 18 VDC	± 5 VDC	±50mA	± 500mA	75mVp-p	20mA	571mA	77	± 680µF
PFKC05-12D12	9 – 18 VDC	± 12 VDC	±20mA	± 230mA	120mVp-p	50mA	605mA	80	± 100µF
PFKC05-12D15	9 – 18 VDC	± 15 VDC	±19mA	± 190mA	150mVp-p	30mA	625mA	80	± 68µF
PFKC05-24S33	18 – 36 VDC	3.3 VDC	100mA	1000mA	75mVp-p	15mA	202mA	72	2200µF
PFKC05-24S05	18 – 36 VDC	5 VDC	100mA	1000mA	75mVp-p	10mA	278mA	79	1000µF
PFKC05-24S12	18 – 36 VDC	12 VDC	47mA	470mA	120mVp-p	10mA	306mA	81	220µF
PFKC05-24S15	18 – 36 VDC	15 VDC	40mA	400mA	150mVp-p	10mA	325mA	81	150µF
PFKC05-24D05	18 – 36 VDC	± 5 VDC	±50mA	± 500mA	75mVp-p	10mA	282mA	78	± 680µF
PFKC05-24D12	18 – 36 VDC	± 12 VDC	±23mA	± 230mA	120mVp-p	40mA	299mA	81	± 100µF
PFKC05-24D15	18 – 36 VDC	± 15 VDC	±19mA	± 190mA	150mVp-p	10mA	309mA	81	± 68µF
PFKC05-48S33	36 – 75 VDC	3.3 VDC	100mA	1000mA	75mVp-p	5mA	100mA	73	2200µF
PFKC05-48S05	36 – 75 VDC	5 VDC	100mA	1000mA	75mVp-p	5mA	141mA	78	1000µF
PFKC05-48S12	36 – 75 VDC	12 VDC	47mA	470mA	120mVp-p	5mA	153mA	81	220µF
PFKC05-48S15	36 – 75 VDC	15 VDC	40mA	400mA	150mVp-p	5mA	162mA	81	150µF
PFKC05-48D05	36 – 75 VDC	± 5 VDC	±50mA	± 500mA	75mVp-p	10mA	143mA	77	± 680µF
PFKC05-48D12	36 – 75 VDC	± 12 VDC	±23mA	± 230mA	120mVp-p	10mA	149mA	81	± 100µF
PFKC05-48D15	36 – 75 VDC	± 15 VDC	±19mA	± 190mA	150mVp-p	10mA	154mA	81	± 68µF

**Note**


1. BELLCORE TR-NWT-000332. Case 1: 50% Stress, Temperature at 40°C.  
MIL-HDBK-217F Notice2 @Ta=25 °C, Full load(Ground, Benign, controlled environment).
2. Maximum value at nominal input voltage and full load.
3. Typical value at nominal input voltage and no load.
4. Typical value at nominal input voltage and full load.
5. Test by minimum Vin and constant resistive load.
6. An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5.  
The filter capacitor Power Mate suggest: Nippon chemi-con KY series, 220µF/100V, ESR 48mΩ.
7. The output requires a minimum loading on the output to maintain specified regulation. Operation under no-load condition will not damage these devices, however they may not meet all listed specification.

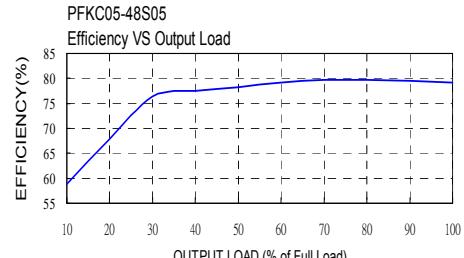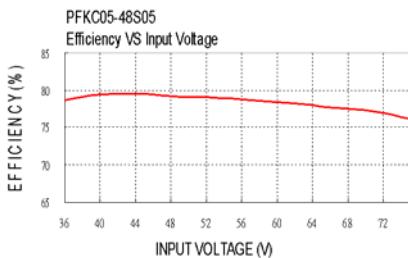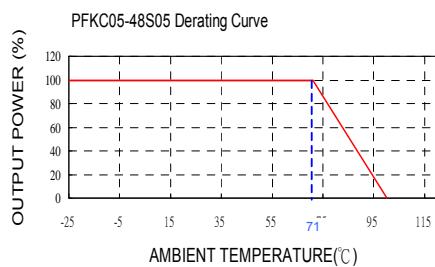



**POWER MATE  
TECHNOLOGY CO.,LTD.**

## 5 WATTS DC-DC CONVERTER

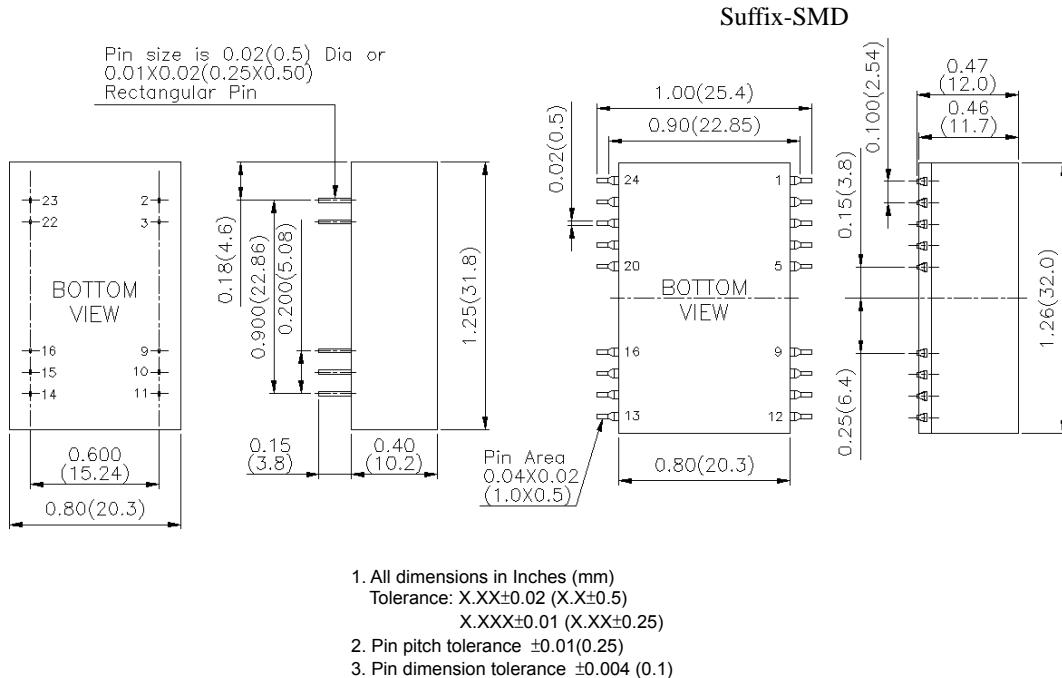

DIP PIN CONNECTION					
PIN	SINGLE	DUAL	PIN	SINGLE	DUAL
2	- INPUT	- INPUT	23	+ INPUT	+ INPUT
3	- INPUT	- INPUT	22	+ INPUT	+ INPUT
9	NC	COMMON	16	- OUTPUT	COMMON
10	NC	NC	15	NC	NC
11	NC	- OUTPUT	14	+ OUTPUT	+ OUTPUT

SMD PIN CONNECTION					
PIN	SINGLE	DUAL	PIN	SINGLE	DUAL
2	- INPUT	- INPUT	23	+ INPUT	+ INPUT
3	- INPUT	- INPUT	22	+ INPUT	+ INPUT
9	NC	COMMON	16	- OUTPUT	COMMON
10	NC	NC	15	NC	NC
11	NC	- OUTPUT	14	+ OUTPUT	+ OUTPUT
Others	NC	NC	Others	NC	NC

