



# PRESS FIT AVALANCHE AUTOMOTIVE RECTIFIER

LPBA40Z/LPBSA40Z

AVALANCHE VOLTAGE 24 to 32 Volts  
CURRENT 40 Amperes


## Technical Specification:

### Features:

- High power capability
- Economical
- Avalanche Voltage: 24V to 32V

## MECHANICAL DATA

- Case: Copper case
- Polarity: As marked of case bottom
- Structural: With cell
- Technology cell vacuum soldered
- Lead: Plated slug, solderable per MIL-STD-202E Method 208C
- Mounting: Press Fit
- Weight: 0.17 ounces 4.84 grams (LPB)
- Weight: 0.14 ounces 3.96 grams (LPBS)

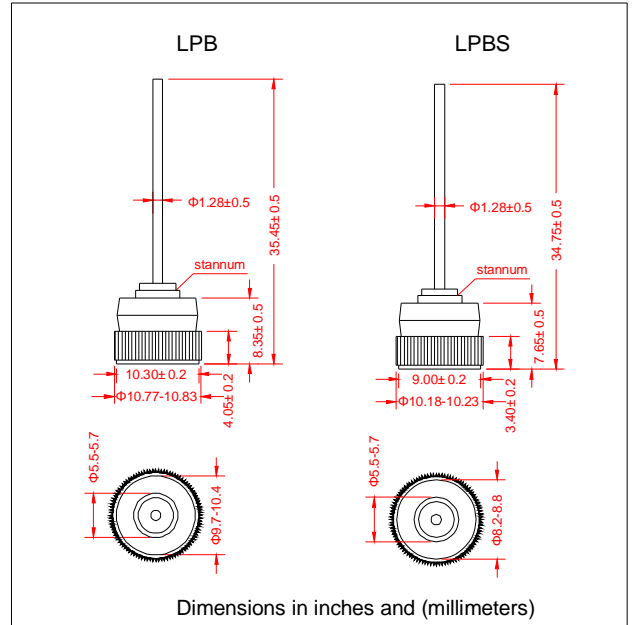

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

Electrical Characteristics @ 25°C	SYMBOLS	MIN	NOMINAL	MAX	UNITS
Peak Repetitive Reverse Voltage	V <sub>RRM</sub>		20		Volts
Working Peak Reverse Voltage	V <sub>RRM</sub>		20		
DC Blocking Voltage	V <sub>DC</sub>		20		
Average Rectified Forward Current (T <sub>c</sub> =125°C)	I <sub>o</sub>		40		Amps
Repetitive Peak Reverse Surge Current T <sub>c</sub> =10msec Dury Cycle<1%	I <sub>RSM</sub>		40		Amps
Breakdown Voltage (V <sub>br</sub> @I <sub>r</sub> =100mA, T <sub>c</sub> =25°C)	V <sub>br1</sub>	24	25-27	32	Volts
I <sub>r</sub> =90Amps, T <sub>c</sub> =150°C, PW=80usec	V <sub>br2</sub>			40	Volts
Forward Voltage Drop @I <sub>f</sub> =100Amps<300usec	V <sub>F</sub>		1.05	1.08	Volts
Peak Forward Surge Current	I <sub>FSM</sub>		500		Amps
Reverse Leakage (V <sub>R</sub> =17Vdc) T <sub>A</sub> =25°C	I <sub>R</sub>		1.0	2.0	uAmps
Operating and Storage Junction Temperature Range	T <sub>J</sub> , T <sub>STG</sub>		-65 to +175		°C

**Notes:** 1. Enough heatsink must be considered in application.

