


1. PART NO. EXPRESSION :

R C C 0 6 0 6 2 2 0 K Z F
 (a) (b) (c) (d)(e)(f)

- (a) Series code
- (b) Dimension code
- (c) Inductance code : 220 = 22uH

- (d) Tolerance code : K = ±10%
- (e) X, Y, Z : Standard part
- (f) F : Lead Free


2. CONFIGURATION & DIMENSIONS :

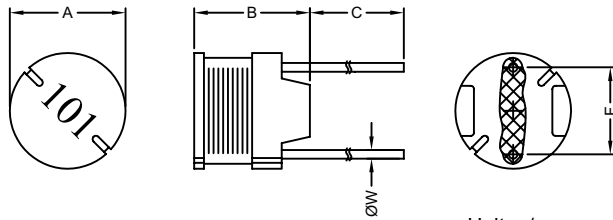


Unit:m/m

A	B	C	F	ØW
6.0±0.5	6.5 Max.	20.0±5.0	4.0±0.5	0.50±0.10

3. SCHEMATIC :



4. MATERIALS :



- (a) Core : DR Ferrite Core
- (b) Wire : Enamelled Copper Wire
- (c) Lead : Tinned Copper Wire
- (d) Adhesive : Epoxy
- (e) Ink : Bon Margue

5. GENERAL SPECIFICATION :

- a) The inductance drop at rated is 10% max.
- b) Temp. rise : 40°C max. at rated current
- c) Storage temp. : -40°C to +125°C
- d) Operating temp. : -40°C to +85°C



RoHS Compliant


NOTE : Specifications subject to change without notice. Please check our website for latest information.



6. ELECTRICAL CHARACTERISTICS :

Part No.	Inductance (μ H)	Test Frequency (Hz)	RDC (Ω) Max.	IDC (A) Max.
RCC0606220KZF	22 \pm 10%	2.52M	0.11	1.27
RCC0606270KZF	27 \pm 10%	2.52M	0.14	1.14
RCC0606330KZF	33 \pm 10%	2.52M	0.17	1.03
RCC0606390KZF	39 \pm 10%	2.52M	0.19	0.95
RCC0606470KZF	47 \pm 10%	2.52M	0.23	0.87
RCC0606560KZF	56 \pm 10%	2.52M	0.26	0.80
RCC0606680KZF	68 \pm 10%	2.52M	0.28	0.72
RCC0606820KZF	82 \pm 10%	2.52M	0.39	0.66
RCC0606101KZF	100 \pm 10%	1K	0.43	0.59
RCC0606121KZF	120 \pm 10%	1K	0.54	0.54
RCC0606151KZF	150 \pm 10%	1K	0.64	0.48
RCC0606181KZF	180 \pm 10%	1K	0.74	0.44
RCC0606221KZF	220 \pm 10%	1K	0.96	0.40
RCC0606271KZF	270 \pm 10%	1K	1.12	0.36
RCC0606331KZF	330 \pm 10%	1K	1.48	0.33
RCC0606391KZF	390 \pm 10%	1K	1.66	0.30
RCC0606471KZF	470 \pm 10%	1K	1.91	0.27
RCC0606561KZF	560 \pm 10%	1K	2.31	0.25
RCC0606681KZF	680 \pm 10%	1K	2.67	0.23
RCC0606821KZF	820 \pm 10%	1K	3.10	0.21
RCC0606102KZF	1000 \pm 10%	1K	4.45	0.19

RECOMMENDED SOLDERING CONDITIONS REFLOW SOLDERINGS

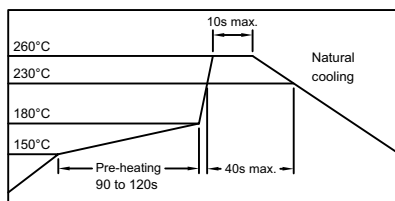

RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.


01.07.2008




SUPERWORLD ELECTRONICS (S) PTE LTD

7. CHARACTERISTICS CURVES :


@ TEMP. RISE VS. DC SUPERPOSITION RESPONSE CURVE

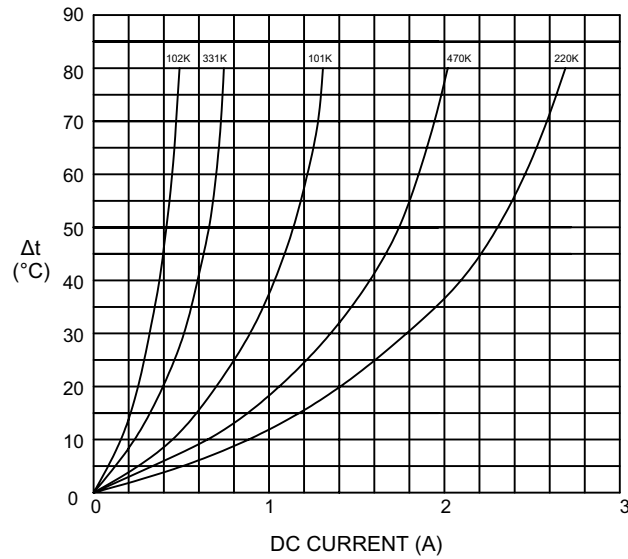

@ INDUCTANCE VS. FREQUENCY RESPONSE CURVE

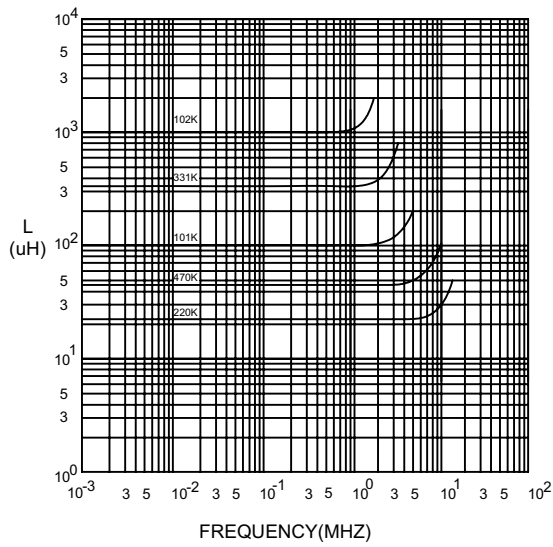

@ INDUCTANCE VS. DC SUPERPOSITION RESPONSE CURVE

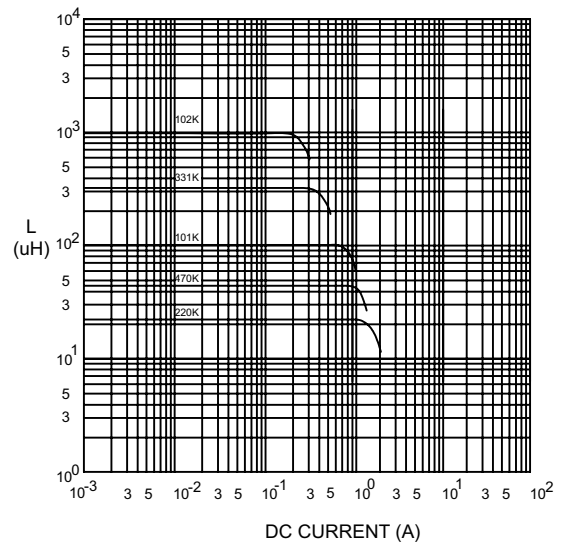

RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

01.07.2008



SUPERWORLD ELECTRONICS (S) PTE LTD

RADIAL CHOKE COIL

RCC0606 SERIES

8. PACKAGING INFORMATION :

Size	RCC0606
Inner Package	Tray
Quantity	140 pcs

9. UL CARD :

OBMW2		November 30, 2000		
Magnet Wire - Component				
PACIFIC ELECTRIC WIRE & CABLE (SHENZHEN) CO LTD				E201757
607 BAOLONG INDUSTRIAL ESTATE LONGGANG, SHENZHEN				
GUANGDONG CHINA				
	Coating Type		ANSI	
Mtl Dsg	BC	TC	Type	TI
UEW/U	Polyurethane	—	—	130
PEW/U	Polyester	—	MW5-C	155°C
PEWH/U	Modified Polyester	—	MW30-C	180
PEW-NY/U	Polyester	Polyamide	MW24-C	155
HAI/U	Polyester(Amide)(Imide)	Polyamideimide	MW35,73	200
UEW-NY/U	Polyurethane	Polyamide	MW80-C	155
			MW28-C	130

Marking: Company name and material designation or marked designation on package or reel, and Recognized Component Mark.

See General Information Preceding These Recognitions

1/3/2001 Underwriters Laboratories Inc. Card 1 of 2



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

01.07.2008



SUPERWORLD ELECTRONICS (S) PTE LTD

PG. 4