



1. CONFIGURATION & DIMENSIONS :

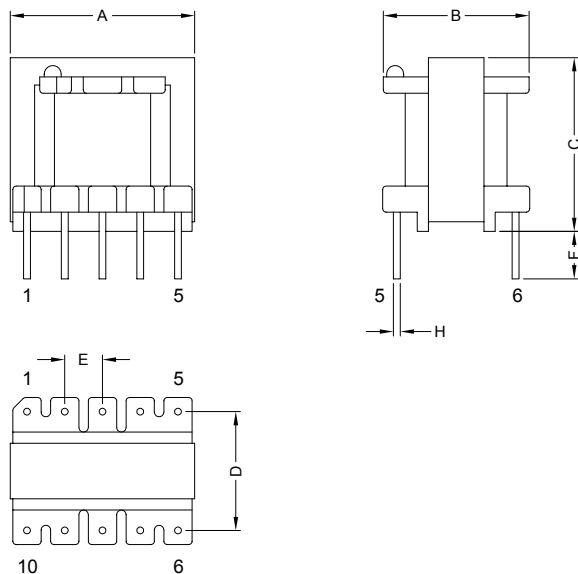

Unit:m/m

A	B	C	D	E	F	H
16.00±1.00	13.00±0.70	17.00 Max.	10.50±0.50	3.25±0.25	3.80±0.70	Ø0.60±0.10

2. SCHEMATIC :

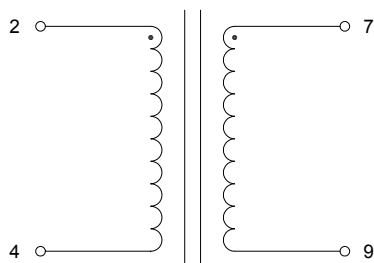

3. SCHEMATIC :

- a) Bobbin : Phenolic
- b) Core : EI16
- c) Wire : Polyurethane (UEW)
- d) Tape : Polyester Film
- e) Tape : Margin Tape
- f) Varnish : Synthite AC-43



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

18.06.2008



SUPERWORLD ELECTRONICS (S) PTE LTD

4. GENERAL SPECIFICATION :

- a) Operating Temperature Range : -25°C to +105°C
- b) Insulation Class : B (130°C)

5. ELECTRICAL CHARACTERISTICS :

Part No.	Inductance (L)	Conditions	Test Frequency	DCR @ 25°C
SEIB6VTF-50725	L : (2-4) = 5mH Min.	-	1KHz 10mV	(2-4) = 10Ω Max.
				(7-9) = 10Ω Max.



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

18.06.2008



SUPERWORLD ELECTRONICS (S) PTE LTD