



# 10SQ030 thru 10SQ100

## SCHOTTKY BARRIER RECTIFIERS


**REVERSE VOLTAGE - 30 to 100Volts**  
**FORWARD CURRENT - 10.0 Amperes**

### FEATURES

- Metal of silicon rectifier , majority carrier conduction
- Guard ring for transient protection
- Low power loss,high efficiency
- High current capability,low VF
- High surge capacity
- For use in low voltage,high frequency inverters,free wheeling,and polarity protection applications

### MECHANICAL DATA

- Case: JEDEC R-6 molded plastic
- Polarity: Color band denotes cathode
- Weight: 0.07 ounces , 2.1 grams
- Mounting position: Any

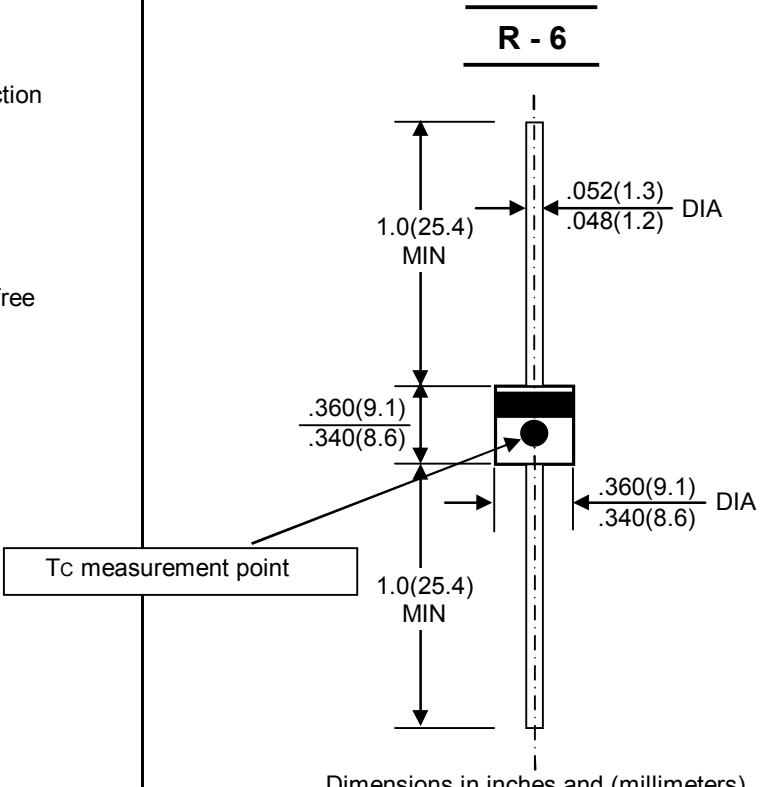

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.  
 Single phase, half wave ,60Hz, resistive or inductive load.  
 For capacitive load, derate current by 20%

CHARACTERISTICS	SYMBOL	10SQ030	10SQ035	10SQ040	10SQ045	10SQ050	10SQ060	10SQ080	10SQ100	UNIT
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	30	35	40	45	50	60	80	100	V
Maximum RMS Voltage	V <sub>RMS</sub>	21	24.5	28	31.5	35	42	56	70	V
Maximum DC Blocking Voltage	V <sub>DC</sub>	30	35	40	45	50	60	80	100	V
Maximum Average Forward Rectified Current @T <sub>c</sub> =95 °C	I(AV)	10								A
Peak Forward Surge Current 8.3ms single half sine-wave super imposed on rated load(JEDEC Method)	I <sub>FSM</sub>	275								A
Peak Forward Voltage at 10A DC(Note1)	V <sub>F</sub>	0.55			0.7		0.8			V
Maximum DC Reverse Current @T <sub>j</sub> =25°C at Rated DC Bolcking Voltage @T <sub>j</sub> =100°C	I <sub>R</sub>	0.5				50				mA
Tyical Junction Capacitance (Note2)	C <sub>J</sub>	450								pF
Tyical Thermal Resistance (Note3)	R <sub>θJC</sub>	3.0								°C/w
Operating Temperature Range	T <sub>J</sub>	-55 to+200								°C
Storage Temperature Range	T <sub>STG</sub>	-55 to+200								°C

- NOTES:1.300us Pulse Width, 2%Duty Cycle.  
 2.Measured at 1.0 MHZ and applied reverse voltage of 4.0VDC.  
 3.Thermal Resistance Junction to case.

# RATING AND CHARACTERISTIC CURVES

## 10SQ030 thru 10SQ100



FIG.1-FORWARD CURRENT DERATING CURVE

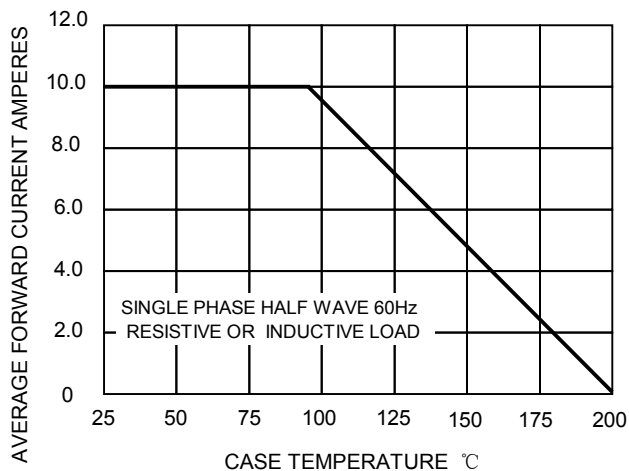


FIG.2-MAXIMUM NON-REPETITIVE SURGE

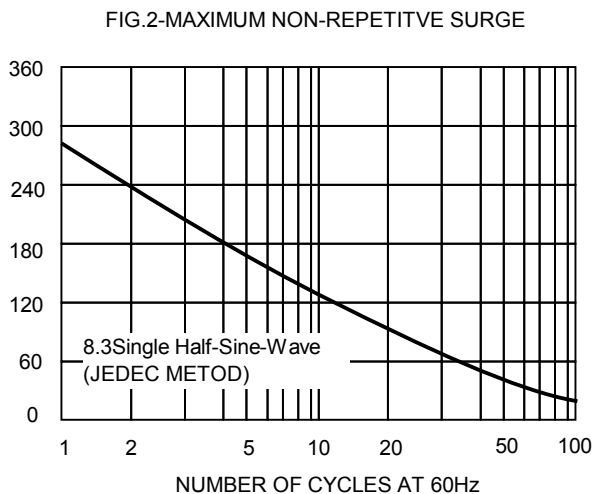


FIG.3-TYPICAL REVER CHARACTERISTICS

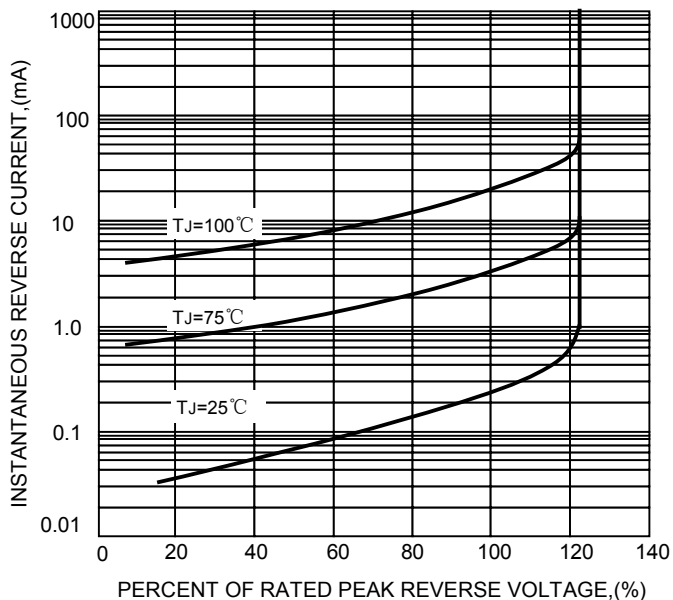


FIG.4-TYPICAL FORWARD CHARACTERISTICS

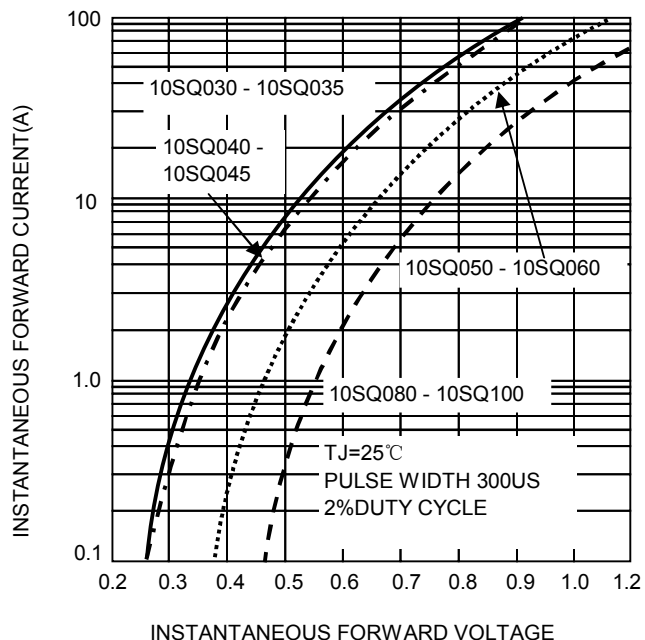


FIG.5-TYPICAL JUNCTION CAPACITANCE

