

MTCH, MTCS, and MTCZ Series




- 11.7 x 9.6 SMD Package
- RoHS Compliant Available
- Voltage Control Option
- Wide Frequency Range

ELECTRICAL SPECIFICATIONS:

Output	HCMOS	Clipped Sinewave	Sinewave
Frequency Range	9.600MHZ to 50.000MHZ		
Load	10k Ohms // 15pF	10k Ohms // 15pF	50 Ohms
Supply Current	35mA max	3mA max	25mA max
Output Level	Logic "1" = 90% of Vdd min Logic "0" = 10% of Vdd max	0.8V p-p min	7 dBm
Symmetry	See Part Number Guide	N/A	N/A
Freq. Stability vs Temp (Note 1)	(See Frequency Stability vs Temperature Table)		
Freq. Stability vs Aging	±1 ppm per year max		
Freq. Stability vs Voltage	±0.3 ppm with a 5% change in Vdd		
Freq. Stability vs Load	±0.3 ppm with a 10% change in Load		
Operature Temperature	(See Frequency Stability vs Temperature Table)		
Storage Temperature	-40°C to +85°C		
Supply Voltage (Vdd)	+3.3VDC ±5%	+5.0VDC ±5%	
Control Voltage with VC option	+1.65VDC ±1.50VDC Positive Slope	+2.50VDC ±2.00VDC Positive Slope	

Pin 1 Connection	
No Connection	No Connection
VC Option	±10 ppm min
Mechanical Trimmer	±3 ppm min

PART NUMBER GUIDE:

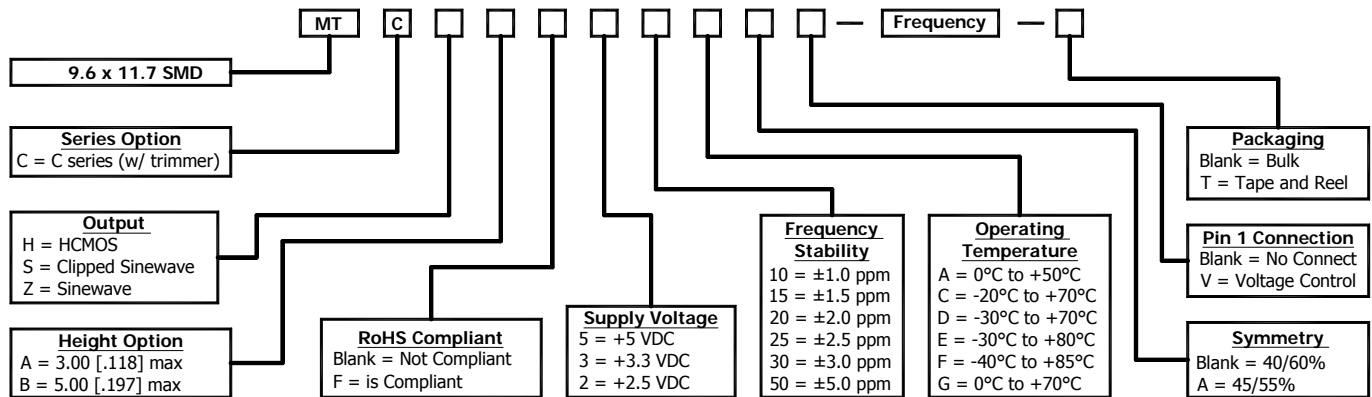

Please Consult with MMD Sales Department for any other Parameters or Options

MMD Components, 30400 Esperanza, Rancho Santa Margarita, CA, 92688
 Phone: (949) 709-5075, Fax: (949) 709-3536, www.mmdcomp.com
 Sales@mmdcomp.com


FREQUENCY STABILITY vs TEMPERATURE TABLE:

Code	Stability	10	15	20	25	30	50
	Temp	±1.0ppm	±1.5ppm	±2.0ppm	±2.5ppm	±3.0ppm	±5.0ppm
A	0°C TO +50°C	●	●	●	●	●	●
G	0°C TO +70°C	□	●	●	●	●	●
C	-20°C TO +70°C	□	□	●	●	●	●
D	-30°C TO +70°C	□	□	□	●	●	●
F	-40°C TO +85°C	□	□	□	●	●	●

● = Available

□ = Consult with the Manufacturer

MECHANICAL DIMENSIONS:


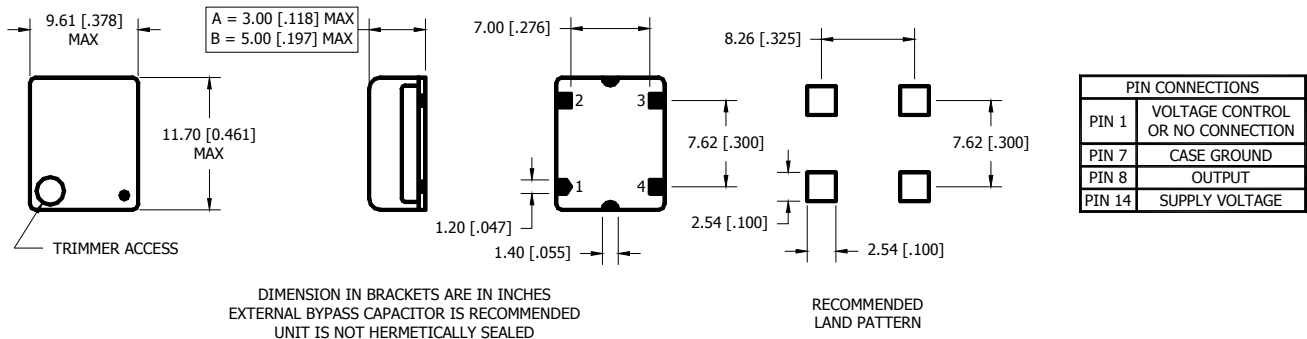


ENVIRONMENT / MECHANICAL:

Shock	MIL-STD-883, Method 2002, Condition B
Solderability	MIL-STD-883, Method 2003
Vibration	MIL-STD-883, Method 2007, Condition A

TAPE and DIMENSIONS:

PHASE NOISE:

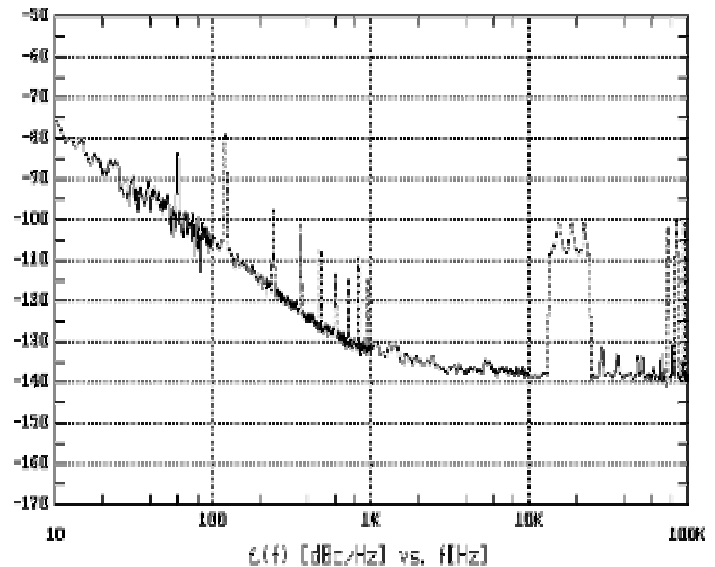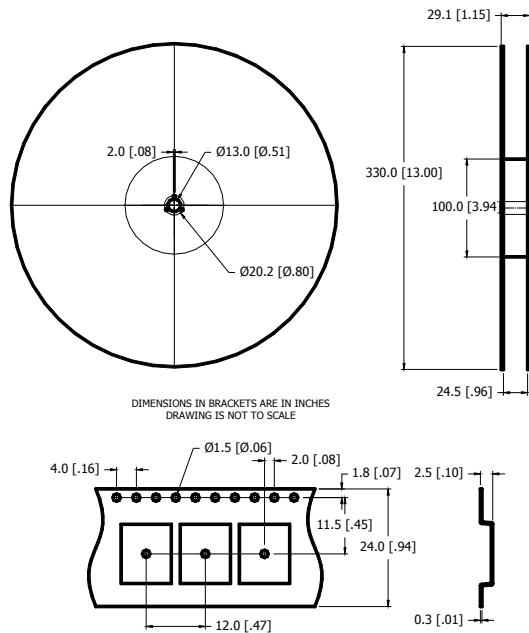

MMD Components, 30400 Esperanza, Rancho Santa Margarita, CA, 92688
 Phone: (949) 709-5075, Fax: (949) 709-3536, www.mmdcomp.com
Sales@mmdcomp.com