

Features

- Low Phase Noise
- Wide Tuning Range
- Divide-by-Two Output
- Integrated Buffer Amplifier
- Excellent Temperature Stability
- +5V Bias Supply
- Lead-Free 5 mm 32-Lead PQFN Package
- 100% Matte Tin Plating over Copper
- Halogen-Free "Green" Mold Compound
- RoHS* Compliant and 260°C Reflow Compatible

Description

The MAOC-009262-PKG003 is an InGaP HBT-based voltage controlled oscillator for frequency generation. No external matching components are required. This VCO is easily integrated into a phase lock loop using the divide-by-two output. The extremely low phase noise makes this part ideal for many radio applications including high capacity digital radios.

The 5 mm PQFN package has a lead-free finish that is RoHS compliant and compatible with a 260°C reflow temperature. The package also features low lead inductance and an excellent thermal path. The MTTF is 1,000,000 hours at a 150°C junction temperature.


Primary Applications

- Point-to-Point Radio
- Point-to-Multipoint Radio
- Communications Systems
- Low Phase Noise Applications

Ordering Information

Part Number	Package
MAOC-009262-TR0500	Tape & Reel, 500 pieces
MAOC-009262-TR1000	Tape & Reel, 1000 pieces
MAOC-009262-SMB003	Sample Board

Block Diagram

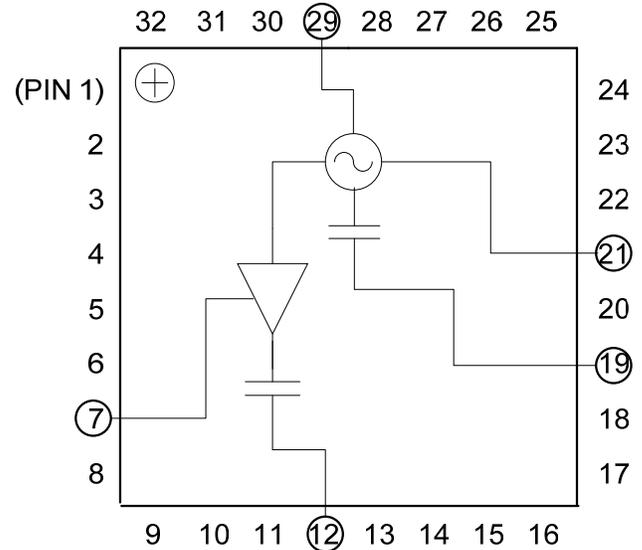

Pin Designations ¹

Pin	Function	Pin	Function
1	N/C	17	N/C
2	N/C	18	N/C
3	N/C	19	F ₀
4	N/C	20	N/C
5	N/C	21	V _{CC}
6	N/C	22	N/C
7	V _{BUFFER}	23	N/C
8	N/C	24	N/C
9	N/C	25	N/C
10	N/C	26	N/C
11	N/C	27	N/C
12	F _{0/2}	28	N/C
13	N/C	29	V _{TUNE}
14	N/C	30	N/C
15	N/C	31	N/C
16	N/C	32	N/C

1. The exposed pad centered on the package bottom must be connected to RF and DC ground.

* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.
PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 / Fax: 978.366.2266
 • **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
 • **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298
 Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

Electrical Specifications: $T_A = +25^\circ\text{C}$, $V_{CC} = 5.0\text{V}$, $Z_L = 50\ \Omega$

Parameter	Min.	Typ.	Max.	Units
Frequency Range	F_o	7.4 - 8.2		GHz
	$F_o/2$	3.7 - 4.1		
Output Power across operating frequency range	RF Port	11		dBm
	RF/2 Port	2.5		
SSB Phase Noise $V_{CC}=V_{BUFFER}=V_{TUNE}=5\text{V}$	RF Port, 10KHz Offset	-90		dBc/Hz
	RF Port, 100KHz Offset	-115		
Tune Voltage	V_{TUNE}	1	13	V
Supply Current	$I_{CC} + I_{BUFFER}$	190		mA
Control Current Leakage	$V_{TUNE}=13\text{V}$	-5		μA
Output Return Loss	RF Port	-5		dB
	RF/2 Port	-7		
Harmonics/Subharmonics $V_{CC}=V_{BUFFER}=V_{TUNE}=5\text{V}$	RF Port, $1/2 F_o$	23		dBc
	RF Port, $3/2 F_o$	43		
	RF Port, $2 F_o$	20		
	RF/2 Port, $2 F_o$	1.7		
	RF/2 Port, $3 F_o$	33		
Pulling (Sensitivity to Match)	RF Port, VSWR = 1.95:1 to 2.25:1 $V_{CC}=V_{BUFFER}=V_{TUNE}=5\text{V}$	8.5		MHz pk-pk
Pushing (Sensitivity to Supply Voltage)	RF Port	7.5		MHz/V
	RF/2 Port	1		
Frequency Drift Rate (Sensitivity to Temperature)	RF Port	.6		MHz/ $^\circ\text{C}$
	RF/2 Port	.3		

Absolute Maximum Ratings^{2,3}

Parameter	Absolute Maximum
V_{CC} (VCO & Buffer)	+6V
Storage Temperature	-55 $^\circ\text{C}$ to +150 $^\circ\text{C}$
Operating Temperature	-40 $^\circ\text{C}$ to +85 $^\circ\text{C}$

- Exceeding any one or combination of these limits may cause permanent damage to this device.
- M/A-COM does not recommend sustained operation near these survivability limits.

Static Sensitivity

Gallium Arsenide Integrated Circuits are sensitive to **Electrostatic Discharge (ESD)** and can be damaged by static electricity. Proper ESD control techniques should be used when handling these devices.



ESD Rating: 200 Volts

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.
PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

- North America** Tel: 800.366.2266 / Fax: 978.366.2266
- Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

Voltage Controlled Oscillator 7.4 - 8.2 GHz

Preliminary: Rev. V2P

Typical Performance Curves: $V_{CC} = 5V$, $T_A = +25^\circ C$ (unless otherwise indicated)

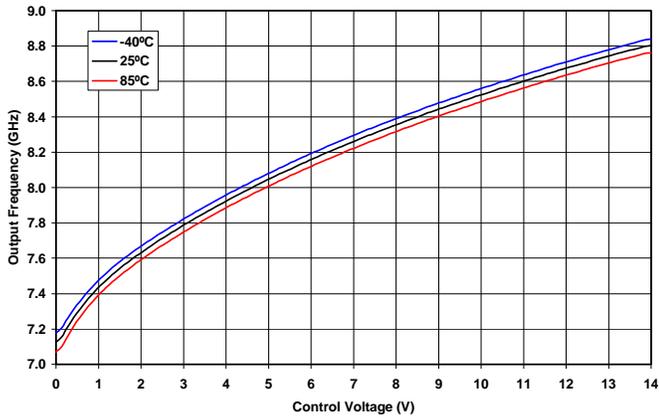


Figure 1: Frequency vs. Control Voltage and Temperature - RF Port

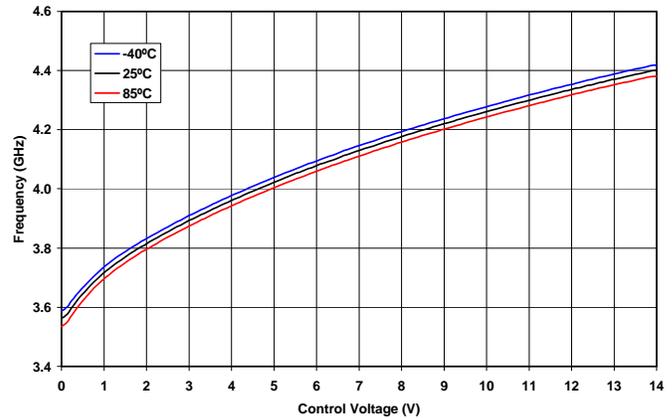


Figure 2: Frequency vs. Control Voltage and Temperature - RF/2 Port



Figure 3: Frequency vs. Control Voltage and Supply Voltage - RF Port

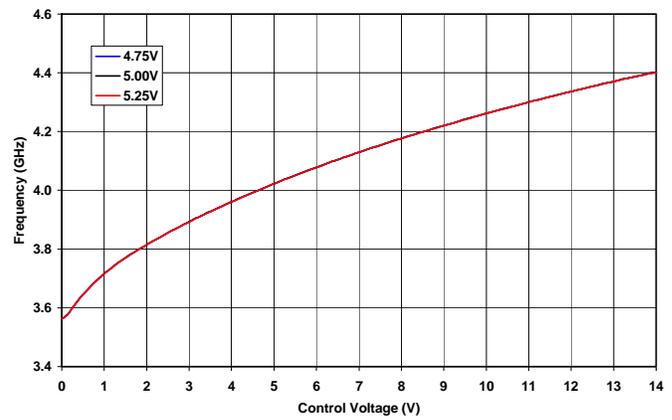


Figure 4: Frequency vs. Control Voltage and Supply Voltage - RF/2 Port

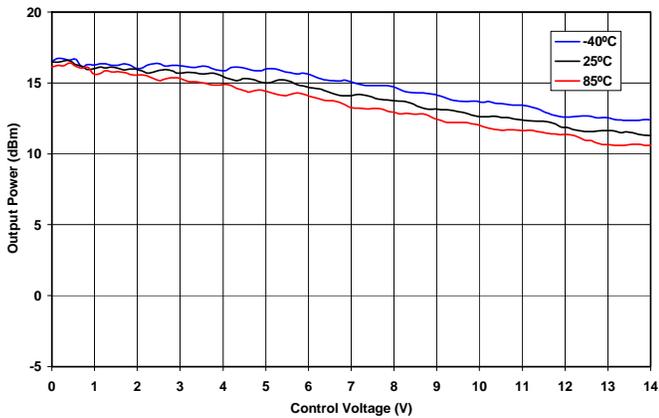


Figure 5: Output Power vs. Control Voltage and Temperature - RF Port

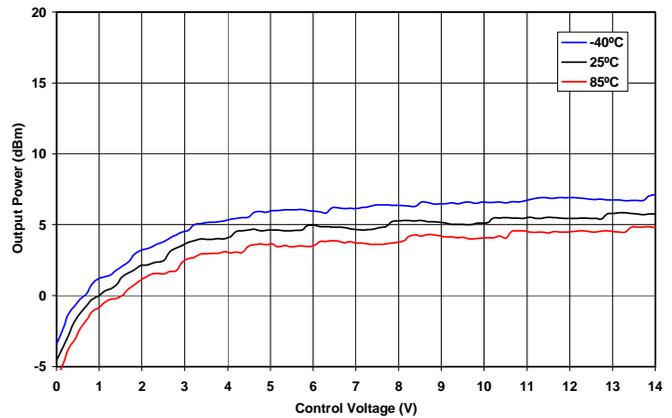


Figure 6: Output Power vs. Control Voltage and Temperature - RF/2 Port

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.
PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
 - **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
 - **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298
- Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

Typical Performance Curves: $V_{CC} = 5\text{ V}$, $T_A = +25\text{ }^\circ\text{C}$ (unless otherwise indicated)

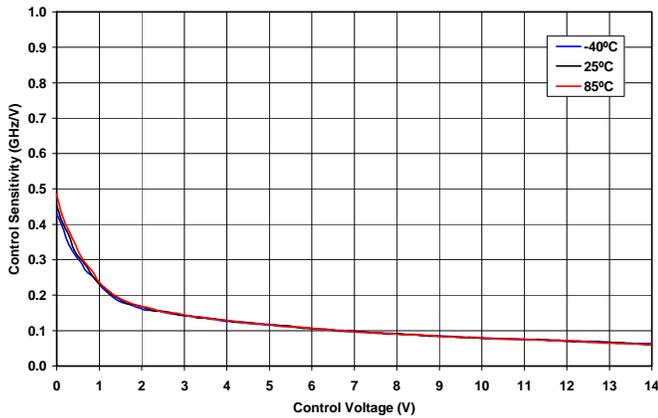


Figure 7: Frequency Sensitivity vs. Control Voltage and Temperature - RF Port

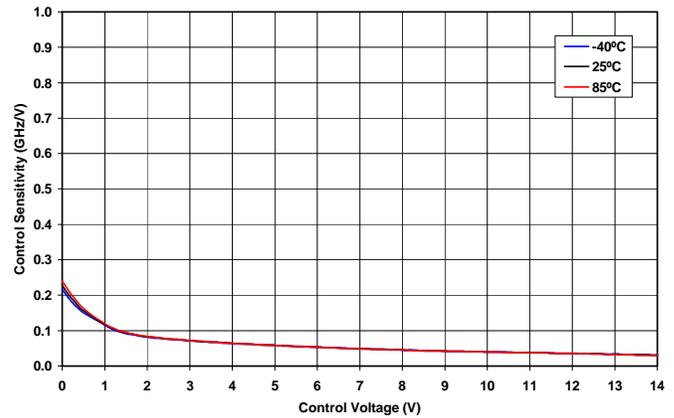


Figure 8: Frequency Sensitivity vs. Control Voltage and Temperature - RF/2 Port

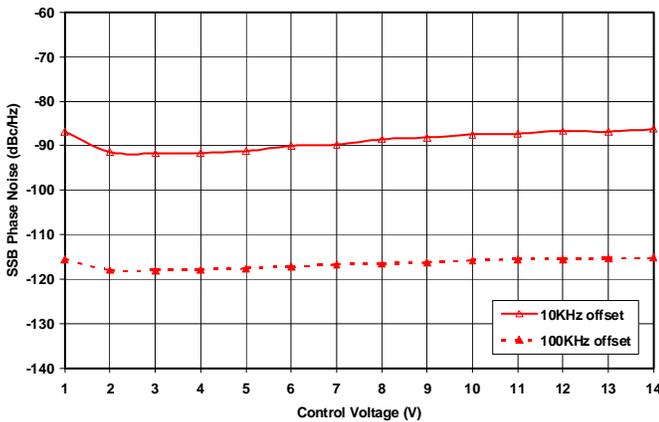


Figure 9: Single Side Band Phase Noise vs. Control Voltage and Offset Frequency

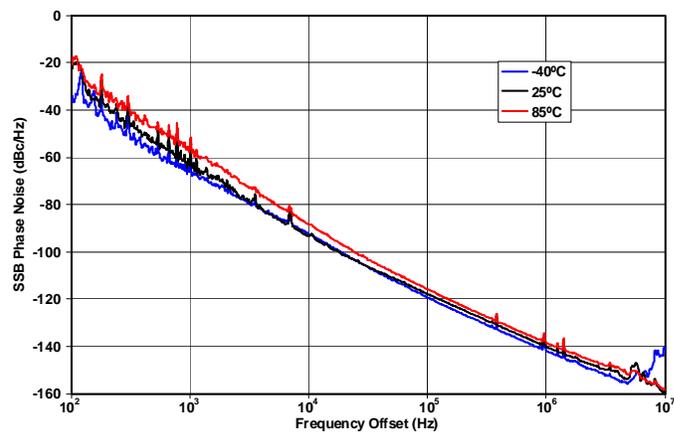


Figure 10: Single Side Band Phase Noise vs. Frequency Offset (Vctrl = 5V)


MAOC-009262-PKG003




Voltage Controlled Oscillator
7.4 - 8.2 GHz

Preliminary: Rev. V2P

Lead Free 5mm 32-Lead PQFN

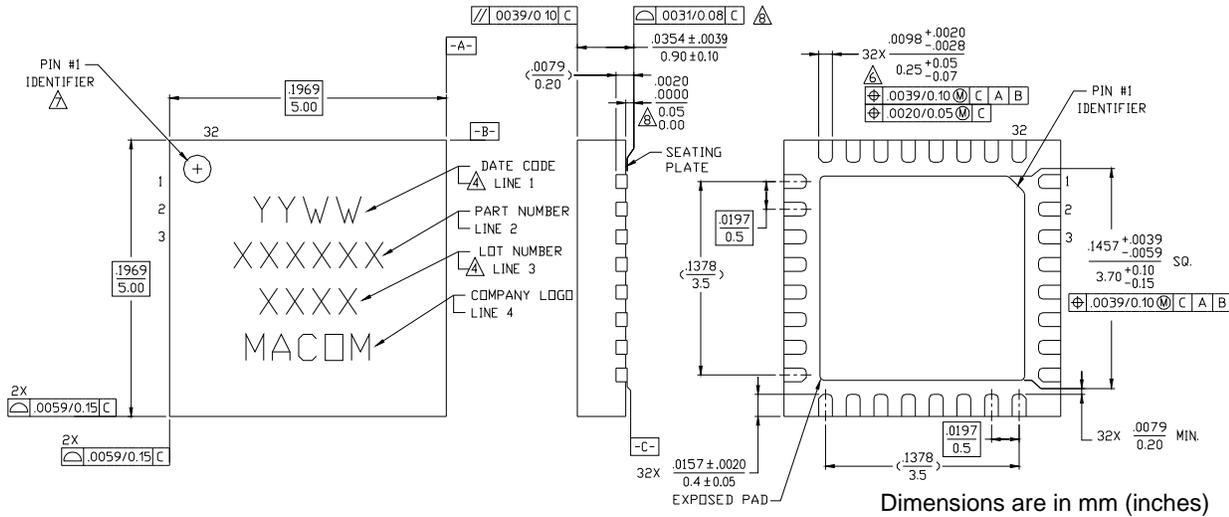

Sample Board

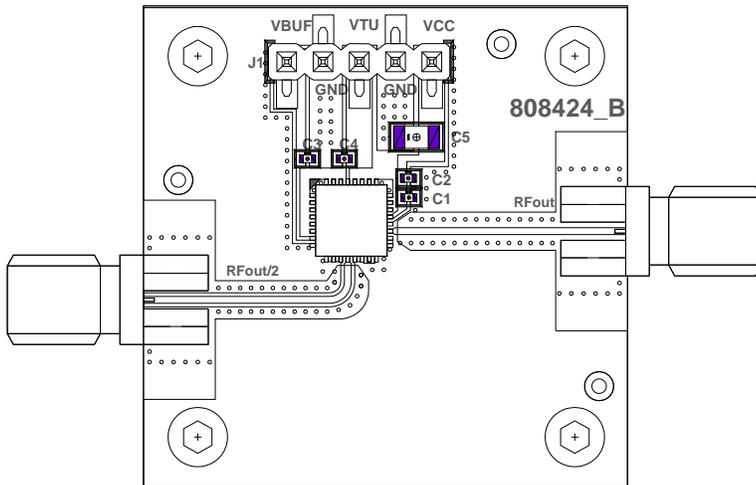

Component	Value	Case Size	Manufacturer
C1, C3, C4	100 pF	0402	Murata
C2	0.1 μF	0402	Murata
C5	10 μF	1206	AVX

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.
PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 / Fax: 978.366.2266
• **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
• **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298
Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.