

# ISDN S-INTERFACE TRANSFORMER

## P/N: S5799M DATA SHEET


### A. GENERAL SPECIFICATIONS

1. SURFACE MOUNT DUAL
2. MEET THE PULSE WAVEFORM TEMPLATE OF CCITT 1.43 WHEN RECOMMENDED
3. 2KVrms ISOLATION VOLTAGE
4. REEL TAPE OR TUBE PACKAGING


### B. ELECTRICAL SPECIFICATIONS @ 25° C

1. TURN RATIO: 1:2
2. OCL INDUCTANCE: 25mH Min @ 10KHz/0.1Vrms
3. L.L: 6uH Max @ 1MHz/0.2Vrms
4. CW/W: 100pF Max 100KHz/0.2Vrms
5. DCR (16-15=14-13=12-11=10-9): 3.5 OHM Max  
(1-2=3-4=5-6=7-8): 1.35 OHM Max
6. HI-POT: 1500Vrms FOR 1.0 MINUTE

### C. SCHEMATICS & DIMENSIONS & MARKING (Unit: m/m)

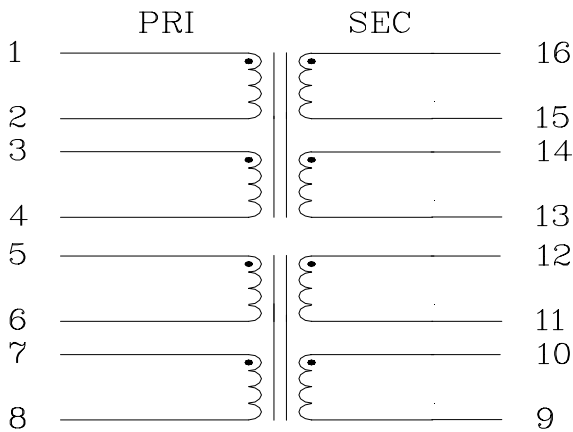

PIN 1 DOT

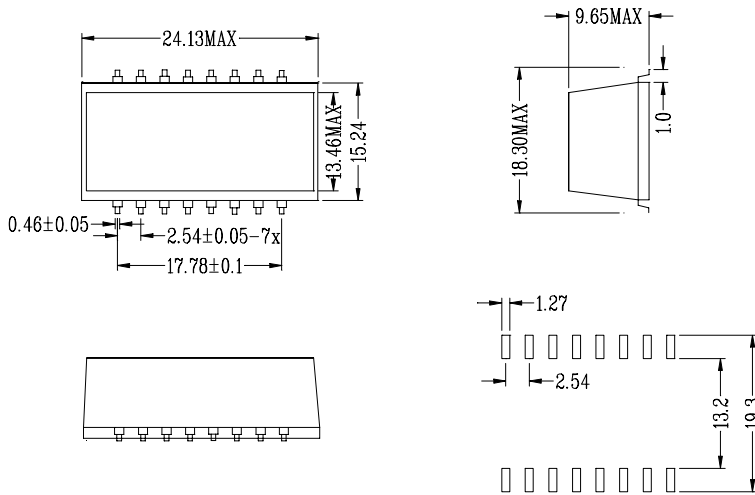

UNIT: mm TOLER: +/-0.25