


SPECIFICATION FOR APPROVAL

REF : 20080527-A


PAGE: 1

PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO. ABC'S ITEM NO.	SQ0703□□□□L□-□□□
---------------	--------------------	---------------------------------	------------------

I . MECHANICAL DIMENSIONS :

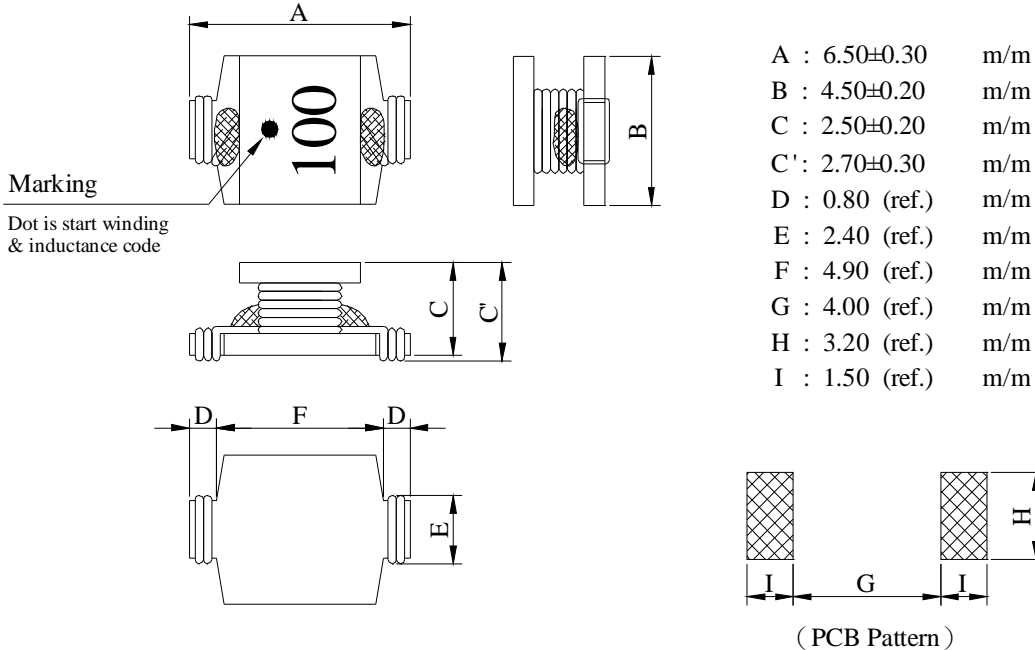


II . SCHEMATIC DIAGRAM :



III . MATERIALS LIST :


- a . Core : Ferrite core
- b . Wire : Enamelled copper wire (class F)
- c . Terminal : Cu / Sn
- d . Adhesive : Epoxy resin
- e . Remark : Products comply with RoHS' requirements



Peak Temp : 260°C max.
Max time above 230°C : 50sec max.
Max time above 200°C : 70sec max.

IV . GENERAL SPECIFICATION :

- a . Temp. rise : 20°C max.
- b . Storage temp. : -40°C ----+125°C
- c . Operating temp. : -40°C ----+105°C
- d . Rated current (Irms)
Current cause inductance drop within 10%
- e . Resistance to solder heat : 260°C .10 secs.

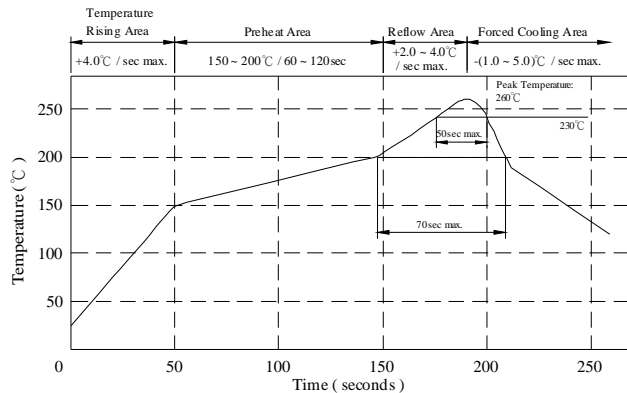

AR-001A

SPECIFICATION FOR APPROVAL

REF : 20080527-A

PAGE: 2

PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO.	SQ0703□□□□L□-□□□
		ABC'S ITEM NO.	

V . ELECTRICAL CHARACTERISTICS :

DWG No.	Inductance (μH)	Q ref.	Test Freq (MHz)		SRF (MHz) nom.	RDC (Ω) max.	Irms 1 (mA)max. $\Delta T=20^{\circ}C$	Irms 2 (mA)max. $\Delta T=40^{\circ}C$
			L	Q				
SQ07031R0ML□-□□□	1.00±20%	25	100K/0.1V	7.96	160.0	0.042	2200	3200
SQ07031R2ML□-□□□	1.20±20%	25	100K/0.1V	7.96	145.0	0.047	2000	3000
SQ07031R8ML□-□□□	1.80±20%	25	100K/0.1V	7.96	105.0	0.052	1900	2700
SQ07032R2ML□-□□□	2.20±20%	24	100K/0.1V	7.96	95.0	0.060	1800	2600
SQ07032R7ML□-□□□	2.70±20%	23	100K/0.1V	7.96	80.0	0.065	1700	2500
SQ07033R3ML□-□□□	3.30±20%	23	100K/0.1V	7.96	65.0	0.075	1650	2350
SQ07033R9ML□-□□□	3.90±20%	22	100K/0.1V	7.96	70.0	0.080	1580	2250
SQ07034R7ML□-□□□	4.70±20%	20	100K/0.1V	7.96	60.0	0.100	1500	2100
SQ07035R6ML□-□□□	5.60±20%	20	100K/0.1V	7.96	56.0	0.105	1400	2000
SQ07036R8ML□-□□□	6.80±20%	20	100K/0.1V	7.96	45.0	0.115	1300	1900
SQ07038R2ML□-□□□	8.20±20%	20	100K/0.1V	7.96	40.0	0.150	1100	1500
SQ0703100KL□-□□□	10.00±10%	23	100K/0.1V	2.52	36.0	0.170	1000	1400
SQ0703120KL□-□□□	12.00±10%	20	100K/0.1V	2.52	36.0	0.180	900	1300
SQ0703150KL□-□□□	15.00±10%	23	100K/0.1V	2.52	30.0	0.240	750	1120
SQ0703180KL□-□□□	18.00±10%	20	100K/0.1V	2.52	30.0	0.280	700	1050
SQ0703220KL□-□□□	22.00±10%	20	100K/0.1V	2.52	26.0	0.300	650	950
SQ0703270KL□-□□□	27.00±10%	20	100K/0.1V	2.52	20.0	0.400	600	880
SQ0703330KL□-□□□	33.00±10%	17	100K/0.1V	2.52	20.0	0.450	560	820
SQ0703390KL□-□□□	39.00±10%	18	100K/0.1V	2.52	18.0	0.550	500	730
SQ0703470KL□-□□□	47.00±10%	20	100K/0.1V	2.52	15.0	0.720	400	640
SQ0703560KL□-□□□	56.00±10%	20	100K/0.1V	2.52	13.0	0.800	390	600
SQ0703680KL□-□□□	68.00±10%	18	100K/0.1V	2.52	13.0	0.900	380	560
SQ0703820KL□-□□□	82.00±10%	18	100K/0.1V	2.52	12.0	1.180	330	470
SQ0703101KL□-□□□	100.00±10%	33	100K/0.1V	0.796	11.0	1.560	270	400
SQ0703121KL□-□□□	120.00±10%	32	100K/0.1V	0.796	10.0	1.750	260	365
SQ0703151KL□-□□□	150.00±10%	30	100K/0.1V	0.796	9.0	2.000	250	340
SQ0703181KL□-□□□	180.00±10%	33	100K/0.1V	0.796	7.0	2.700	190	300
SQ0703221KL□-□□□	220.00±10%	31	100K/0.1V	0.796	7.0	3.000	180	280
SQ0703271KL□-□□□	270.00±10%	30	100K/0.1V	0.796	7.0	3.600	170	250
SQ0703331KL□-□□□	330.00±10%	33	100K/0.1V	0.796	6.0	4.800	160	220
SQ0703391KL□-□□□	390.00±10%	36	100K/0.1V	0.796	5.5	6.200	140	190
SQ0703471KL□-□□□	470.00±10%	33	100K/0.1V	0.796	5.0	7.000	130	180
SQ0703561KL□-□□□	560.00±10%	36	100K/0.1V	0.796	4.2	9.200	110	155
SQ0703681KL□-□□□	680.00±10%	32	100K/0.1V	0.796	4.0	10.500	100	145
SQ0703821KL□-□□□	820.00±10%	32	100K/0.1V	0.796	3.6	12.000	90	135
SQ0703102KL□-□□□	1000.00±10%	30	100K/0.1V	0.252	3.2	14.200	80	125

- 1). □ : Packaging information... [A]: Bulk [B]: Taping Reel
- 2). "- □□□ ":Reference code
- 3). Irms base on Temp. rise 20°C max.
- 4). Isat base on Temp. rise 40°C max.

AR-001A




SPECIFICATION FOR APPROVAL

REF : 20080527-A


PAGE: 3

PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO.	SQ0703□□□□L□-□□□
		ABC'S ITEM NO.	

VI . INDUCTANCE VS. DC CURRENT CURVE :

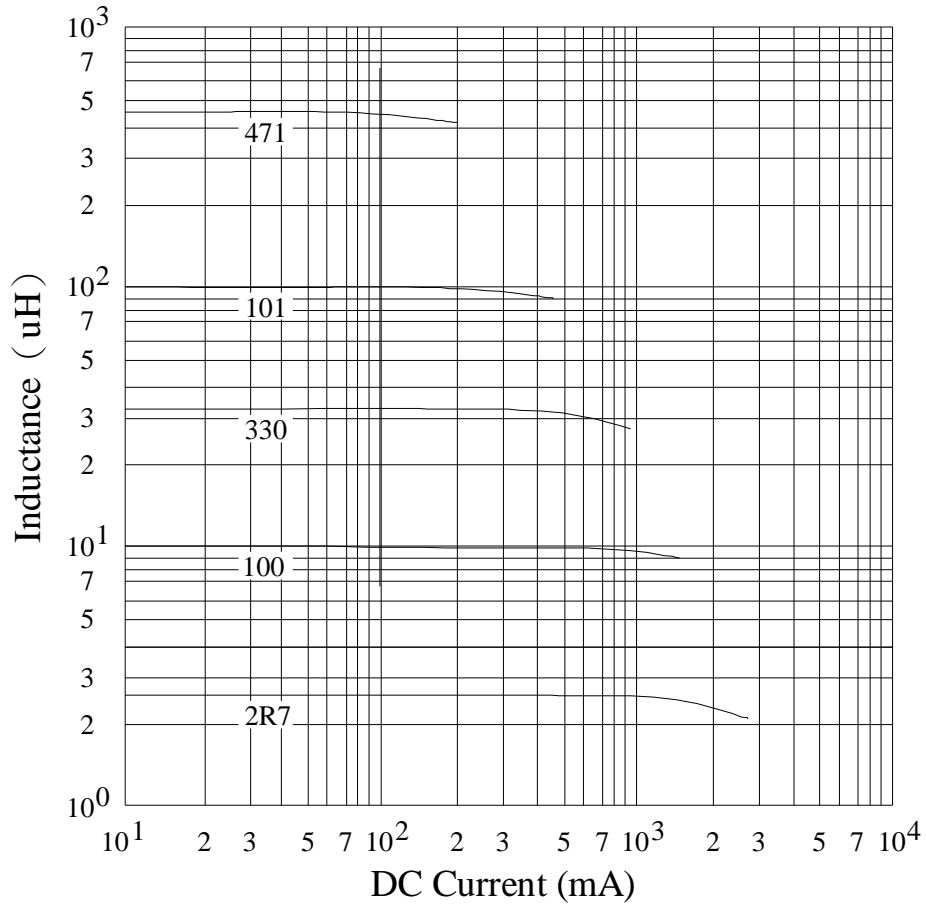

AR-001A



SPECIFICATION FOR APPROVAL


REF : 20080527-A

PAGE: 4


PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO.	SQ0703□□□□L□-□□□
		ABC'S ITEM NO.	

VII . PACKAGING INFORMATION :

(1) Configuration

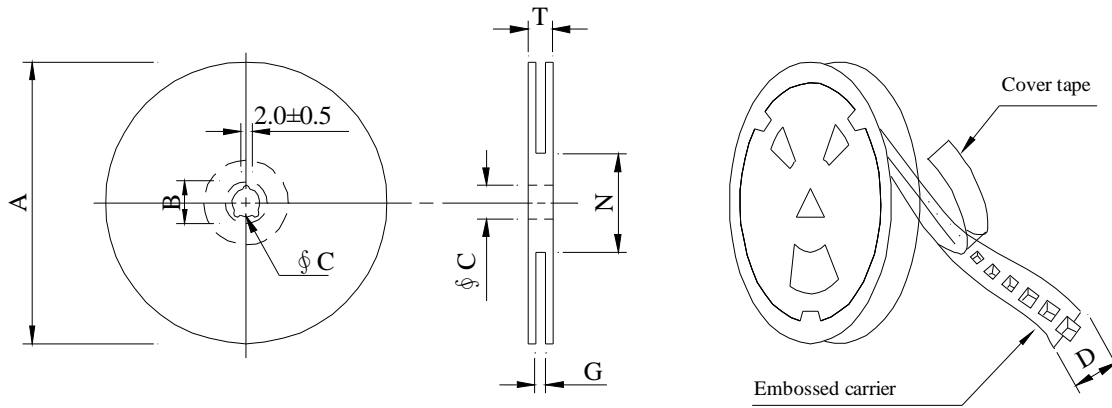

※Carrier tape width : D

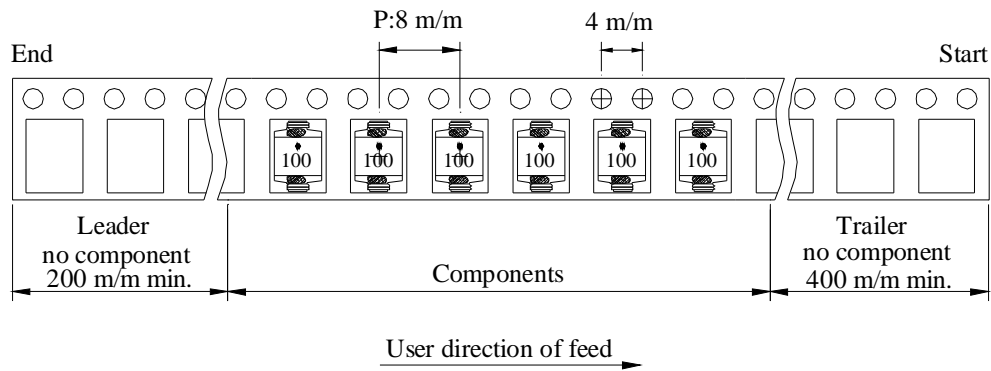

(2) Dimensions

Unit:m/m

Style	A	B	C	D	G	N	T
07 - 12	178	21±0.8	13±0.5	12	14 ⁺⁰	50 ⁻⁰	18.4
13 - 12	330	21±0.8	13±0.5	12	14 ⁺⁰	50 ⁻⁰	18.4

(3) QTY & G.W. Per package

Series	Inner : Reel			Outer : Carton		
	QTY (pcs)	G.W. (gw)	Style	QTY (pcs)	G.W. (Kg)	Size (cm)
SQ0703	500	350	07 - 12	20,000	10.5	42 x 41 x 24
SQ0703	2,000	1300	13 - 12	16,000	13.0	40 x 40 x 24


AR-001A

千如電子集團
 ABC ELECTRONICS GROUP.

SPECIFICATION FOR APPROVAL

PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO.	SQ0703□□□□L□-□□□
		ABC'S ITEM NO.	

VIII . DWGING NUMBER EXPRESSION :

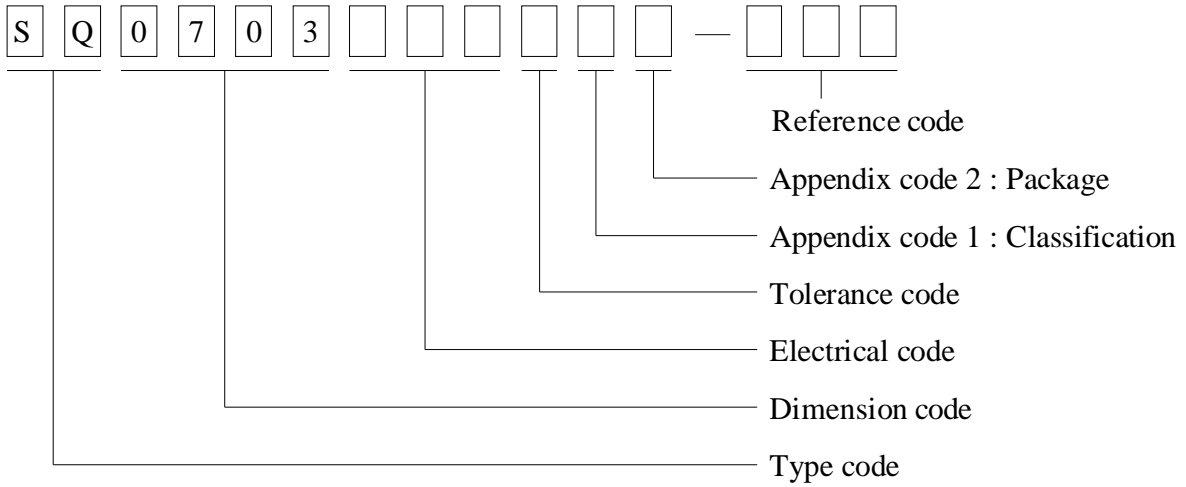

Appendix code 1 : Product Classification

- L : Lead Free Standard products comply with RoHS' requirements
- 1 ~ 9 : Lead Free Special products comply with RoHS' requirements

Appendix code 2 : Package Information

Code	Inner package	Inner package Q'TY	Remark
A	T.B.D.	T.B.D.	
B	T /R (Reel package)	500 pcs	
C	T /R (Reel package)	2000 pcs	
D	T /R (Reel package)	500 pcs	Hot-press Type
E	T /R (Reel package)	500 pcs	UCT Type

SPECIFICATION FOR APPROVAL

REF : 20080527-A

PAGE: 6

PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO. ABC'S ITEM NO.	SQ0703□□□□L□-□□□
---------------	--------------------	---------------------------------	------------------

IX . RELIABILITY TEST :

Test item	Specification	Test condition						
Solderability	More than 95% of the terminal electrode shall be covered With fresh solder.	Preheat : 155°C / 4 hours. Solder : Sn96.5 / Ag3 / Cu0.5 or equivalent Solder temp. : 235±5°C Flux : Rosin Dip time : 5±0.5 seconds						
Thermal shock test (Temp. cycle)	Electrical oharacteristics shall not change more than ±20%	<table style="width: 100%; border: none;"> <tr> <td style="border: none;">Room temp. 15 minutes</td> <td style="border: none; text-align: center;">→</td> <td style="border: none; text-align: center;">-40 °C 30 minutes</td> </tr> <tr> <td style="border: none;">Room temp. 15 minutes</td> <td style="border: none; text-align: center;">→</td> <td style="border: none; text-align: center;">+105 °C 30 minutes</td> </tr> </table> <p>Total : 50 cycles</p>	Room temp. 15 minutes	→	-40 °C 30 minutes	Room temp. 15 minutes	→	+105 °C 30 minutes
Room temp. 15 minutes	→	-40 °C 30 minutes						
Room temp. 15 minutes	→	+105 °C 30 minutes						
Humidity test		Temperature : 40±2°C Humidity : 90±5% Time : 1000 hours						
High temp. Resistance test		Temperature : 105±5°C Applied current : Per spec. Time : 96 hours						

AR-001A



