

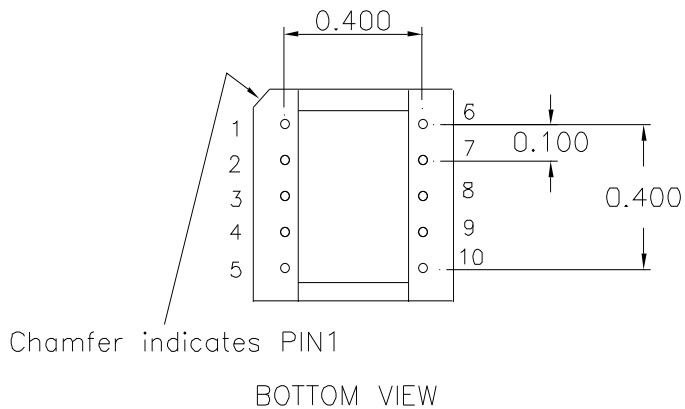
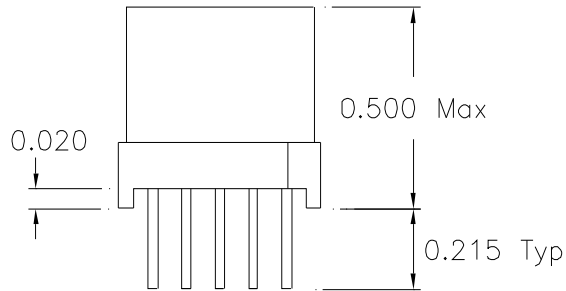


1. Mechanical Dimensions:



2. Schematic:

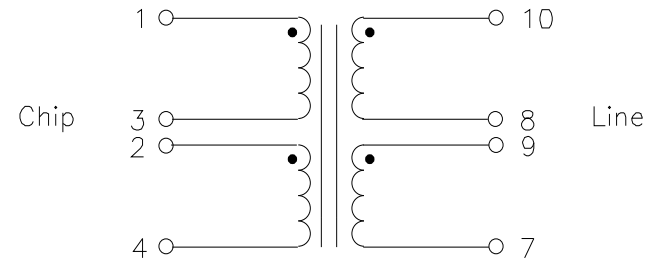

3. Electrical Specifications:

- Turns Ratio : 1:1.27 ±1% (Chip:Line)
- Isolation Voltage: 2000VAC (Chip-Line)
- Leakage L (1-4): 12uH Max. @10KHz , 0.1V Short 10-7
- OCL (1-4): 17.6mH Min. @10KHz ,1.0V
- DCR (1-3): .410 Ohms ±15%
- DCR (2-4): .410 Ohms ±15%
- DCR (10-8): .650 Ohms ±15%
- DCR (9-7): .650 Ohms ±15%
- Insertion Loss: 0.15dB Max 100KHz
- Freq. Resp.: ±0.55dB 30Khz-1.1MHz
- Long. Bal.: 40dB Min 1KHz-1MHz
- THD: -90dB Max 40KHz

XFMRS	Title: TRANSFORMER	
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH	P/N: XFADSL10
		REV. A
		May-13-99
	DWN.	李清儿
	CHK.	孙,悦
	APP.	Joe Huff
Scale 1.5:1 SHT 1 OF 1		May-13-99

DOC. REV A/2