


NETWORKING SOCKETS

- LEDs within socket
- Shielded and Unshielded RJ45 available
- Bi Colours available
- Wide range of colours


LED LIGHT JACKS

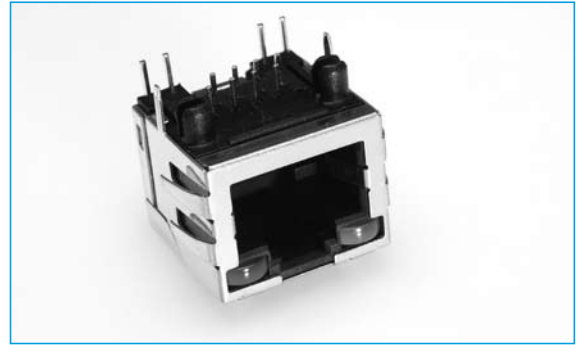

SPECIFICATION

Current Rating	3A
Contact Resistance	30mΩ max at DC 100mA
Dielectric withstanding Voltage	AC 500V for 1 minute
Insulation Resistance	1000mΩ min at DC 500V
Plating	Gold plating over Nickel Tin plate over nickel in solder area
Housing	Thermoplastic (UL94V-0)
Contact	0.35mm Phosphor Bronze
Operating Temperature	-55 °C to +105 °C

OUTLINE DRAWING

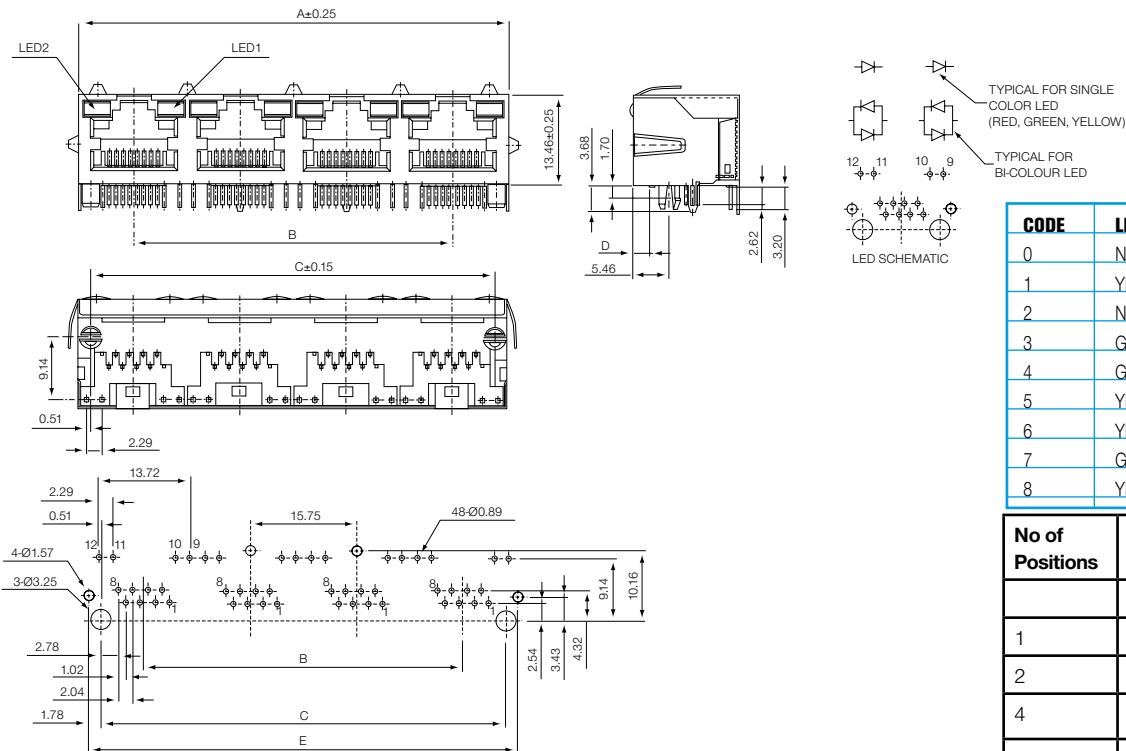

CODE	LED2 (Left)	LED1 (Right)
0	NO LED	NO LED
1	YELLOW	GREEN
2	NO LED	GREEN
3	GREEN	YELLOW
4	GREEN	GREEN
5	YELLOW	YELLOW
6	YELLOW/GREEN	YELLOW/GREEN
7	GREEN/RED	GREEN/RED
8	YELLOW/GREEN	YELLOW

No of Positions	Dimensions			
	A	B	C	D
1	15.91		12.70	2.25
2	31.66	15.75	28.45	2.37
4	63.16	47.25	59.94	2.37
6	94.66	78.75	91.45	2.37
8	126.16	110.25	122.94	2.37

ORDERING INFORMATION

DBC	RJ	S	2	4	1	2
Dubilier Connectors	Series	Contact Type S = Socket	No. of Ports 1 = 1 port 2 = 2 ports 4 = 4 ports 8 = 8 ports	LED Colour See table above	Contact Plating 1 = 6μ" 2 = 50μ"	Shielding 1 = Unshielded 2 = Shielded