

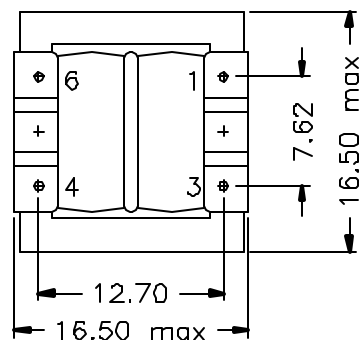



1. Mechanical Dimensions:



(BOTTOM VIEW)

2. Schematic:

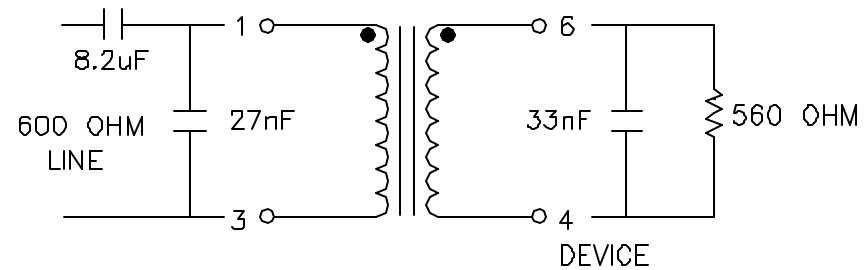

3. Electrical Specifications:

IMPEDENCE: Designed to reflect 600 ohms on PRI with 560 ohms load on SEC.

TURN RATIO: 1:1 $\pm 1\%$ (PIN1-3 : PIN6-4).

DCR (PIN1-3): 65 $\pm 8\%$ OHMS.

DCR (PIN6-4): 65 $\pm 8\%$ OHMS.

OCL (PIN1-3) 4.8H Min. @120Hz,20mV,PARALLEL.

INSERTION LOSS: 1.15dB Typ. @1KHz,1.0V.

RETURN LOSS: 15dB Min. 300-4000Hz (REF. 600 OHMS).

FREQ. RESPONSE: ± 0.20 dB 300-4000Hz (REF. 1KHz).

HI-POT: 3750VAC (PIN1-6).

DOC. REV: C/1

XFMRS Inc		Title: MODEM TRANSFORMER	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ± 0.20 Dimensions in MM	P/N: XF16P-019A		REV. C
	DWN.	李清儿	Feb-05-99
	CHK.	孙小松	Feb-05-99
SHEET 1 OF 1	APP.	Joe Huff	Feb-05-99