

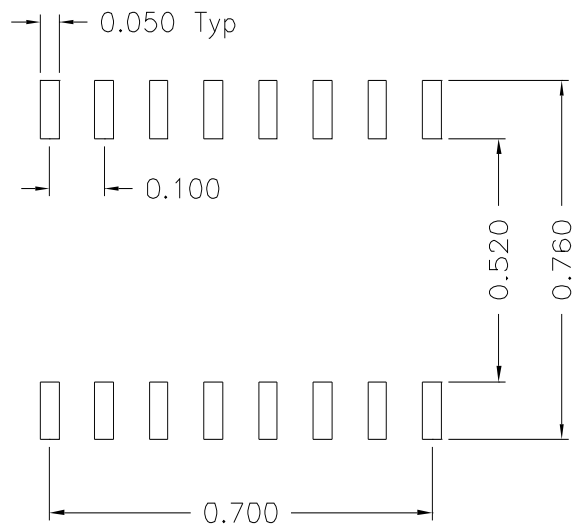
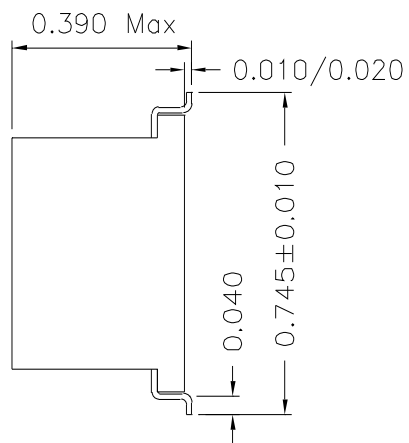


1. Dimensions:

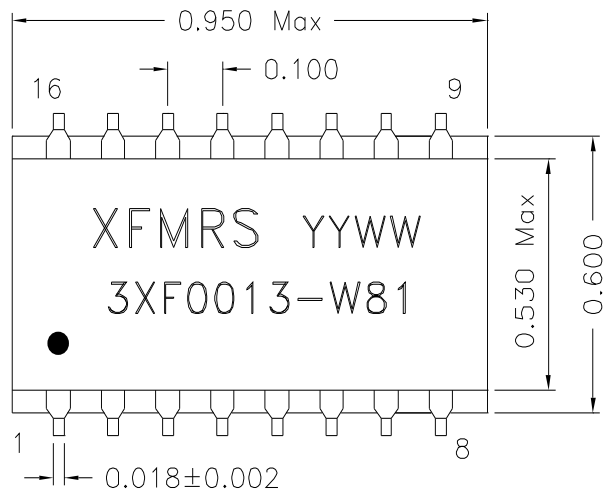

SUGGESTED PCB LAYOUT

2. Schematic:

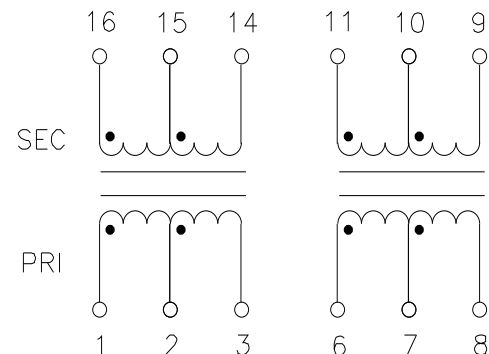

3. Electrical Specifications @25°C

TURN RATIO: P1-2-3:P16-15-14 1CT:1CT±5%
 TURN RATIO: P6-7-8:P11-10-9 1CT:1.5CT±5%
 OCL: P1-3,P6-8 1.2 mH Min @100KHz 0.1V
 LL: P1-3 0.5uH Max @100KHz 0.1V
 LL: P6-8 0.8uH Max @100KHz 0.1V
 CW/W: P1-16 15pF Max @100KHz 0.1V
 CW/W: P6-11 15pF Max @100KHz 0.1V
 DCR: P1-3,P6-8 1.0 Ohms Max
 DCR: P16-14 1.10 Ohms Max
 DCR: P9-11 1.55 Ohms Max
 HIPOT: 3000Vrms

Designed to meet UL1950 specifications for Reinforced Insulation

XFMRS Inc	Title: Dual T1/CEPT/ISDN-Pri Reinforced Ins 3KV SM		
	UNLESS OTHERWISE SPECIFIED	P/N: 3XF0013-W81	REV. A
TOLERANCES: .xxx ±0.010	DWN.	李清儿	Jun-11-99
Dimensions in Inch	CHK.	孙小忠	Jun-11-99
SHEET 1 OF 1	APP.	Joe Huff	Jun-11-99

DOC. REV A/1

THIS DOCUMENT IS STRICTLY NOT ALLOWED TO BE DUPLICATED WITHOUT AUTHORIZATION