



1. Mechanical Dimensions:

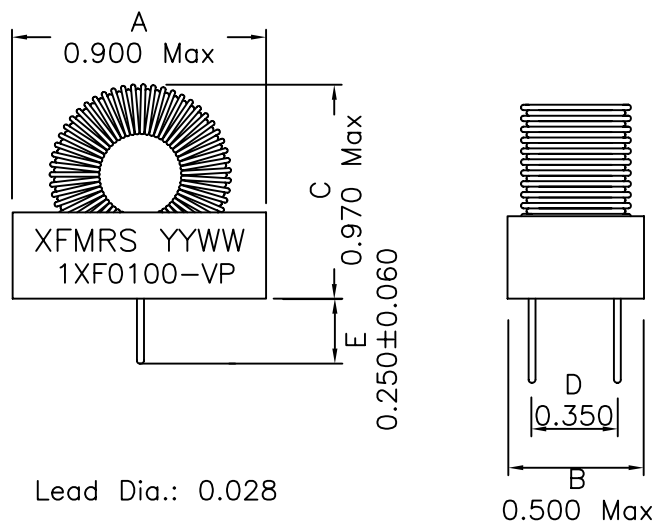

2. Schematic:



3. Electrical Specifications:

Inductance: 115uH±10% @1KHz, 1.0V
 DC Resistance: 0.070 Ohms Max
 Rated Current: 2.0Adc

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: -40°C to +85°C

DOC. REV. B/3

XFMRS Inc.	Title: VERTICAL INDUCTOR		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in Inch	P/N: 1XF0100-VP	REV. A
	DWN.	廖玉坤	Apr-15-03
	CHK.	李清儿	Apr-15-03
	APP.	BW	Apr-15-03