



1. Mechanical Dimensions:

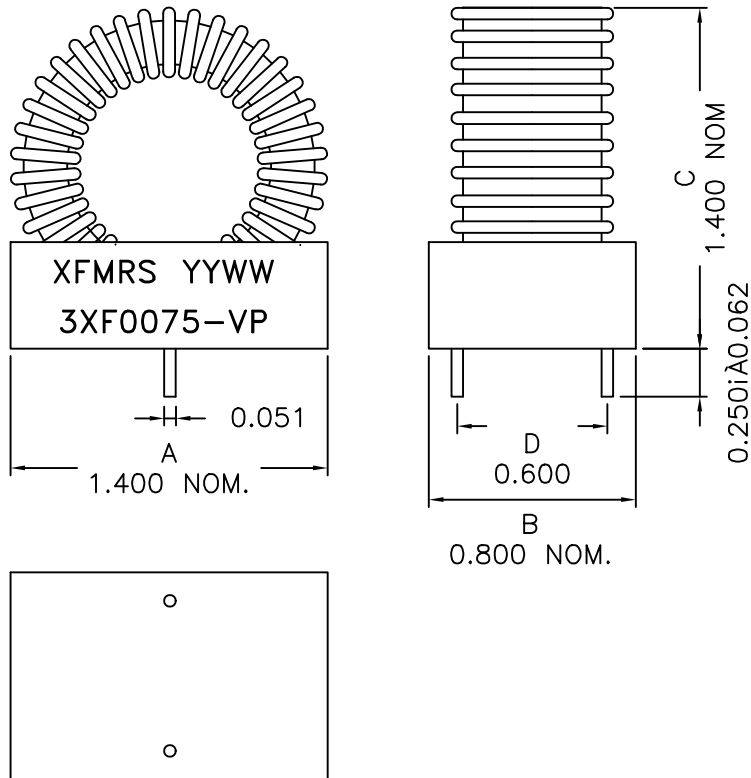

2. Schematic:



3. Electrical Specifications: @25°C

OCL: 75.0uH±15% @10KHz 0.1V
 DC Resistance: 0.020 Ohms Maximum
 OCL: 50uH Typical @ 6ADC

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Temperature rating: 155°C. UL file E151556
5. Operating Temperature Range: 0°C to +70°C

DOC. REV A/3

XFMRs Inc	Title: TOROIDAL INDUCTOR		
	UNLESS OTHERWISE SPECIFIED		P/N: 3XF0075-VP
TOLERANCES:		REV A	
.xxx ±0.010		DWN.	李小锋 JUN-11-01
Dimensions in INCH		CHK.	廖玉坤 JUN-11-01
SHEET 1 OF 1	APP.	Joe Huff	JUN-11-01