

## TERMINAL BLOCKS

- 5.08mm pitch
- Professional rising clamp
- 4.00mm<sup>2</sup> wire acceptance
- Rating 24A / 450V
- CE approved
- Colour green
- Interlocking

## 5.08mm PITCH VERTICAL MOUNT




## SPECIFICATION

**Rating:** 24A/450V  
**Dielectric Strength:** >2.5KV  
**Insulation Resistance:** >5MΩ  
**Working temperature:** -20°C to 125°C  
**Short Period:** 160°  
**Moulding:** UL94V-0 flame retardant nylon 66(Green)

**Pin/terminal:** 5 micron tinned nickel plated brass  
**Rising clamp:** Nickel plated brass  
**Screw/torque:** M3 steel/0.5Nm 7 micron zinc colour passivated and tropicalised  
**Recommended PCB hole size:** ø1.3mm

## OUTLINE DRAWING

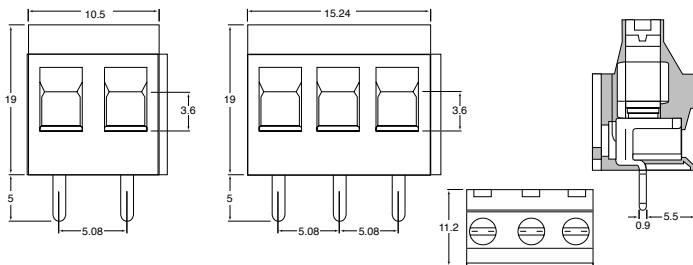

## ORDERING INFORMATION

DBC	TB	15	/2
Dubilier Connectors	Series Terminal Block	Style	N° of Ways
			2 = 2 ways 3 = 3 ways
<small>* Other Number of ways are available up to 24 Please consult office for further details</small>			

## TERMINAL BLOCKS

- 5.08mm pitch
- Professional rising clamp  
- Designed to prevent cable entry below clamp
- 2.5mm<sup>2</sup> wire acceptance
- UL/ CE approved
- Colour green
- Interlocking

## 5.08mm PITCH VERTICAL MOUNT




## SPECIFICATION

**Rating:** 20A/250V  
**Dielectric Strength:** 2.5kV  
**Insulation Resistance:** >5MΩ  
**Working temperature:** -20°C to 125°C  
**Moulding:** UL94V-0 Polyamide 68  
**Pin/terminal:** 5 micron tinned nickel plated brass

**Pin Terminal:** 5 micron tinned nickel plated brass  
**Rising clamp:** Nickel plated brass  
**Screw/torque:** M3 Zinc Steel, colour passivated and tropicalised/0.5NM  
**Recommended PCB hole size:** ø1.3mm<sup>2</sup>

## OUTLINE DRAWING

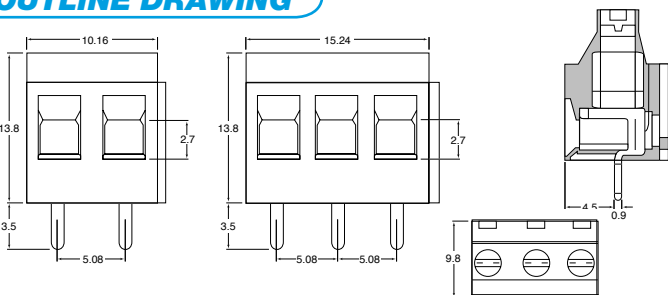

## ORDERING INFORMATION

DBC	TB	17	/2
Dubilier Connectors	Series Terminal Block	Style	N° of Ways
			2 = 2 ways 3 = 3 ways