


PIN HEADERS

- Industry Compatible
- Competitively priced
- Various plated contacts available
- 2.54mm pitch
- Various pin lengths available

DUAL BODY SINGLE ROW

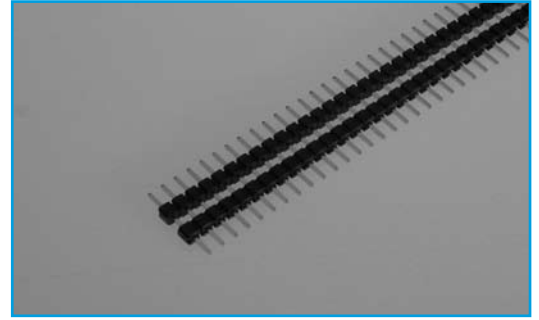

SECTION 8


SPECIFICATION

Material & Finish


Contact Material:	Brass
Insulator Material:	PBT & Glass-Fibre Reinforced UL94V-0
Current Rating:	1 A DC
Contact Resistance:	30M Ω Max at 6V DC 0.3A
Insulator Resistance:	1000M Ω Min at 500V DC
Dielectric Withstanding	
Voltage:	500V AC for One Minute

Operating Temperature: -40°C to + 105°C

OUTLINE DRAWING

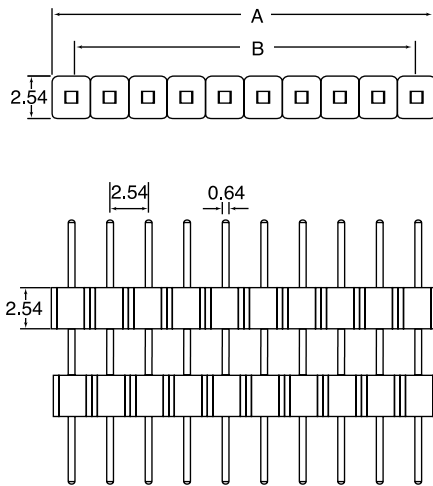

A	2.54 * Position No.
B	2.54 * (Position No.-1)



ORDERING INFORMATION

DBC	PH	C19	32	A	G	1	-XXX
Dubilier Connectors	Pin Header Connector	Series	No. of Ways	Contact Material	Contact Plating	Colour	Unique Special Code
			02= 2ways Thro to 40 = 40ways	A= Brass	G= Gold Flash T= Tin Plated S= Selective	1= Black	*See below

*Dubilier will allocate a special code to distinguish the pins lengths E, F, H and G