



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Approval Sheet For Product Specification

Issued Date:

Product Name: SAW Filter 611MHz SMD 9.1x7.1mm

TST Parts No.:TA0326A

Customer Parts No.: _____

Company: _____
Division: _____
Approved by : _____
Date: _____

Checked by: _____ Bob Chau

Approval by: _____ Francis Chen

Date: _____ 2006/08/22



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

SAW Filter 611 MHz

MODEL NO.: TA0326A

REV.NO.:4

A. MAXIMUM RATING:

1. Input Power Level: 10 dB_m
2. DC voltage: 3 V
3. Operating Temperature: -20°C to +70°C
4. Storage Temperature: -40°C to +85°C


RoHS Compliant
Lead free
Lead-free soldering

B. ELECTRICAL CHARACTERISTICS:


Item	Unit	Min.	Type.	Max.
Center frequency F _c	MHz	-	611	-
Insertion Loss I _{Lmin} (reference level)	dB	-	2.95	4.5
3dB Bandwidth BW _{-3dB}	MHz	7	9.8	-
40dB Bandwidth BW _{-40dB}		-	20.5	24
Amplitude Ripple 609.5~ 612.5 MHz	dB	-	0.4	1.3
Rejection:(Reference level from 0dB)				
520 to 560 MHz	dB	38	44	-
660 to 700 MHz	dB	38	45	-
Source impedance Z _s	Ω	-	50	-
Load impedance Z _L	Ω	-	50	-

Note: I_{Lmin} is the minimum of the pass band attenuation. The center frequency F_c is the mean value of the upper and lower frequencies at the 3dB filter attenuation level relative to the I_{Lmin}.


C. Frequency Characteristics :

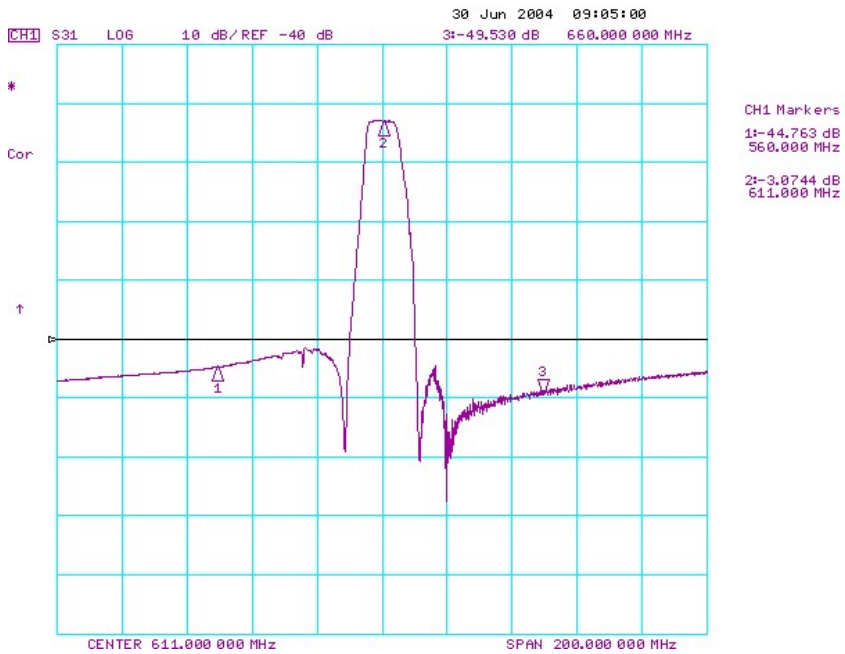

D. MEASUREMENT CIRCUIT:

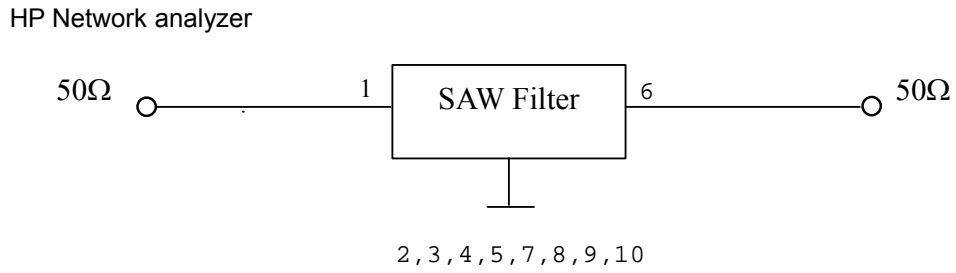

E. OUTLINE DRAWING:

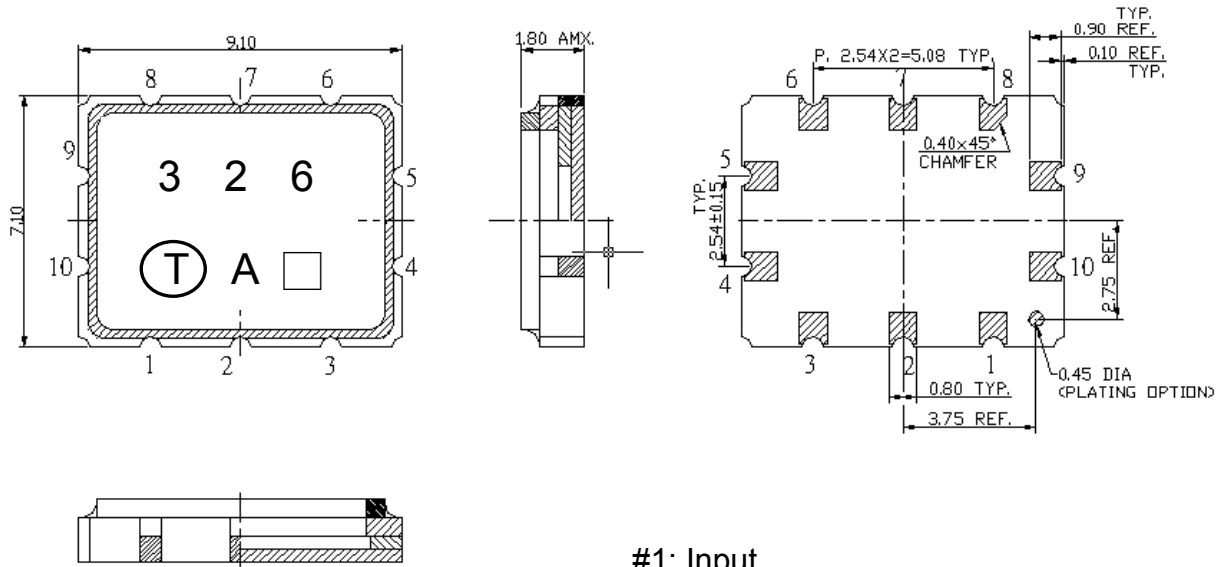

- #1: Input
 - #6: Output
 - #2,3,4,5,7,8,9,10: Ground
 - : Date Code
- Unit: mm

Product Year Code

Year	2001 2005	2002 2006	2003 2007	2004 2008
Product Code	A	a	Ⓐ	ⓐ

H. RECOMMENDED REFLOW PROFILE :

