

DESCRIPTION

The TD110 series of DC/DC converters provide up to 110 watts of continuous output power. Available in three standard input range of 10-20 VDC, 18-36 VDC and 36-72 VDC, they are ideal for a variety of applications including telecoms, portable equipment and vehicle mounted instrumentation. All units are available in compact "open PCB" or "enclosed" mechanical formats.

FEATURES

- Low cost
- Small size, light weight
- 100% burn-in
- Overvoltage protection
- Overcurrent protection
- Three wide input ranges:
10-20 VDC, 18-36 VDC and 36-72 VDC

INPUT SPECIFICATIONS

Input voltage :	10 to 20 VDC (TD110 "L" series) 18 to 36 VDC (TD110 "M" series) 36 to 72 VDC (TD110 "H" series)
Input current :	15A for 12VDC 9.4A for 24VDC 4.7A for 48VDC

OUTPUT SPECIFICATIONS

Output voltage/current :	See rating chart
Total output power :	110 watts maximum
Ripple and noise :	1% peak to peak max.
Overvoltage protection :	set at 112-132% of its nominal output voltage
Overcurrent protection :	All outputs protected to short circuit conditions
Temperature coefficient :	All outputs $\pm 0.04\%$ / $^{\circ}\text{C}$ maximum
Transient response :	Maximum excursion of 4% or better on all models, recovering to 1% of final value within 500us after a 25% step load change

TD110 SERIES



ENVIRONMENTAL SPECIFICATIONS

Operating temperature :	0 $^{\circ}\text{C}$ to +70 $^{\circ}\text{C}$
Storage temperature :	-40 $^{\circ}\text{C}$ to +85 $^{\circ}\text{C}$
Relative humidity :	5% to 95% non-condensing
Derating :	Derate from 100% at +50 $^{\circ}\text{C}$ linearly to 50% at +70 $^{\circ}\text{C}$

GENERAL SPECIFICATIONS


Switching frequency :	50KHz $\pm 5\text{KHz}$
Efficiency :	70% minimum at full load
Line regulation :	$\pm 0.5\%$ maximum at full load
Withstand voltage :	1000VDC from input to output
MTBF :	400,000 hours minimum at full load at 25 $^{\circ}\text{C}$ ambient, calculated per MIL-HDBK-217F

OUTPUT VOLTAGE/CURRENT RATING CHART

Product # (3)	Output #1				Output #2 (1)					Output #3				Output #4				Maximum Output Power (2)
	Vnom.	Imin.	Imax.	Tol.	Vnom.	Imin.	Imax.	Ipeak	Tol.	Vnom.	Imin.	Imax.	Tol.	Vnom.	Imin.	Imax.	Tol.	
TD110-S05	5V	0A	22A	3%	(N/A)					(N/A)				(N/A)				110W
TD110-S12	12V	0A	9.0A	2%	(N/A)					(N/A)				(N/A)				110W
TD110-S15	15V	0A	7.5A	2%	(N/A)					(N/A)				(N/A)				110W
TD110-S24	24V	0A	4.5A	2%	(N/A)					(N/A)				(N/A)				110W
TD110-S30	30V	0A	3.6A	2%	(N/A)					(N/A)				(N/A)				110W
TD110-D23	+5V	0.8A	10A	3%	+12V	0A	5A	9.0A	3%	(N/A)				(N/A)				110W
TD110-T31	+5V	0.8A	10A	3%	+12V	0A	5A	9.0A	3%	-12V	0A	1A	4%	(N/A)				110W
TD110-T32	+5V	0.8A	10A	3%	+15V	0A	4A	7.5A	3%	-15V	0A	1A	4%	(N/A)				110W
TD110-Q40	+5V	0.8A	10A	3%	+12V	0A	5A	9.0A	3%	-12V	0A	1A	4%	-5V	0A	1A	4%	110W
TD110-Q41	+5V	0.8A	10A	3%	+15V	0A	4A	7.5A	3%	-15V	0A	1A	4%	+24V	0A	1A	4%	110W
TD110-Q42	+5V	0.8A	10A	3%	+12V	0A	5A	9.0A	3%	-12V	0A	1A	4%	+12V	0A	1A	4%	110W
TD110-Q45-1	+5V	0.8A	10A	3%	+12V	0A	5A	9.0A	3%	-12V	0A	1A	4%	+24V	0A	1.5A	10%	110W
TD110-Q45-2	+5V	0.8A	10A	3%	+24V	0A	3A	5.0A	3%	-12V	0A	1A	4%	+12V	0A	1A	4%	110W
TD110-Q46	+5V	0.8A	10A	3%	+15V	0A	4A	7.5A	3%	-15V	0A	1A	4%	-5V	0A	1A	4%	110W

- Notes: (1) Peak output current with 10% maximum duty cycle for less than 60 seconds.
 (2) TD110"M" & "H" series are suitable only for 110 watts maximum at 20 CFM forced air cooling or 80 watts maximum at convection cooling. TD110"L" series are suitable only for 90 watts maximum at 20 CFM forced air cooling or 70 watts maximum at convection cooling.
 (3) Suffix codes for input range, mechanical format and connector are as follows. TD110-X1X2X3X4X5, "X1X2" is the model code from the above table, "X3" is the input range (L=10-20 VDC, M=18-36 VDC, H=36-72 VDC), "X4" is the mechanical format (Blank=PCB, B=L-bracket, C=enclosed) and "X5" is the input and output connector code (Blank=Molex KK type, T=miniature terminal block), e.g. TD110-31MCT (18-36 VDC input range, enclosed format and miniature terminal blocks).

MECHANICAL SPECIFICATIONS

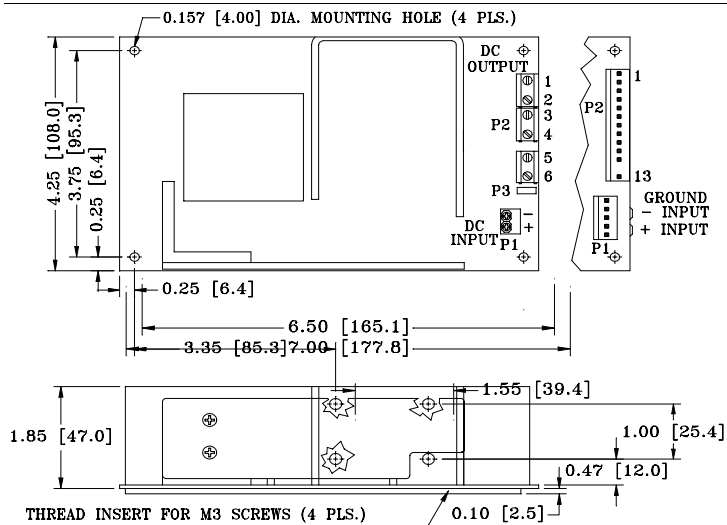

NOTES:

- Dimensions shown in inch [mm]
- Tolerance 0.02 [0.5] maximum
- Molex KK type connectors:
 Input connector mates with Molex housing 09-50-3051 and Molex 2878 series crimp terminal.
 Output connector mates with Molex housing 09-50-3131 and Molex 2878 series crimp terminal.
- Miniature terminal blocks:
 Input terminals allow wires up to 2mm² (AWG #14).
 Output terminals allow wires up to 2mm² (AWG #14).
- Weight: 640grams (PCB format)
- Refer to the last page for mechanical details on L-bracket and enclosed formats.

PIN CHART

MINI TERMINAL	MOLEX CONNECTOR							
	1	2	3	4	5	6	7	8
PRODUCT NO.	1,2,3	4,5	6,7	8,9	10	11	12	13
TD110-S05 TD110-12	OUTPUT #1	RETURN	RETURN	OUTPUT #1	N.C.	N.C.	KEY	N.C.
TD110-S15 TD110-24								
TD110-S30								
TD110-D23	OUTPUT #1	COMMON RETURN	COMMON RETURN	OUTPUT #2	N.C.	N.C.	KEY	N.C.
TD110-T31 TD110-T32	OUTPUT #1	COMMON RETURN	COMMON RETURN	OUTPUT #2	N.C.	OUTPUT #3	KEY	N.C.
TD110-Q40 TD110-Q41	OUTPUT #1	COMMON RETURN	COMMON RETURN	OUTPUT #2	N.C.	OUTPUT #3	KEY	OUTPUT #4
TD110-Q42 TD110-Q45-1								
TD110-Q45-2 TD110-Q46								


L-Bracket and Enclosed Formats of TD110 Series

Unit: inch [mm]

Tolerance: 0.02 [0.5]

B Version


MOUNTING HOLE, THREADED INSERT FOR #6-32 or M3 SCREWS (6 PLS.)

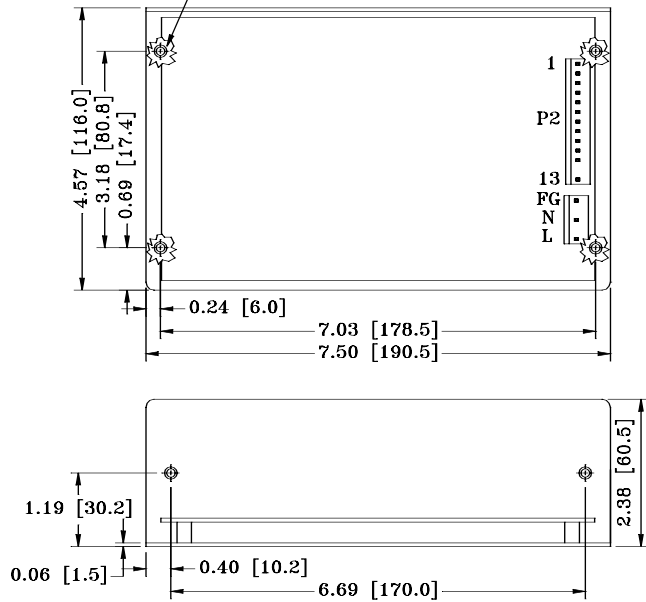

NOTE: Weight: 750 grams approx.

C Version

MOUNTING HOLE, THREADED INSERT FOR #6-32 or M3 SCREWS (6 PLS.)

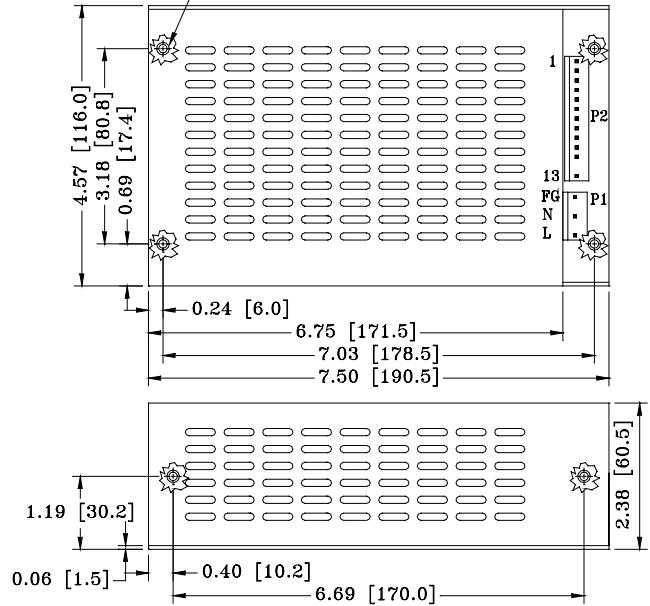

NOTE: Weight: 1050 grams approx.