


SPECIFICATION FOR APPROVAL

REF :



PAGE: 1

PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG No. ABC'S ITEM No.	SP1055□□□□L□-□□□
---------------	--------------------------------	---------------------------------	------------------

. MECHANICAL DIMENSIONS :

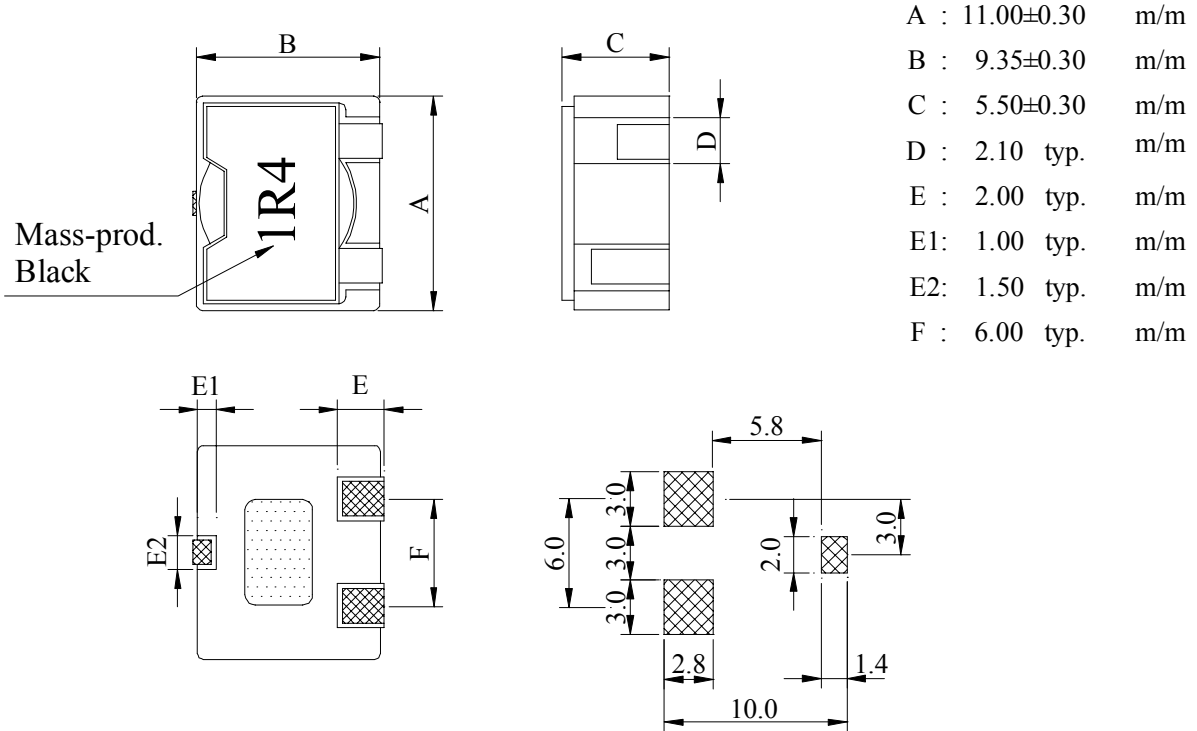

. SCHEMATIC DIAGRAM :




. MATERIALS LIST :

- a . Core : Ferrite ER core
- b . Base : UL 94V-0
- c . Wire : Ultra-fine rectangular
Enamelled copper wire
- d . Clip : Cu / Ni / Sn
- e . Adhesive : Epoxy resin
- f . Remark : Products comply with RoHS'
requirements

Peak Temp : 260 max.
Max time above 230 : 50sec max.
Max time above 200 : 70sec max.

. GENERAL SPECIFICATION :

- a . Storage temp. : -55 ~ +135
- b . Operating temp. : -55 ~ +135
(Temp. rise included)
- c . Resistance to solder heat : 260 . 10 secs.

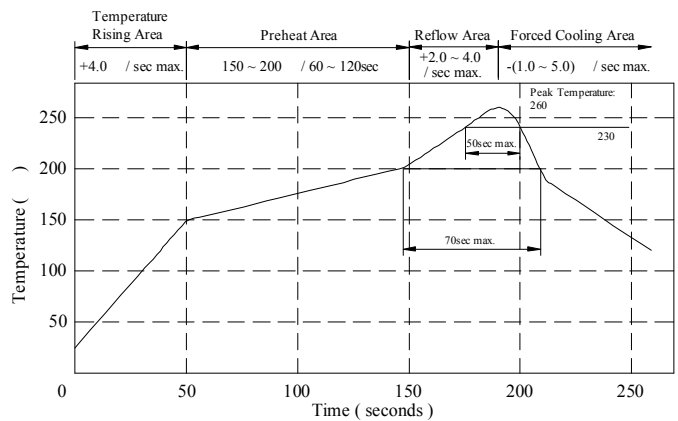

AR-001A

SPECIFICATION FOR APPROVAL

REF :

PAGE: 2

PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG No.	SP1055□□□□L□-□□□
		ABC'S ITEM No.	

. ELECTRICAL CHARACTERISTICS :

DWG No.	Inductance L (μ H)	Isat (A)	Irms (A)	RDC ($m\Omega$)	
				max.	typ.
SP1055R36YL□-□□□	0.36 \pm 30 %	26.0	28.0	1.7	1.3
SP1055R80ML□-□□□	0.80 \pm 20 %	18.0	20.0	2.5	1.9
SP10551R4ML□-□□□	1.40 \pm 20 %	14.0	16.0	3.2	2.4
SP10552R2ML□-□□□	2.20 \pm 20 %	10.0	12.0	5.8	4.7
SP10553R2ML□-□□□	3.20 \pm 20 %	9.0	11.0	7.2	5.6
SP10554R3ML□-□□□	4.30 \pm 20 %	8.0	10.0	8.5	6.5
SP10555R7ML□-□□□	5.70 \pm 20 %	7.0	7.6	13.2	10.7
SP10557R2ML□-□□□	7.20 \pm 20 %	6.2	7.0	15.5	11.9
SP10558R8ML□-□□□	8.80 \pm 20 %	5.6	6.0	17.2	13.2

- 1). □ : Packaging information ... A Bulk B Taping Reel
- 2). "-□□□":Reference code
- 3). Measured frequency of inductance is 100 KHz / 1V
- 4). Isat base on inductance drop 25% typ. of L value at 20
- 5). Irms base on temp. rise 40 max.

AR-001A





SPECIFICATION FOR APPROVAL

REF :

PAGE: 3

PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG No. ABC'S ITEM No.	SP1055□□□□L□-□□□
---------------	--------------------------------	---------------------------------	------------------

@ Inductance VS. DC Superposition characteristics

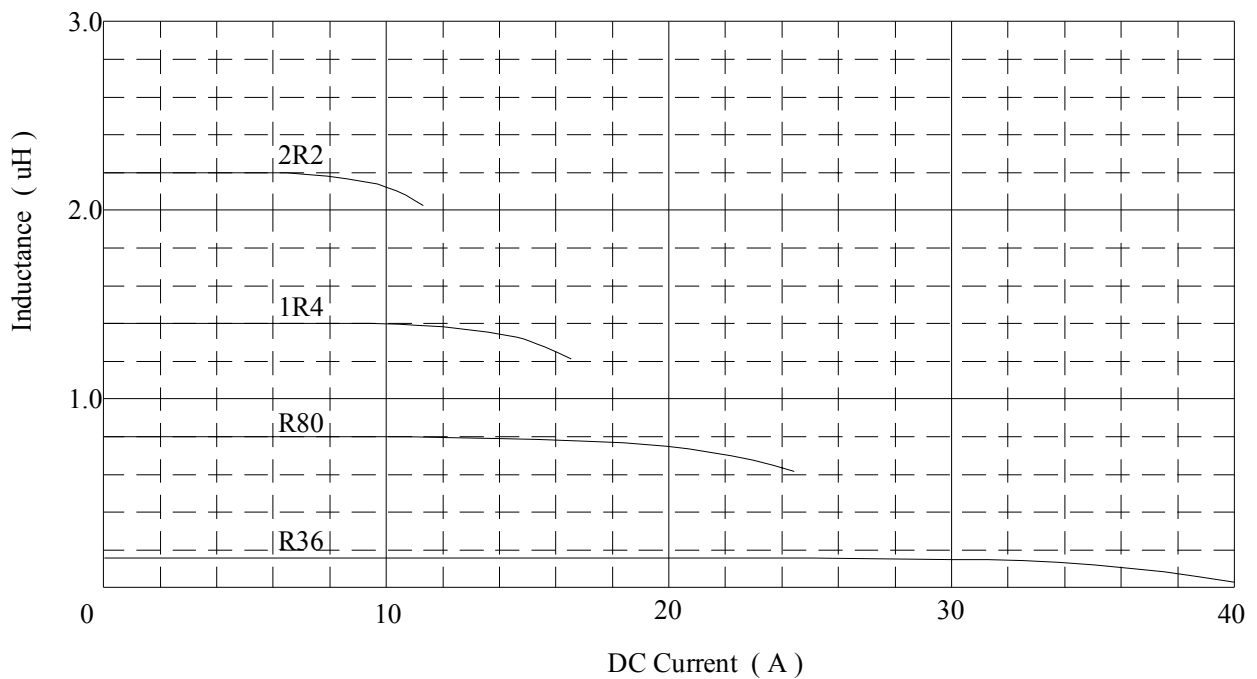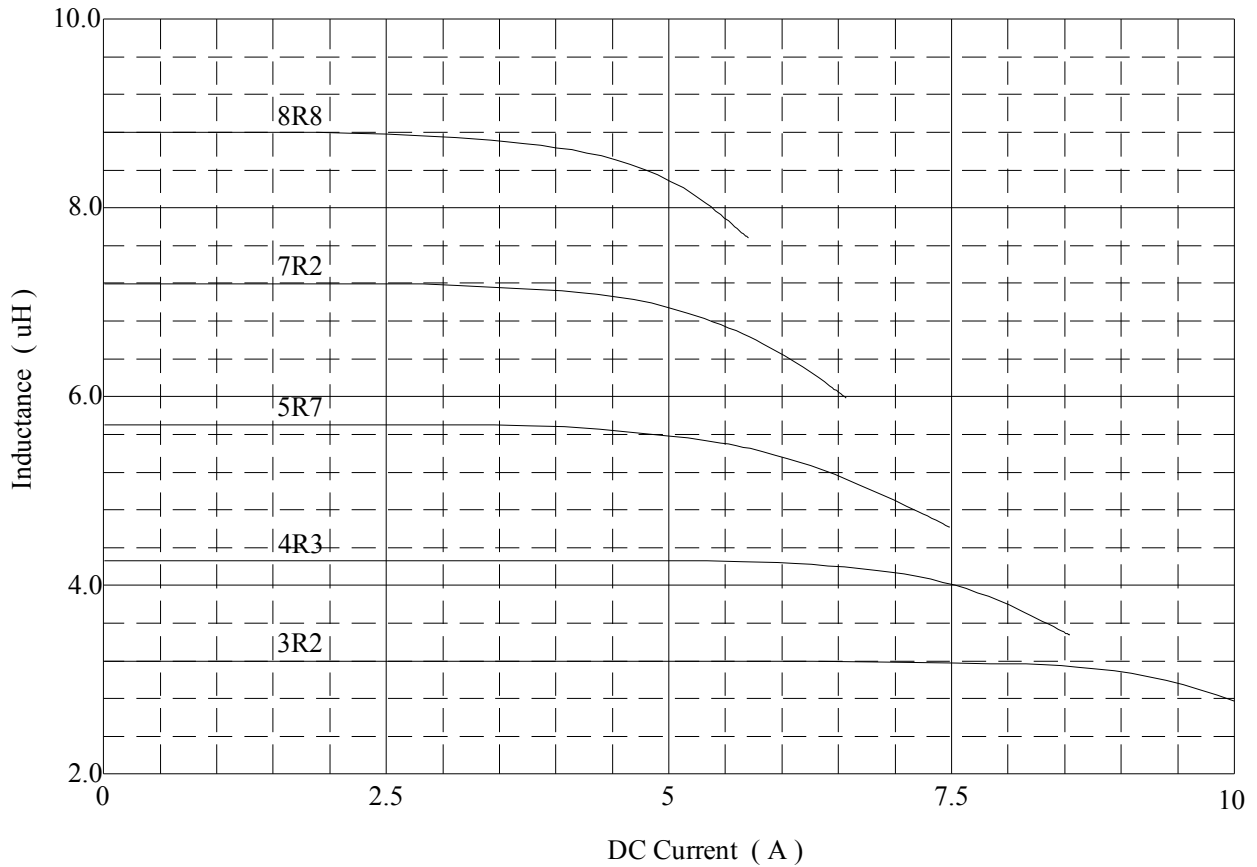

AR-001A












SPECIFICATION FOR APPROVAL

REF :

PAGE: 4

PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG No.	SP1055□□□□L□-□□□
		ABC'S ITEM No.	

@ DC Current VS Temperature Rise

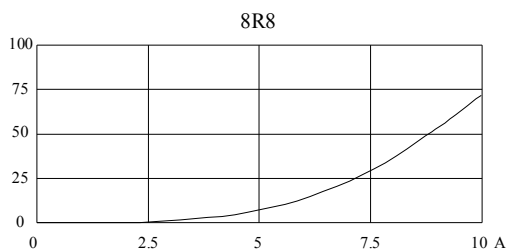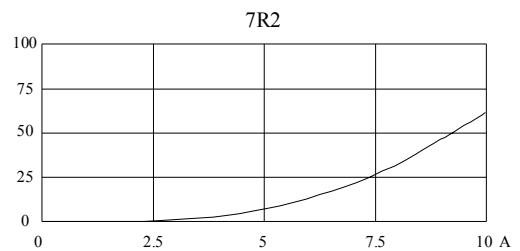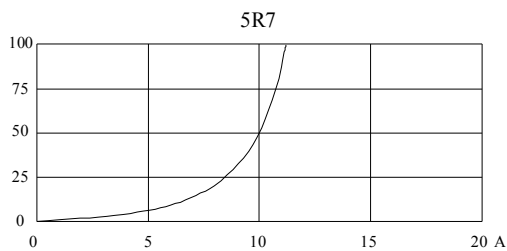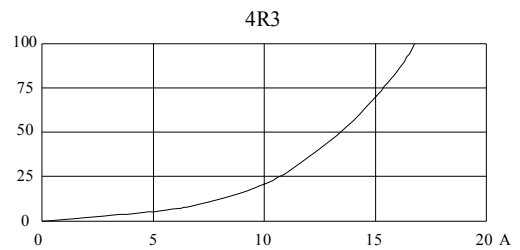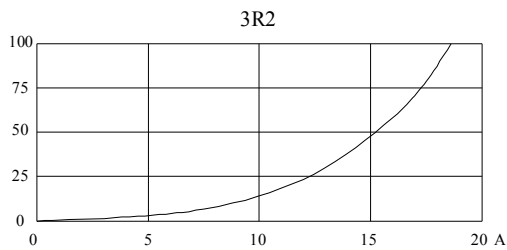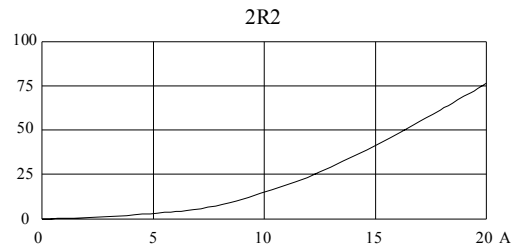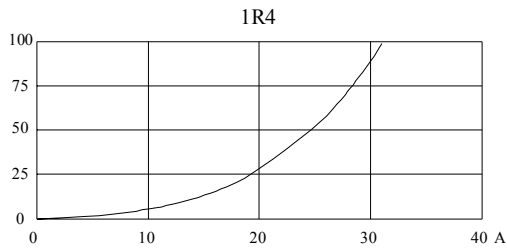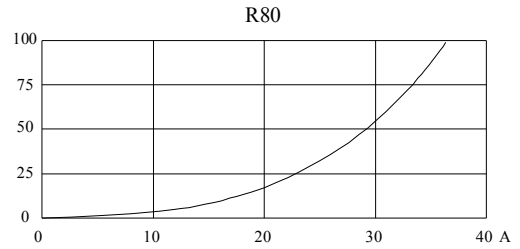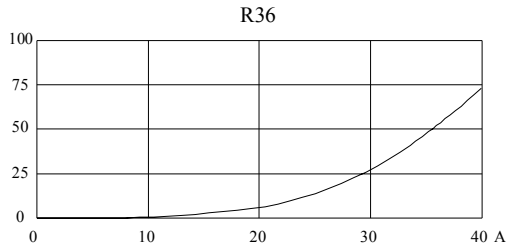

AR-001A

SPECIFICATION FOR APPROVAL



REF :

PAGE: 5

PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG No.	SP1055□□□□L□-□□□
		ABC'S ITEM No.	

PACKAGING INFORMATION :

(1) Configuration

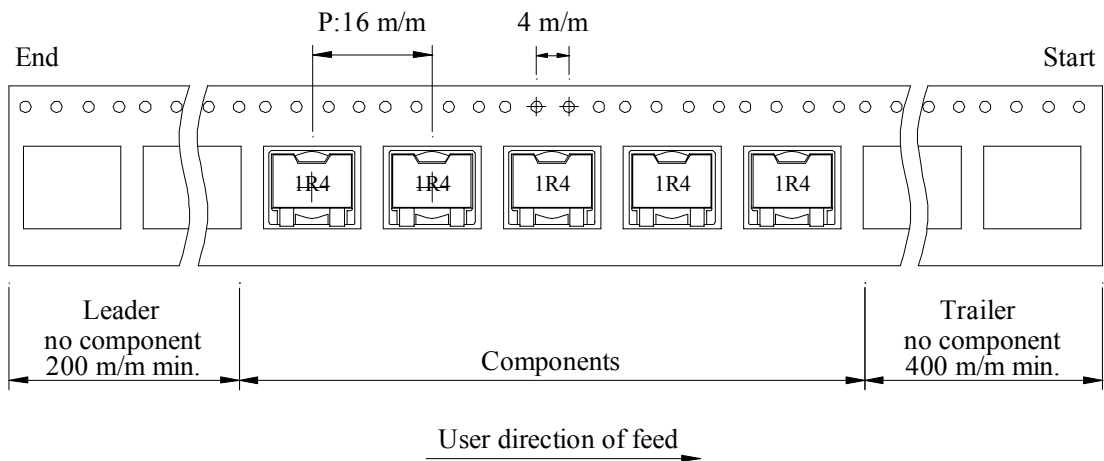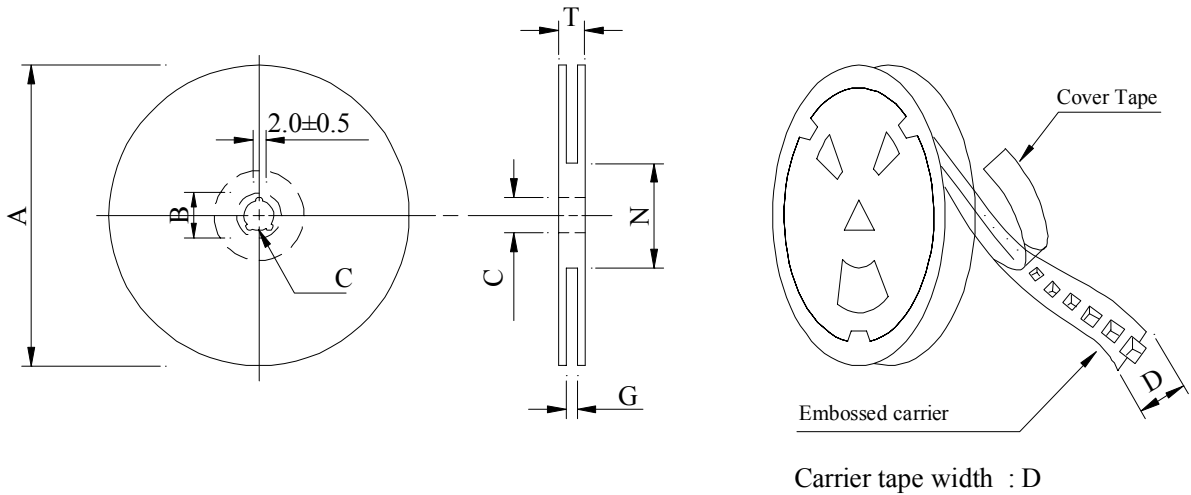

(2) Dimensions

Unit:m/m

Style	A	B	C	D	G	N	T
13 - 24	330	21±0.8	13±0.5	24	26 ⁺⁰	50 ⁻⁰	30.4

(3) Q'TY & G.W. Per package

Series	Inner : Reel			Outer : Carton		
	Q'TY (pcs)	G.W. (gw)	Style	Q'TY (pcs)	G.W. (Kg)	Size (cm)
SP1055	600	700	13 - 24	2,400	6.50	40 x 40 x 24

AR-001A

SPECIFICATION FOR APPROVAL

REF :

PAGE: 7

PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG No. ABC'S ITEM No.	SP1055□□□□L□-□□□
---------------	--------------------------------	---------------------------------	------------------

. RELIABILITY TEST :

Test item	Specification	Test condition						
Solderability	More than 90% of the terminal electrode shall be covered With fresh solder.	Preheat : 150±25 for 60 seconds Solder : Sn96.5 / Ag3 / Cu0.5 or equivalent Solder temp. : 235±5 Flux : Rosin Dip time : 4±1 seconds						
Thermal shock test (Temp. cycle)	Inductance shall not change more than ±20%	<table style="width: 100%; border: none;"> <tr> <td style="text-align: center;">Room temp. 15 minutes</td> <td style="text-align: center;">→</td> <td style="text-align: center;">-25±2 30 minutes</td> </tr> <tr> <td style="text-align: center;">Room temp. 15 minutes</td> <td style="text-align: center;">→</td> <td style="text-align: center;">85±2 30 minutes</td> </tr> </table> <p>Total : 50 cycles</p>	Room temp. 15 minutes	→	-25±2 30 minutes	Room temp. 15 minutes	→	85±2 30 minutes
Room temp. 15 minutes		→	-25±2 30 minutes					
Room temp. 15 minutes		→	85±2 30 minutes					
Humidity Resistance test		Temperature : 40±2 Humidity : 90 ~ 95% Applied current : Per spec. Time : 500 hours						
High temp. Resistance test	Temperature : 85±2 Applied current : Per spec. Time : 500 hours							

AR-001A

