



1. Mechanical Dimensions:

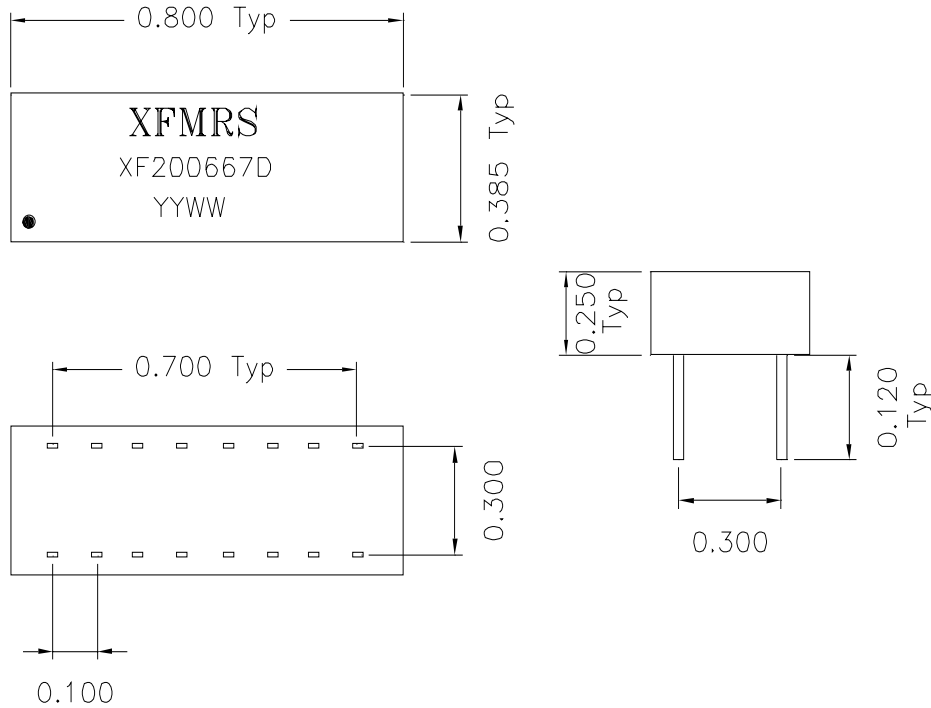

2. Schematics:

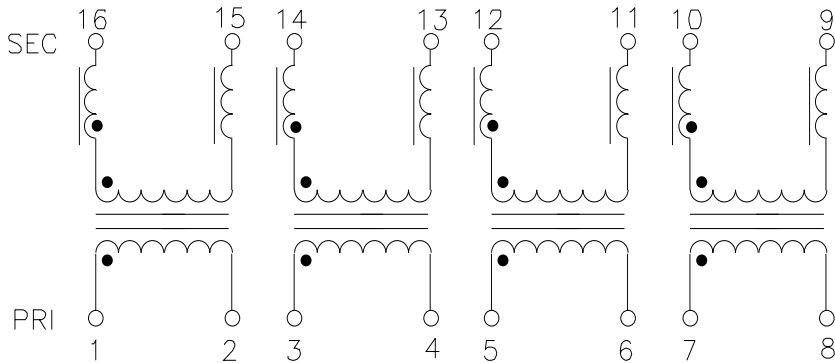

3. Electrical Specifications: @25°C

- PRI/SEC Isolation: 2000Vrms
- Insulation Resistance: 10,000 MOhms
- Turns Ratio: 1:1±2%
- PRI OCL: 200uH Min @100KHz 50mV
- Leakage L: 0.30uH Max @100KHz 50mV
- Cw/w: 15pF Max (Pri/Sec) 100KHz, 50mV
- PRI DCR: 0.30 ohms Max
- SEC DCR: 0.70 ohms Max
- PRI/SEC Cw/w: 10pF Max @100KHz 50mV
- CHOKE OCL: 30uH Typ @100KHz 50mV

DOC. REV A/1

XFMRS Inc	Title: 10 BASE T Magnetics	
	UNLESS OTHERWISE SPECIFIED	P/N: XF200667D
	TOLERANCES:	REV. A
	.xxx ±0.010	DWN. 李清儿 May-13-99
Dimensions in INCH	CHK. 孙悦 May-13-99	
SCALE 2.5:1 SHT 1 OF 1	APP. Joe Huff	May-19-99