

## Product Features

- Solid-state linear design
- Small and light weight
- Suitable for iDEN
- 50 Ohm Input/Output impedance
- High reliability and ruggedness
- Built in Output Isolator
- Built in monitoring circuit
- High linearity

## Application

- iDEN Repeater



## Description

This HPA Module is a high gain, wide dynamic range amplifier module. It has superior performance comes with a modest price tag. Custom design available.

### Electrical Specifications @ VDD=+27DC, T=25°C, 50Ω System


PARAMETER	Symbol	RFP-0850-27-27	
Frequency Range	BW	851~869MHz	835 ~940MHz
Output Power	P	27dBm (24dBm/tone)	
Gain	G	27dB ±1dB (min)	
Gain Flatness	ΔG	1dB (peak to peak)	
IMD Pout= 27dBm (24dBm/tone)	IMD	≤ -58dBc (25kHz)	
		≤ -60dBc (1MHz)	
Input Power ALC	ALC	Operating point	28dBm ± 0.5dB
		Operating range	10dB (min)
Input/Output VSWR	S11/S22	1.3 :1 (max) to 50Ω	
DC Input Voltage	VDC	+27V DC	
DC Input Current	IDD	1.2A(max) (@Vdc= +27V, @24dBm/tone)	
RF Power Detect	DET	4V @ 30dBm, ( 100mV / 1dB ), Detect range : 0dBm ~ 30dBm	
Over Power Alarm & shutdown	OPA	31dBm±0.5dBm, TTL High Alarm	
VSWR Alarm	VSWR	S22 > 3 : 1 & Pout > 15dBm, TTL High Alarm	
Over Temperature Alarm & shutdown	OTS	90°C±5°C (shutdown), 70°C±5°C (auto recovery) TTL High Alarm	
Operating Temperature	To	-10 ~ +50	
Dimension		120 x 100 x 25(mm)	
RF Connectors		SMA Female	

## Interface Connectors

### D-Sub, 9-Pin-Control


Pin #	DESCRIPTION	Specifications
1	RF Power Monitor	4V @ 30dBm, ( 100mV / 1dB ), Detect range : 0dBm ~ 30dBm
2	VSWR Alarm	S22 > 3 : 1 & Pout > 15dBm, TTL High Alarm
3	Over Power Alarm	31dBm±0.5dBm, TTL High Alarm
4	RF Power Enable	Enable : TTL Low & GND / Disable : TTL High & Open
5	Over Temperature Alarm & shutdown	90°C±5°C (shutdown), 70°C±5°C (auto recovery) TTL High Alarm
6	+VCC	+27V
7	+VCC	+27V
8	GND	GND
9	GND	GND

## OUTLINE DRAWING

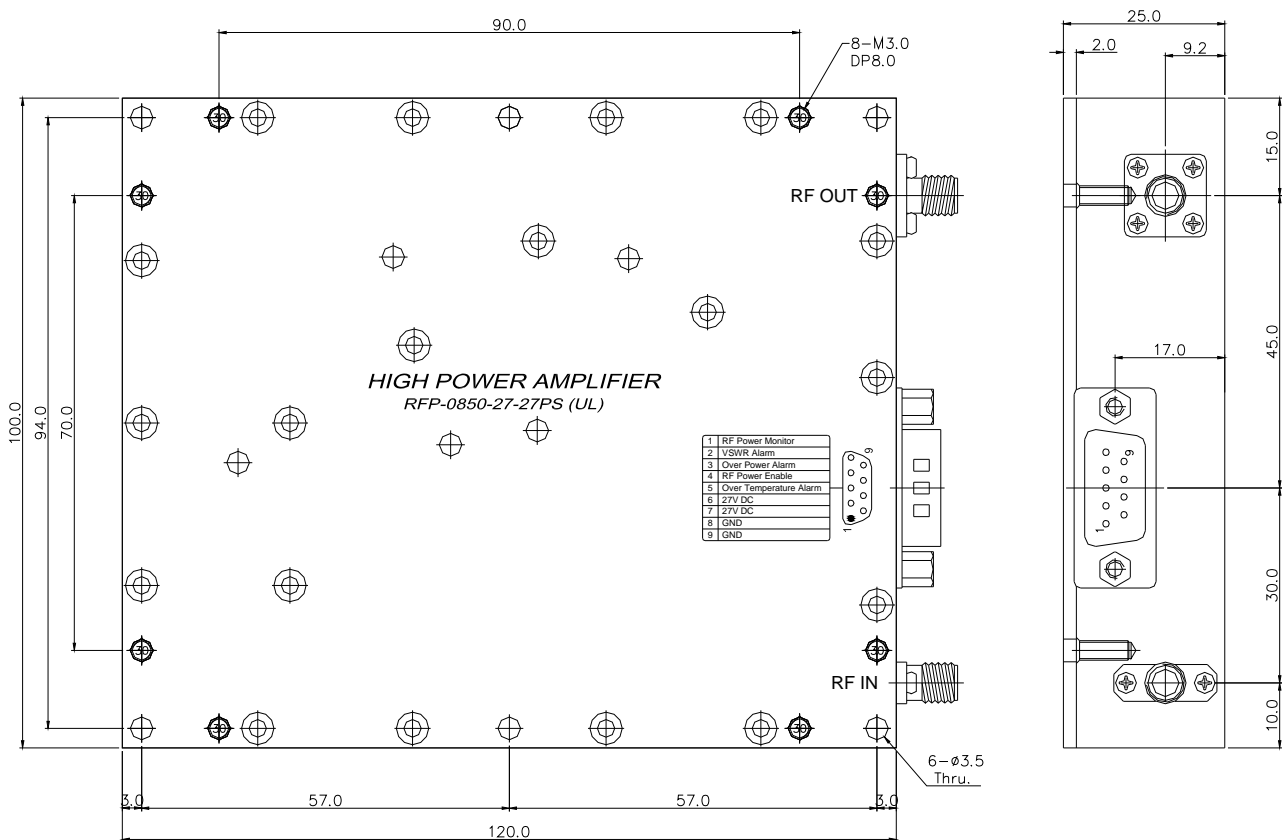


## TYPICAL PERFORMANCE


### GAIN & S11

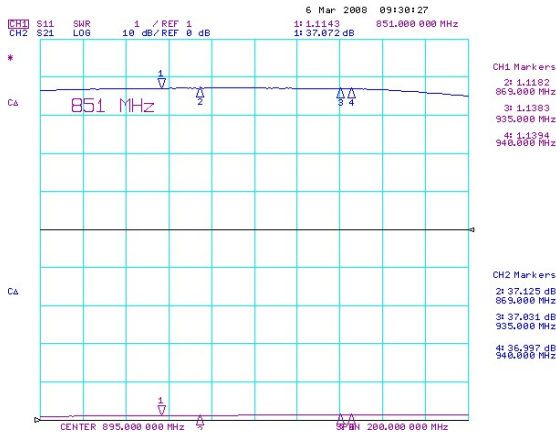


### S22

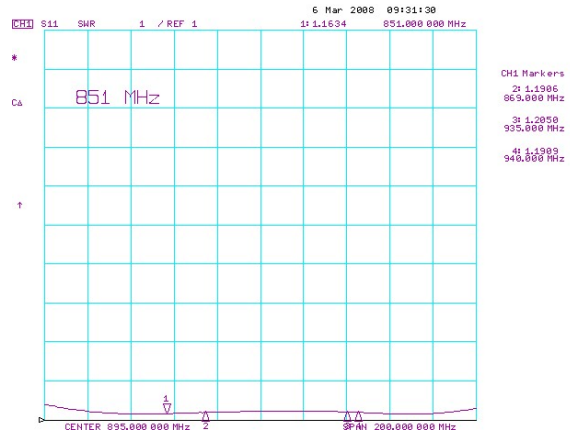


### 24dBm/tone (1MHz Spacing) @ 860MHz

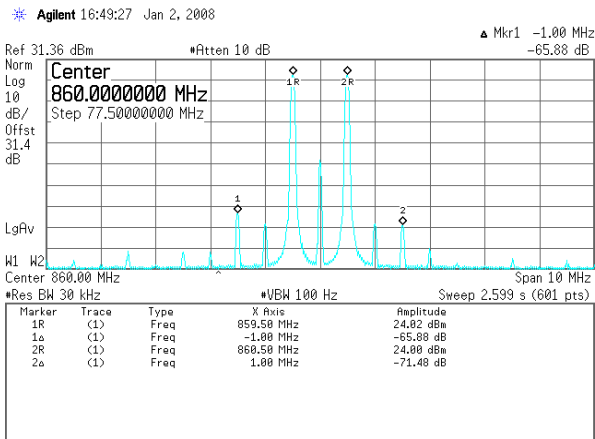


### 24dBm/tone (1MHz Spacing) @ 937.5MHz

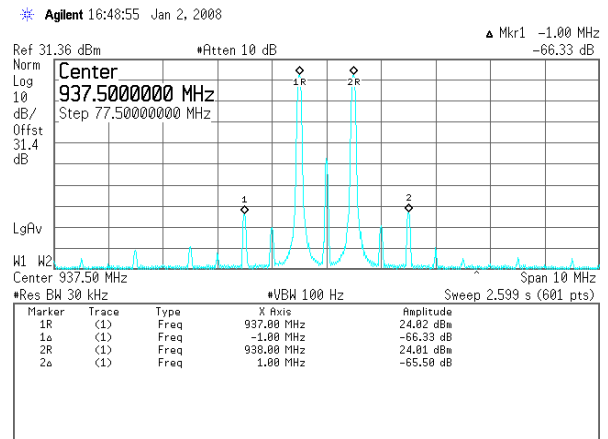

### 24dBm/tone (50KHz Spacing) @ 860MHz

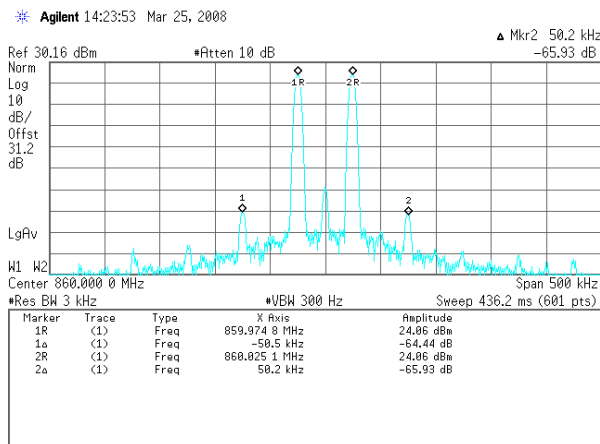

### 24dBm/tone (50KHz Spacing) @ 937.5MHz

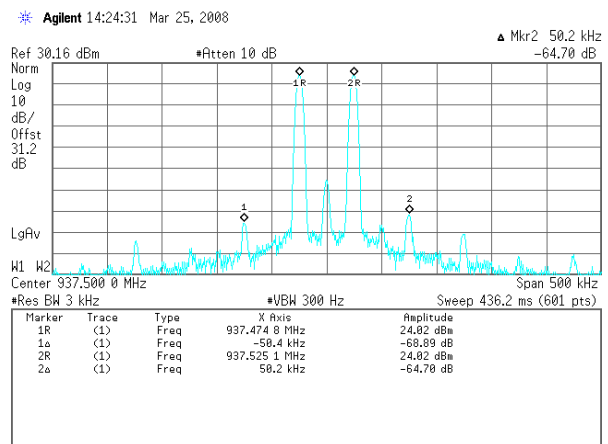

RFHIC Corporation (RFHIC) reserves the right to make changes to any products herein or to discontinue any product at any time without notice. RFHIC do not assume any liability for the suitability of its products for any particular purpose, and disclaims any and all liability, including without limitation consequential or incidental damages. The product specifications herein expressed have been carefully checked and are assumed to be reliable. However, RFHIC disclaims liability for inaccuracies and strongly recommends buyers to verify that the information they are using is current before placing purchase orders. RFHIC products are not intended for use in life support equipment or application where malfunction of the product can be expected to result in personal injury or death. Buyer uses or sells such products for any such unintended or unauthorized application, buyer shall indemnify, protect and hold RFHIC and its directors, officers, stockholders, employees, representatives and distributors harmless against any and all claims arising out of such use. RFHIC's liability under or arising out of damages, claims of whatsoever kind and nature which RFHIC products could cause shall be limited in amount to the net purchase price of the products sold to buyer by RFHIC.