

Product Features

- Solid-state linear design
- Small and light weight
- Suitable for iDEN
- 50 Ohm Input/Output impedance
- High reliability and ruggedness
- Built in Output Isolator
- Built in monitoring circuit
- High efficiency

Application

- iDEN Repeater



Description

This HPA Module is a high gain, wide dynamic range amplifier module. It has superior performance comes with a modest price tag. Custom design available.

Electrical Specifications @ VDD=+27VDC, T=25°C, 50Ω System


PARAMETER	Symbol	Value	
Frequency Range	BW	851~869MHz	935 ~940MHz
Output Power	P	33dBm (30dBm/tone)	
Gain	G	39dB	
Gain Flatness	ΔG	± 1 dB @ T = 25°C	
IMD Pout= 33dBm (30dBm/tone)	IMD	≤60dBm, 30dBm(25kHz)	
		≤60dBm, 30dBm(1MHz)	
ALC	ALC	Operating point	35dBm ± 0.5dB
		Operating range	10dB (min)
Second harmonic	H	≤ -50 dBc	
Input/Output VSWR	S11/S22	1.3 :1 (max) to 50Ω	
DC Input Voltage	VDC	+27V DC	
Current Consumption	IDD	1.5A(typ)@ 27VDC, 2W	
Over Temperature Alarm & shutdown	OTS	90°C±5°C (shutdown), 70°C±5°C (auto recovery)	
Over Power Alarm & shutdown	OPS	Alarm: High @ Pout ≥ 37dBm(shutdown),	
Operating Temperature	To	-20 ~ +60°C	
Dimension Size (L x W x H)		150 x 120 x 25(mm)	
RF Connectors		SMA Female	

Interface Connectors

D-Sub, 9-Pin-Control

Pin #	DESCRIPTION	Specifications
1	RF Power Monitor	5~35dBm(1V~4V). 100mV/dB
2	VSWR Alarm	Alarm: High @ Open port (Over + 20dBm)
3	Over Power Alarm & shutdown	Alarm: High @ Pout ≥ 37dBm(shutdown),
4	RF Power Enable	Enable: Low & GND, Disable: High & Open
5	Over Temperature Alarm & shutdown	Alarm: High @ 90 °C±5 °C (shutdown), 70 °C±5 °C (auto recovery & Alarm clear)
6	+VCC	+27V
7	+VCC	+27V
8	GND	GND
9	GND	GND



OUTLINE DRAWING

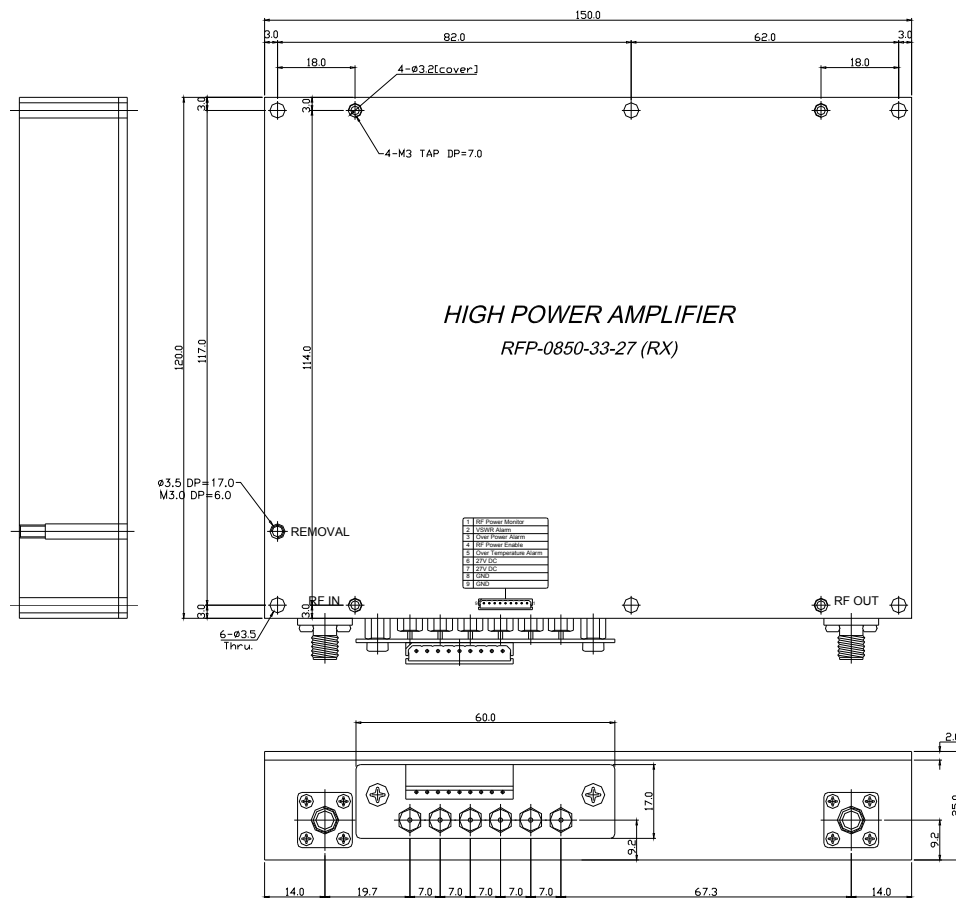


TYPICAL PERFORMANCE

GAIN & GAIN FLATNESS


S11

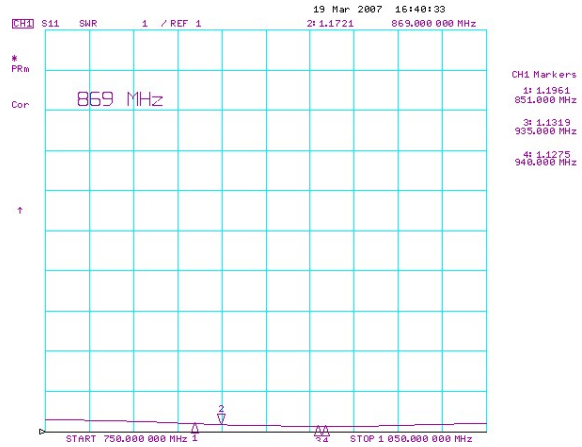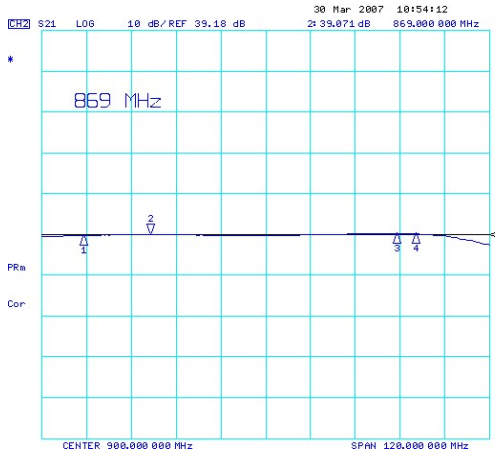


S22

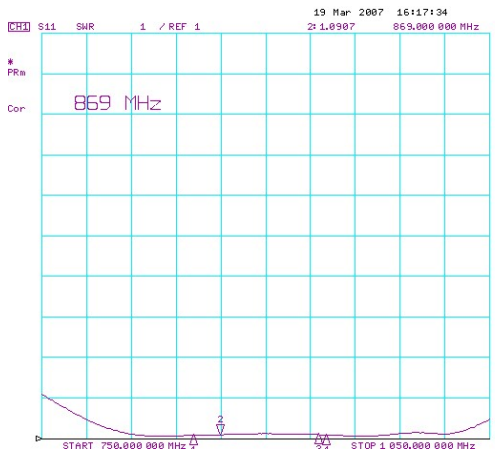


Pout=2 x 30 dBm@ 860MHz (TS=1MHz)

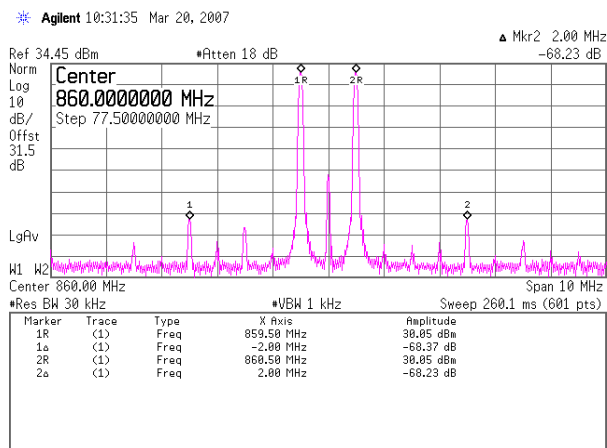


Pout=2 x 30 dBm@ 937.5MHz (TS=1MHz)

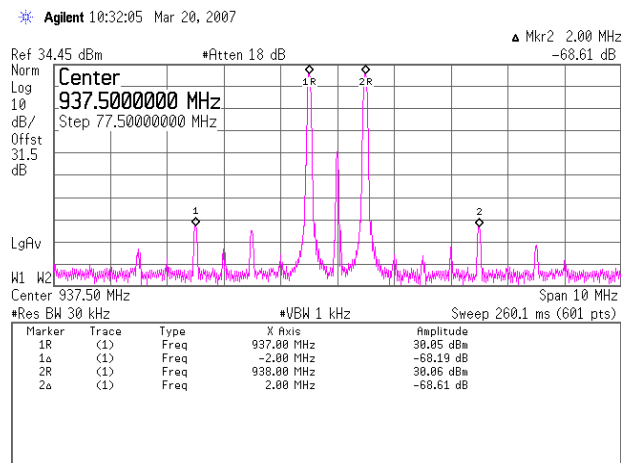

Pout=2 x 30 dBm@ 860MHz (TS=25KHz)

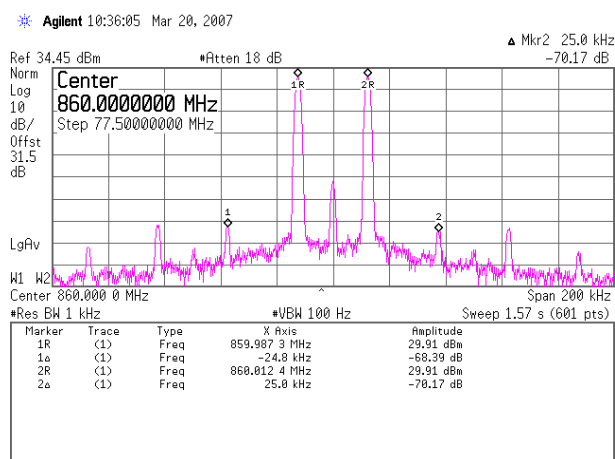

Pout=2 x 30 dBm@ 937.5MHz (TS=25KHz)

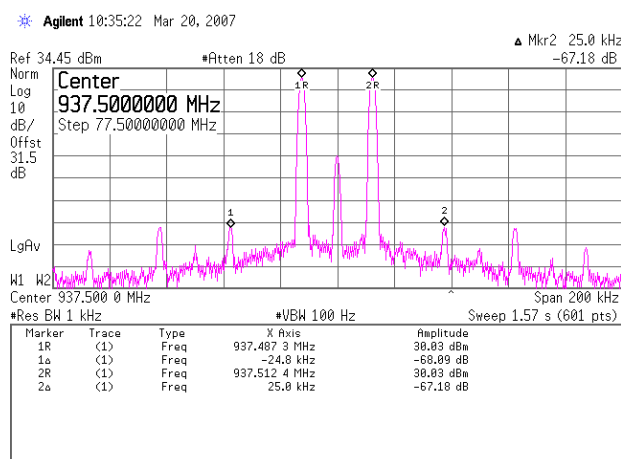

RFHIC Corporation (RFHIC) reserves the right to make changes to any products herein or to discontinue any product at any time without notice. RFHIC do not assume any liability for the suitability of its products for any particular purpose, and disclaims any and all liability, including without limitation consequential or incidental damages. The product specifications herein expressed have been carefully checked and are assumed to be reliable. However, RFHIC disclaims liability for inaccuracies and strongly recommends buyers to verify that the information they are using is current before placing purchase orders. RFHIC products are not intended for use in life support equipment or application where malfunction of the product can be expected to result in personal injury or death. Buyer uses or sells such products for any such unintended or unauthorized application, buyer shall indemnify, protect and hold RFHIC and its directors, officers, stockholders, employees, representatives and distributors harmless against any and all claims arising out of such use. RFHIC's liability under or arising out of damages, claims of whatsoever kind and nature which RFHIC products could cause shall be limited in amount to the net purchase price of the products sold to buyer by RFHIC.