


Mixer

P/N: JXWBHP-T-1000-2000

RF Frequency(GHz)	1-2
Lo Frequency(GHz)	1-2
IF Frequency(MHz)	DC-500
Conversion Loss(dB)	7.2
Lo Power(dBm)	+7
LO to RF Isolation(dB)	35
LO to IF Isolation(dB)	25
RF/ LO Connector	SMA-Female
Operating Temperature(°C)	-10~+70

Outline Drawing (Size: mm)

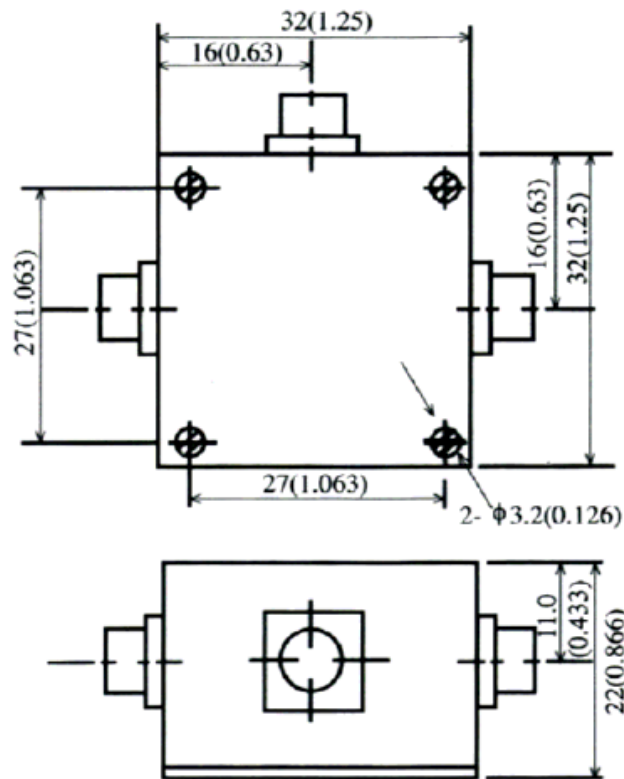

For current data sheets, please contact: sales@aacix.com