

RF Power MOSFET Transistor 15W, 100-500 MHz, 28V

M/A-COM Products
Released - Ver 08.07

Features

- N-Channel enhancement mode device
- DMOS structure
- Lower capacitances for broadband operation
- Common source configuration
- Lower noise floor
- RoHS Compliant
- 100 MHz to 500 MHz operation

ABSOLUTE MAXIMUM RATINGS AT 25° C

Parameter	Symbol	Rating	Units
Drain-Source Voltage	V_{DS}	65	V
Gate-Source Voltage	V_{GS}	20	V
Drain-Source Current	I_{DS}	4.2	A
Power Dissipation	P_D	48.6	W
Junction Temperature	T_J	200	°C
Storage Temperature	T_{STG}	-55 to 150	°C
Thermal Resistance	θ_{JC}	3.6	°C/W

TYPICAL DEVICE IMPEDANCES

F (MHz)	$Z_{IN} (\Omega)$	$Z_{LOAD} (\Omega)$
100	6.4-j25.0	22.0+j16.0
300	6.5-j12.0	15.0+j14.0
500	1.7-j10.5	8.0=j10.5
$V_{DD}=28V, I_{DQ}=150\text{ mA}, P_{OUT}=15.0\text{ W}$		


Z_{IN} is the series equivalent input impedance of the device from gate to source.

Z_{LOAD} is the optimum series equivalent load impedance as measured from drain to ground.

ELECTRICAL CHARACTERISTICS AT 25°C






Parameter	Symbol	Min	Max	Units	Test Conditions
Drain-Source Breakdown Voltage	BV_{DSS}	65	-	V	$V_{GS} = 0.0\text{ V}, I_{DS} = 6.0\text{ mA}$
Drain-Source Leakage Current	I_{DSS}	-	3.0	mA	$V_{GS} = 28.0\text{ V}, V_{DS} = 0.0\text{ V}$
Gate-Source Leakage Current	I_{GSS}	-	3.0	μA	$V_{GS} = 20.0\text{ V}, V_{DS} = 0.0\text{ V}$
Gate Threshold Voltage	$V_{GS(TH)}$	2.0	6.0	V	$V_{DS} = 10.0\text{ V}, I_{DS} = 30.0\text{ mA}$
Forward Transconductance	G_M	.240	-	S	$V_{DS} = 10.0\text{ V}, I_{DS} = 300.0\text{ mA}, \Delta V_{GS} = 1.0V, 80\text{ }\mu\text{s Pulse}$
Input Capacitance	C_{ISS}	-	21	pF	$V_{DS} = 28.0\text{ V}, F = 1.0\text{ MHz}$
Output Capacitance	C_{OSS}	-	15	pF	$V_{DS} = 28.0\text{ V}, F = 1.0\text{ MHz}$
Reverse Capacitance	C_{RSS}	-	7.2	pF	$V_{DS} = 28.0\text{ V}, F = 1.0\text{ MHz}$
Power Gain	G_P	10	-	dB	$V_{DD} = 28.0\text{ V}, I_{DQ} = 150.0\text{ mA}, P_{OUT} = 15.0\text{ W } F = 500\text{ MHz}$
Drain Efficiency	η_D	50	-	%	$V_{DD} = 28.0\text{ V}, I_{DQ} = 150.0\text{ mA}, P_{OUT} = 15.0\text{ W } F = 500\text{ MHz}$
Load Mismatch Tolerance	VSWR-T	-	20:1	-	$V_{DD} = 28.0\text{ V}, I_{DQ} = 150.0\text{ mA}, P_{OUT} = 15.0\text{ W } F = 500\text{ MHz}$

Package Outline

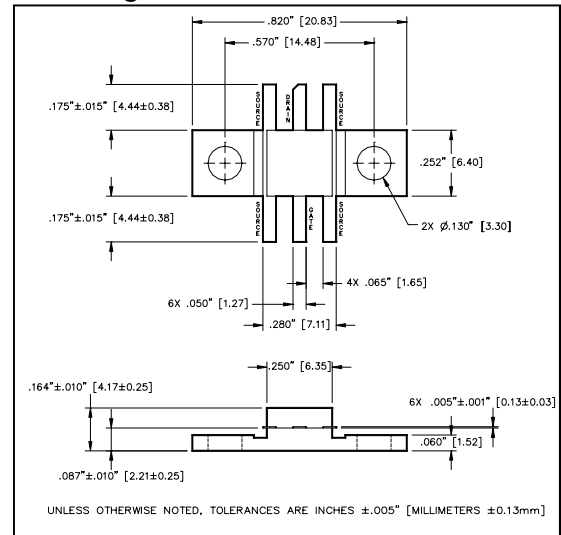

LETTER DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	20.70	20.96	.815	.825
B	14.35	14.61	.565	.575
C	14.73	15.24	.580	.575
D	6.27	6.53	.247	.257
E	6.22	6.48	.245	.255
F	1.14	1.40	.045	.055
G	1.52	1.78	.060	.070
H	2.92	3.17	.115	.125
J	1.40	1.65	.055	.065
K	2.03	2.39	.080	.094
L	3.66	4.32	.144	.170
M	.10	.15	.004	.006


Typical Broadband Performance Curves

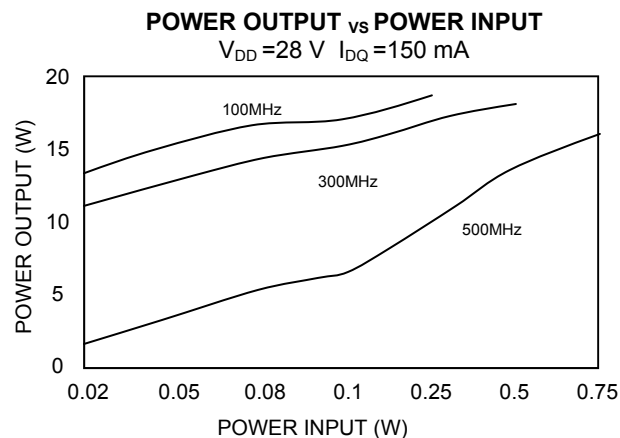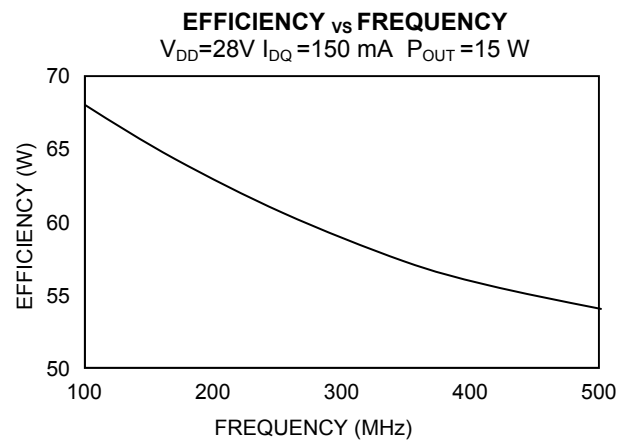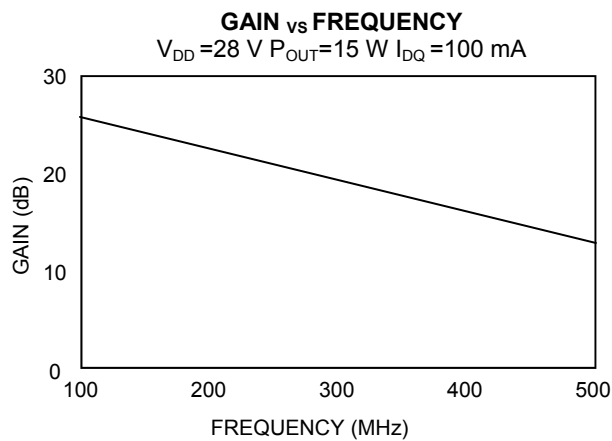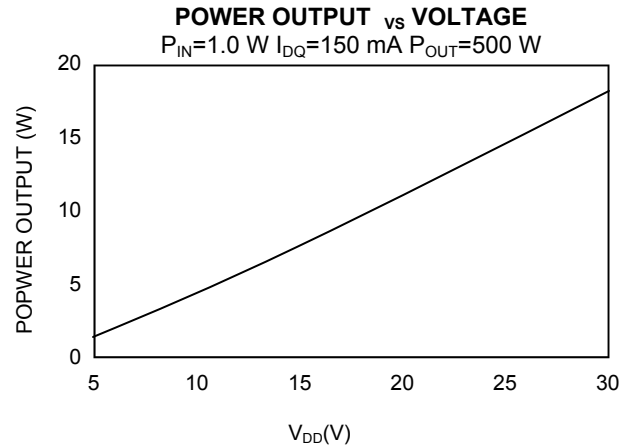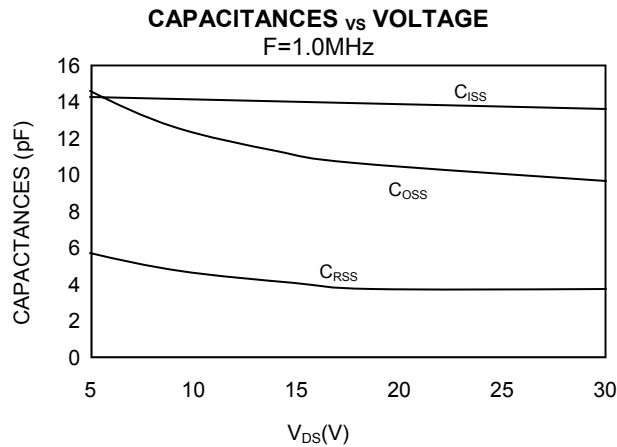


RF Power MOSFET Transistor

M/A-COM Products
Released - Ver 08.07

TEST FIXTURE SCHEMATIC

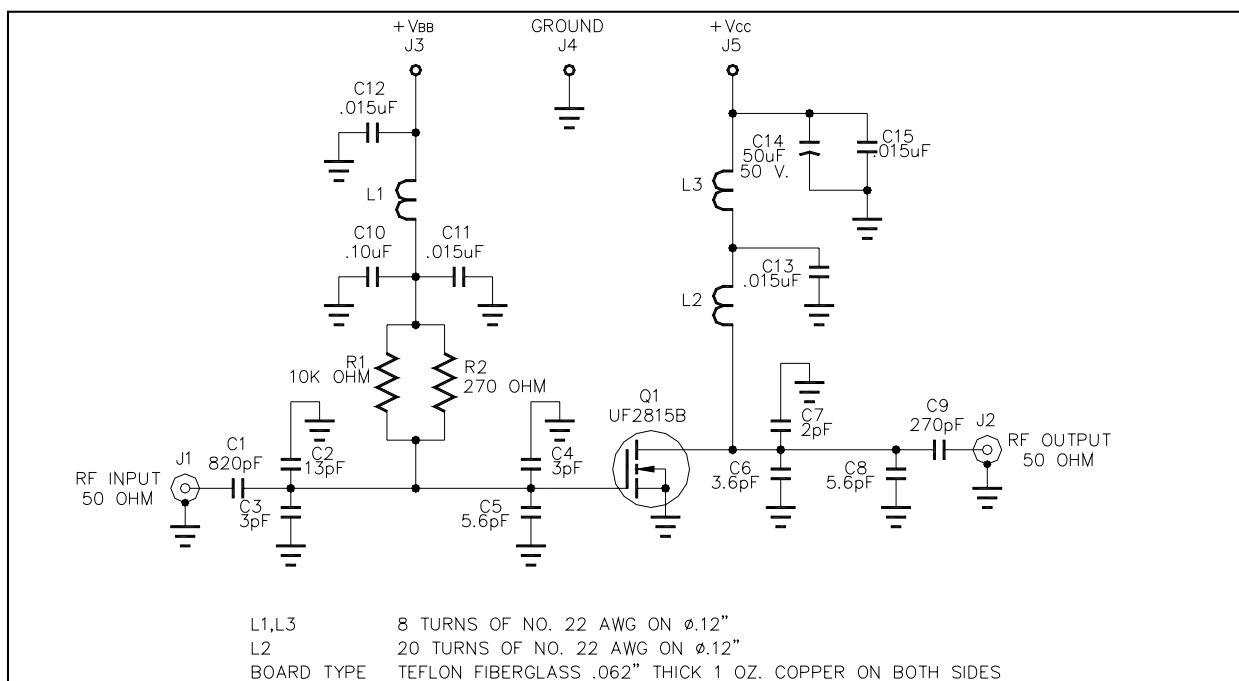

TEST FIXTURE ASSEMBLY

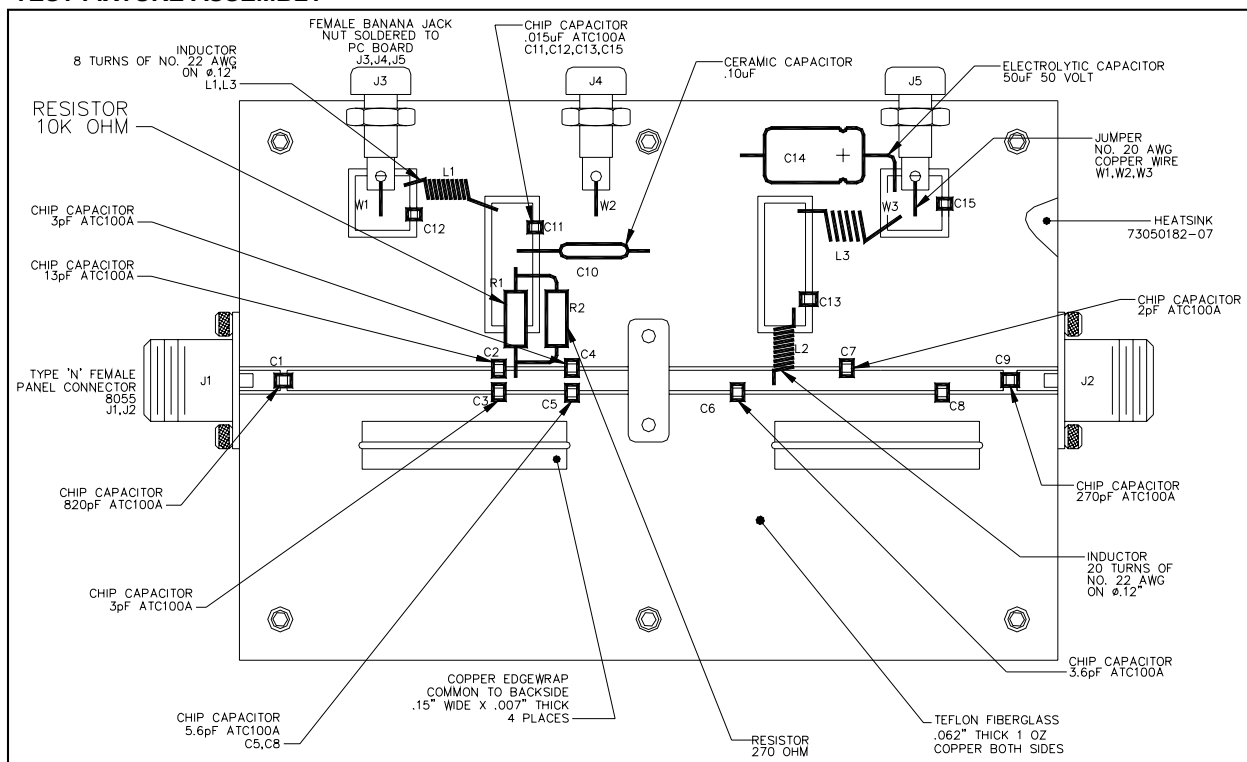

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 / Fax: 978.366.2266

• **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300

• **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.