

G6A THRU G6M




**MINIATURE
GLASS PASSIVATED RECTIFIER**
VOLTAGE: 50 TO 1000V CURRENT: 1.0A

FEATURE

Molded case feature for auto insertion
High current capability
Low leakage current
High surge capability
High temperature soldering guaranteed
250°C /10sec/0.375" lead length at 5 lbs tension
Glass Passivated chip

MECHANICAL DATA

Terminal: Plated axial leads solderable per MIL-STD 202E, method 208C
Case: Molded with UL-94 Class V-0 recognized Flame Retardant Epoxy
Polarity: color band denotes cathode
Mounting position: any

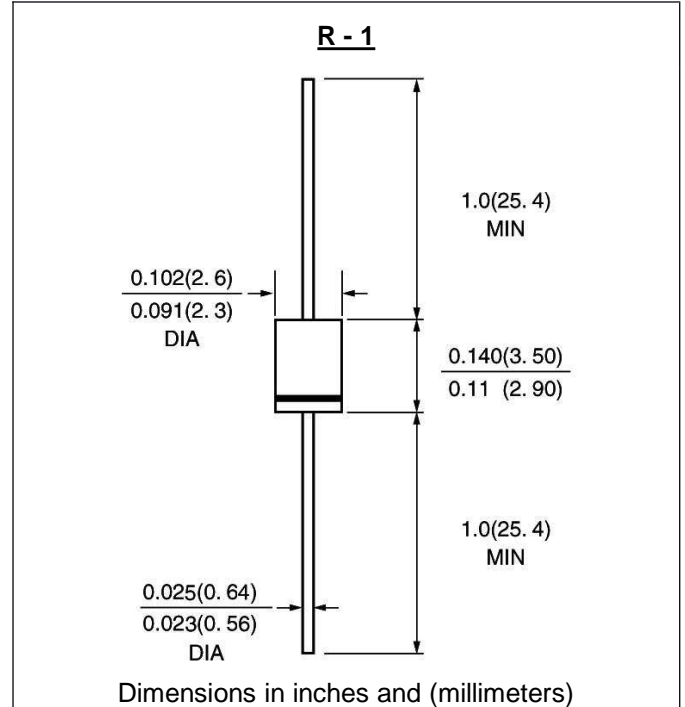

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(single-phase, half-wave, 60HZ, resistive or inductive load rating at 25°C, unless otherwise stated, for capacitive load, derate current by 20%)

	SYMBOL	G6A	G6B	G6D	G6G	G6J	G6K	G6M	units
Maximum Recurrent Peak Reverse Voltage	V _{rrm}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V _{rms}	35	70	140	280	420	560	700	V
Maximum DC blocking Voltage	V _{dc}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current 3/8" lead length at T _a =75°C	I _{f(av)}	1.0							A
Peak Forward Surge Current 8.3ms single Half sine-wave superimposed on rated load	I _{fsm}	30.0							A
Maximum Instantaneous Forward Voltage at rated forward current	V _f	1.1							V
Maximum full load reverse current full cycle at T _L =75°C	I _{r(av)}	30.0							μA
Maximum DC Reverse Current at rated DC blocking voltage	I _r	5.0 50.0							μA μA
Typical Junction Capacitance (Note 1)	C _j	15.0							pF
Operating Temperature (Note 2)	R(ja)	50.0							°C/W
Storage and Operating Junction Temperature	T _{stg} , T _j	-55 to +150							°C

Note:

1. Measured at 1.0 MHz and applied voltage of 4.0Vdc
2. Thermal Resistance from Junction to Ambient at 0.375" lead length, P.C. Board Mounted

RATINGS AND CHARACTERISTIC CURVES G6A THRU G6M

FIG. 1 - FORWARD CURRENT DERATING CURVE

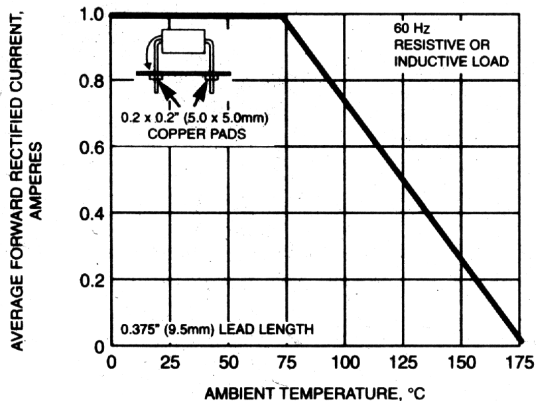


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

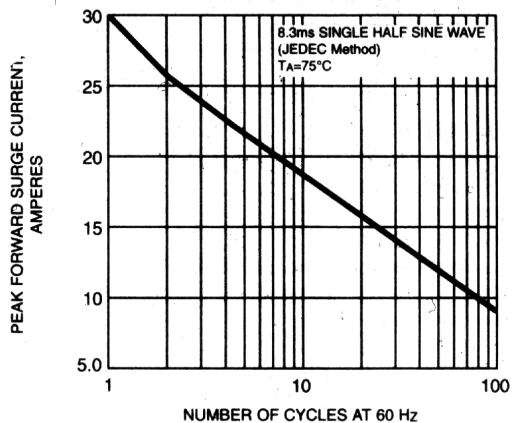


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

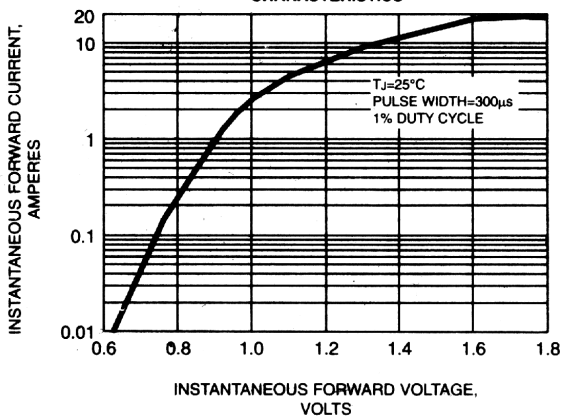


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

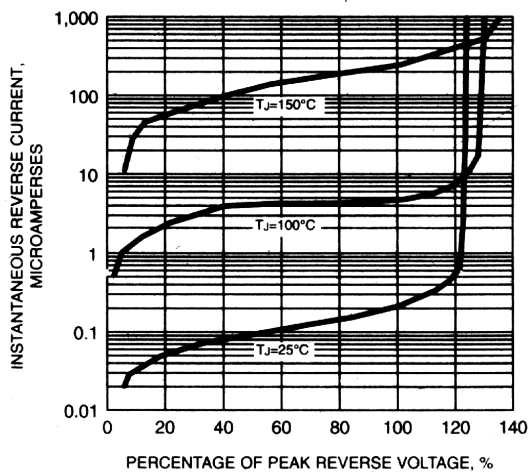


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

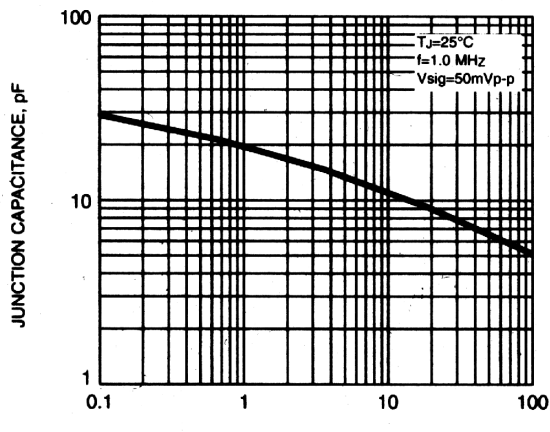


FIG. 6 - TYPICAL TRANSIENT THERMAL IMPEDANCE

