

EPA3806GE




- Designed for Maxim212/3212 & 218/3218 RS-232 Interface Chips
- Suitable for Gate Drive and other Power Applications
- Operating Temperature : -40°C to +85°C
- 5V to 5V Isolated Voltage
- 1500 Vrms Isolation


Electrical Parameters @ 25° C

Inductance (μ H Min.)	Primary ET Constant (V- μ Sec. Typ.)	DCR (Ω Max.)	
		Pins 1-3	Pins 6-4
400	27	.950	1.25
Pins 1-3	---	Pins 1-3	Pins 6-4

Schematic



Package

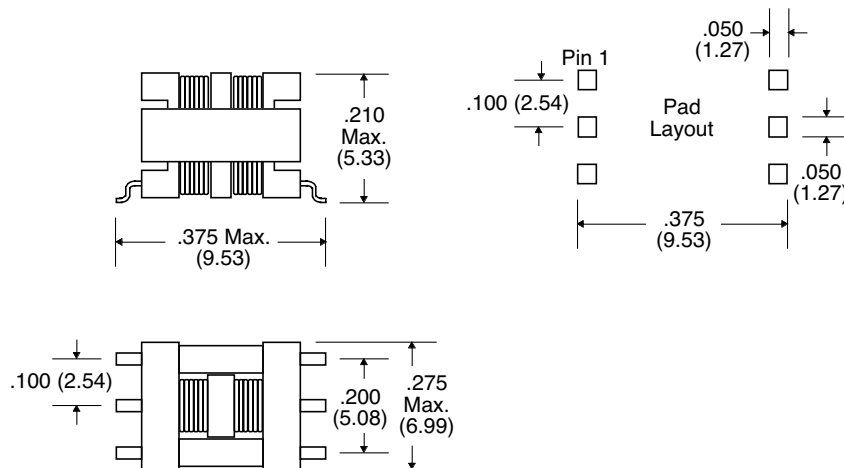

Unless Otherwise Specified Dimensions are in Inches /mm $\pm .010 / .25$